


CHARACTERISTIC

The company Keno sp. z o. o. is pleased to present you a solution using a free-standing two-arm structure..



- COMPATIBILITY WITH MOST MODULES
- REGULATION ALLOWING FOR LEVELING CONSTRUCTION
- INSTALLATION IN THE SYSTEM VERTICAL AND HORIZONTAL
- EXPANSION POSSIBILITY

[LOOK
CATALOG](#)

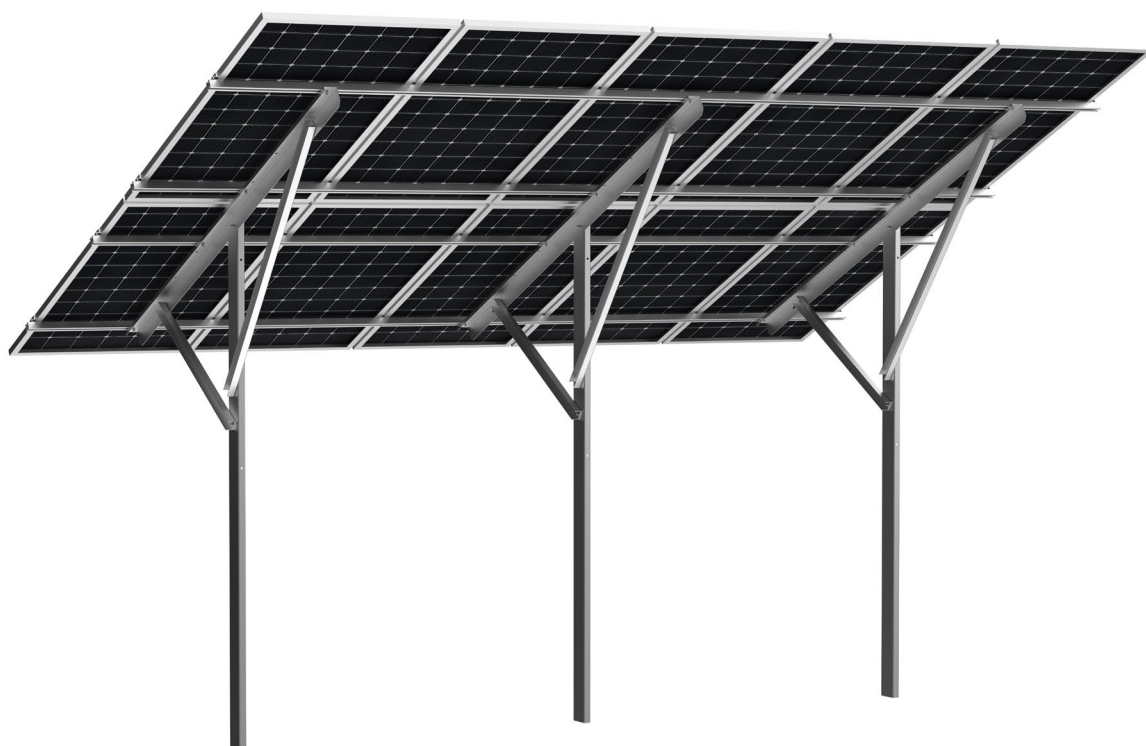

FREE-STANDING CONSTRUCTION TWO-STAGE ADJUSTABLE

FREE-STANDING CONSTRUCTION TWO-STAGE ADJUSTABLE

Keno sp. z o. o. provides a 10-year warranty for the above structure, and in the case of a structure made in the MAGNELIS coating, it is possible to extend it to 25 years. The design allows the modules to be installed in 2 rows vertically and 3 rows horizontally (see table). Installation of supports using a pile driver or excavator. The design is compatible with all mounting profiles available in the Keno sp. z o. o. offer

2 ROWS VERTICAL	3 ROWS HORIZONTALLY
module length 1800mm	module width 1052 mm

TECHNICAL DRAWING

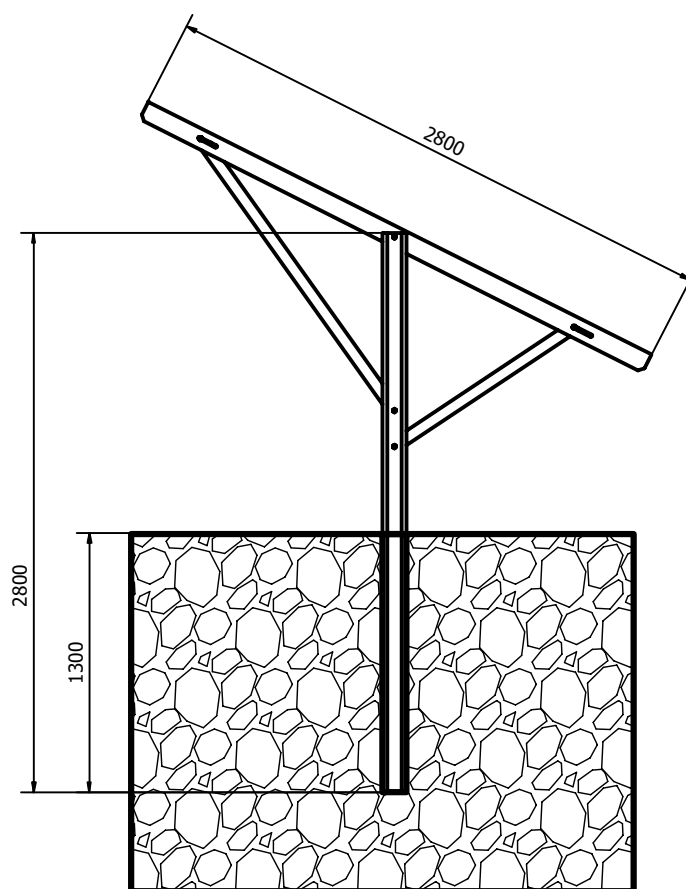


Fig.1 Dimensions of the structure