


3

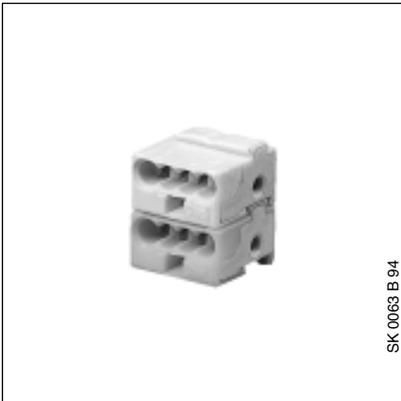

The terminal is used for connecting the second core pair of the bus cable to the second output of the power supply unit and the 4-fold connector. It can also be used for looping and branching.

When connecting the bus cable, the correct polarity should be ensured. Reverse polarity of the connections leads to one or more of the devices not functioning. Due to the reverse polarity protection built into the EIB devices, no damage occurs.

3

**Technical Data**

<b>Connections</b>	– EIB cable	2-pole, white, yellow 4-fold screwless terminals each for solid conductors 0.6 to 0.8 mm Ø
	– Bus devices	Socket contacts for pins of bus devices
<b>Type of protection</b>	– IP 20, EN 60 529 when mounted	
<b>Ambient temperature range</b>	– Operation	- 5 °C ... 45 °C
	– Storage	-25 °C ... 55 °C
	– Transport	-25 °C ... 70 °C
<b>Design</b>	– two assembled 4-fold terminals with 2 socket contacts	
<b>Mounting</b>	– clipped onto the pins of the bus device	
<b>Dimensions</b>	– 12.4 x 10 x 10 mm (H x W x D)	
<b>Weight</b>	– 0.005 kg	
<b>Certification</b>	– EIB-certified	