
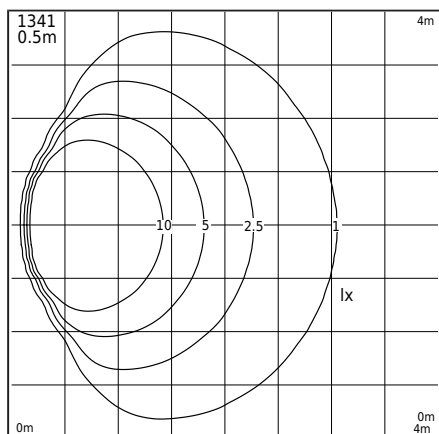
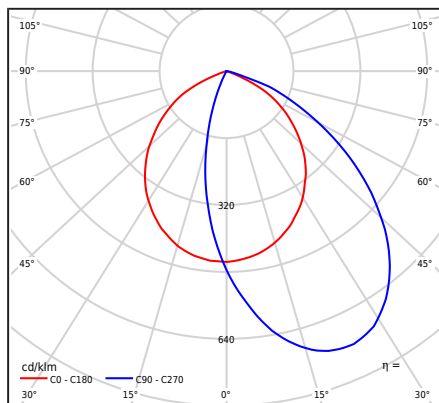


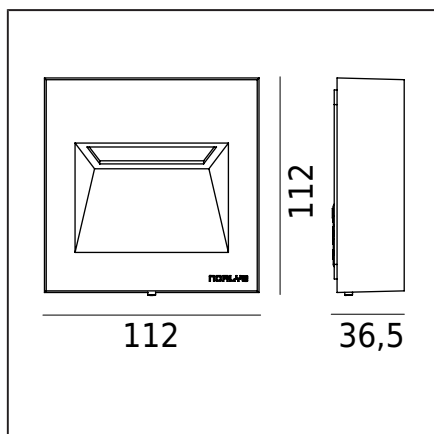

Art.nr	El.nummer	Farge	RAL
1341AL	3102474	ALUMINIUM	9006
1341GR	3102475	GRAFIT	7016

Generell informasjon

Type armatur	Veggarmatur
Materiale	Pulver lakkert aluminiumstøp Kropp - lakkert aluminium
Avdeknings materiale/optikk	Glass - herdet, frostet
Type lyskilde	LED modul AC
Lysstyring	Dimbar (Triac)
Forpakkingsstørrelse [cm]	13,5x4,5x12
LED	Lumens EDC 38C 4W xxx 230V A101 3K (⚡ Produktblad/FDV)
Effekt W	4W
Armatureffekt	4W
Modul lumen	439lm
Lumen ut	123lm
Modul effektivitet	109,8lm/W
Armatur Lumen/Watt	30,8lm/W
Fargetemperatur	3000K
Farvekonsistens (McAdam-Ellipse)	SDCM3
Fargegjengivelsesindeks	80
Beregnet levetid L70/B50 ved 25°C	>50 000h
LED fotobiologisk trussel	RG0 or RG1
Energieffektivitetsindeks (EEI)	A / ⚡ EPREL
Virkningsgrad	PF>0,98
THD-faktor	< 20%
Ta nominel:	+25°C
Maksimal omgivelsestemperatur	-35...+45°C
Inrush current	17mA / 60ms

Filer som kan lastes ned

Photometric LDT files, Photometric IES files, Manual, BIM Revit, BIM ArchiCAD