



CHARACTERISTIC

Keno sp.z o.o. is pleased to present you a solution for use on all tiled roofs. This design is characterized by a wide range of handles, each of which has many adjustments..

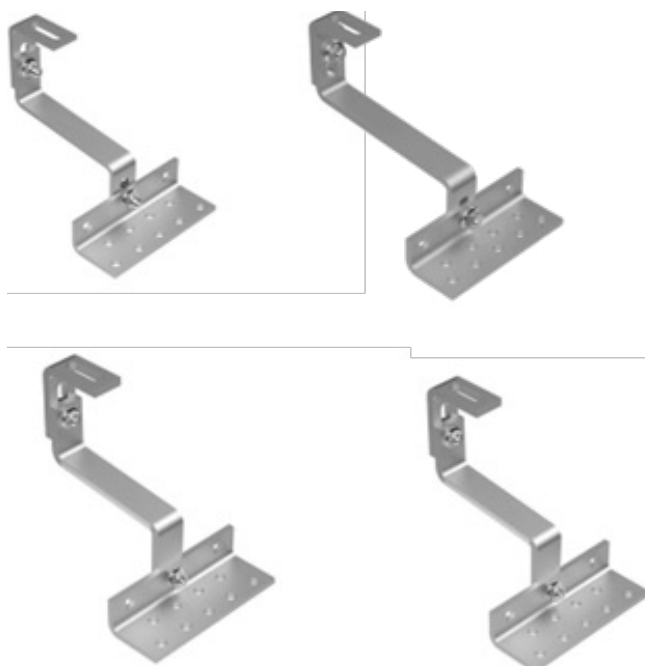

- EASY AND QUICK INSTALLATION
- INCREASED MOBILITY THANKS TO FIVE-POINT ADJUSTMENT
- COMPATIBILITY WITH MOST ROOF TILES

[SEE
CATALOG](#)

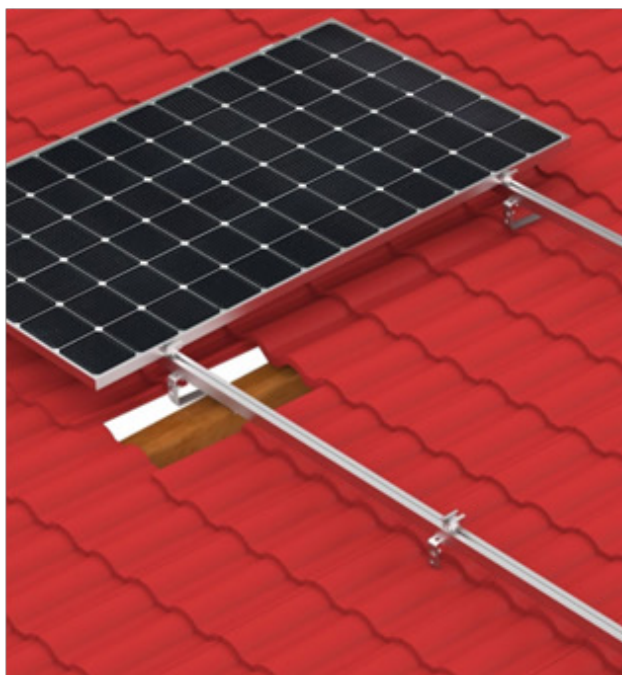

DESCRIPTION OF THE CONSTRUCTION ON A SLOPING ROOF, COVERED WITH A TILE

The hook was made with the greatest care and quality. Keno sp.z o.o. provides a 10-year warranty for the above structure due to the fact that the element is made of stainless steel. We have increased its service life by subjecting it to shot-blasting treatment. This process makes it possible to extend the resistance of the hook to weather conditions and to remove burrs, which reduces a point impact on the tile. The holder is installed by attaching it to the roof rafters with the use of at least two K-16 screws with a specially designed wood thread. Thanks to the triple adjustment, the hook can be adapted to most standard tiles that are available on the market. The hook is compatible with all mounting profiles available from Keno sp.z o.o. The hook is mounted with the profile using a „T” type screw, which enables the hook to be mounted at any point in the profile.

K-12 HOOKS

K-12	K-12-L	K-12+3	K-12-S
SCOPE: 0-120mm	SCOPE: 120-150mm	SCOPE: 30mm	SCOPE: 300m above sea level.

TECHNICAL DRAWING

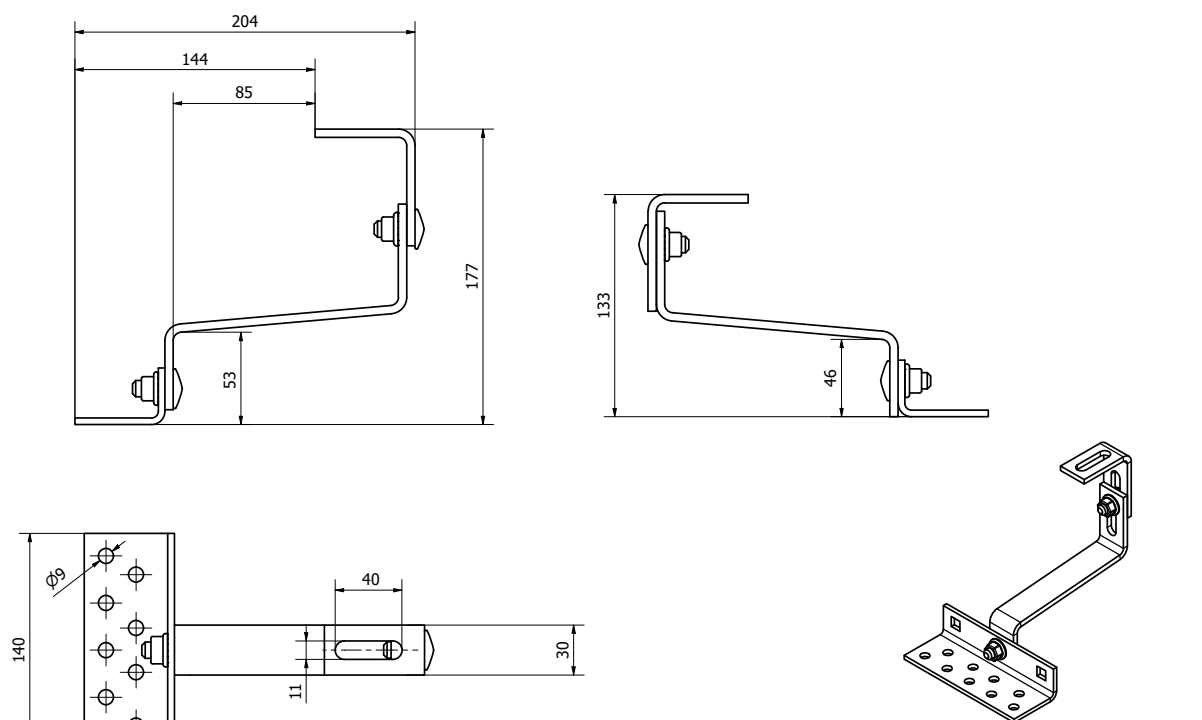


FIG1 K-12 Element dimensions

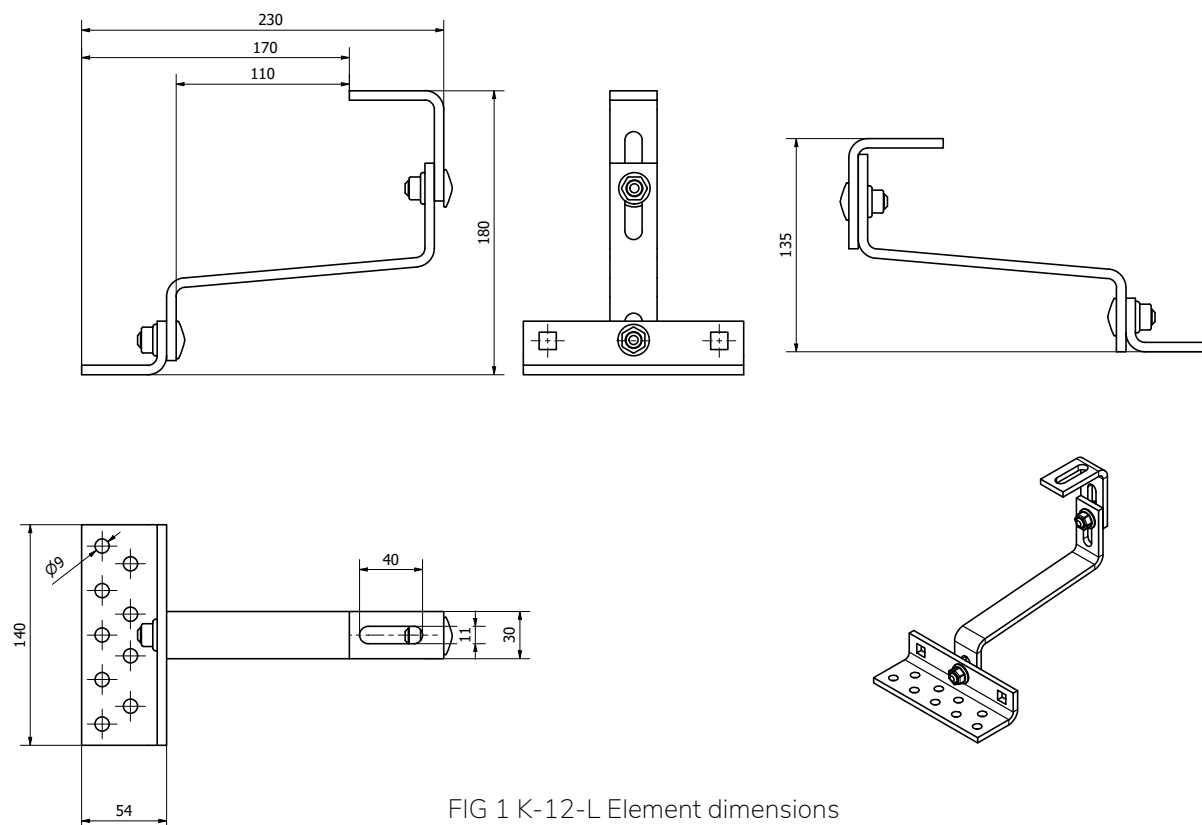


FIG 1 K-12-L Element dimensions

TECHNICAL DRAWING

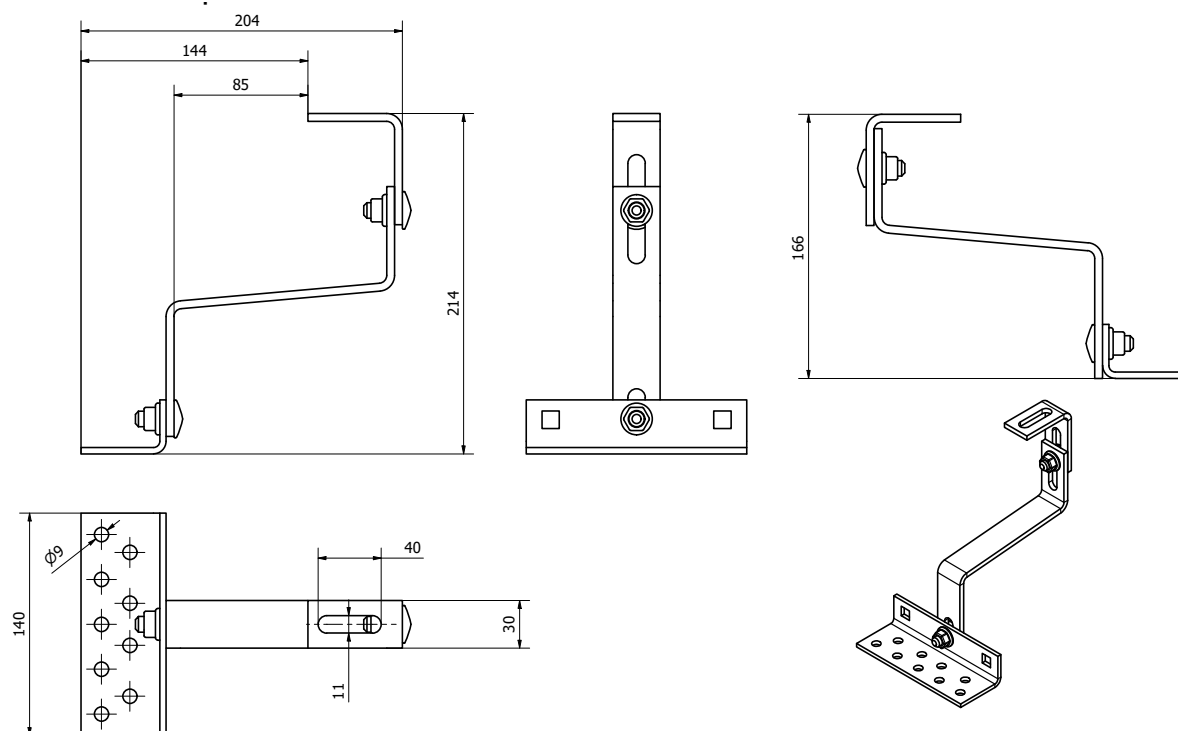


Fig. 3 K-12+3 Element dimensions

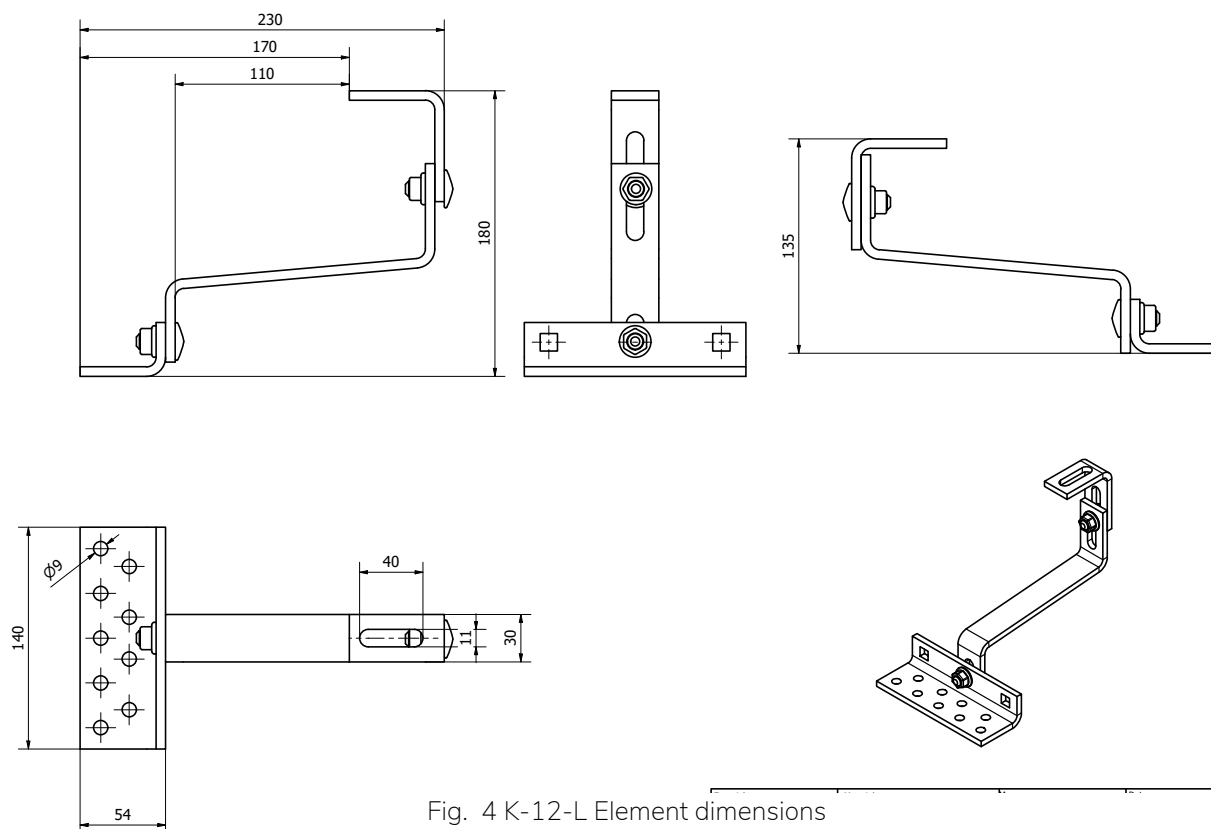


Fig. 4 K-12-L Element dimensions