



SL4/SL7 SIGNAL TOWERS
171354



Overview




Specifications



Resources

Contact



171354

Eaton Moeller® series SL4 Flashing light module; c



How to buy

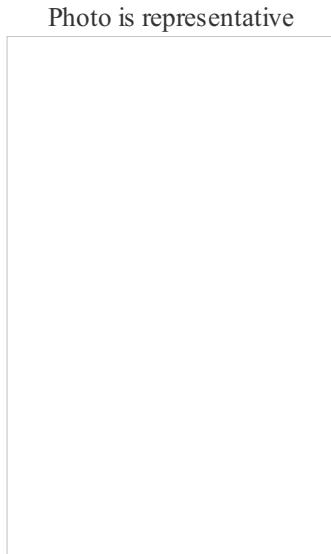


Photo is representative

Photo is representative




Photo is representative




Photo is representative



Designed to work together

Discover other Eaton products and accessories built to enhance this product.

171297

Eaton Moeller® series SL4 Base module;100-mm aluminum tube and foot

171311

Eaton Moeller® series SL4 Base module;connection to SmartWire-DT

171304

Eaton Moeller® series SL4 Base module;for vertical mounting on both sides

171298

Eaton Moeller® series SL4 Base module;250-mm aluminum tube

[View more](#)[View less](#)

GENERAL SPECIFICATIONS

General specifications



PRODUCT NAME	Eaton Moeller® series SL4 Flashing light module
CATALOG NUMBER	171354
MODEL CODE	SL4-BL230-A
EAN	4015081678877
PRODUCT LENGTH/DEPTH	43 mm
PRODUCT HEIGHT	75 mm
PRODUCT WIDTH	43 mm
PRODUCT WEIGHT	0.043 kg

UL

Certified by UL for use in Canada

CSA Class No.: NKCR7

IEC/EN 60529

UL File No.: E29184

IEC/EN 60947-5-1

UL report applies to both US and Canada

CSA-C22.2 No. 94-91

CE

UL Category Control No.: NKCR

UL 508

CSA-C22.2 No. 14-10

CERTIFICATIONS

PRODUCT SPECIFICATIONS

PRODUCT CATEGORY	SL signal towers
ENCLOSURE COLOR	Black
RADIATION ANGLE	360 °
LEAKAGE CURRENT	0.003 A
OUTSIDE DIAMETER	43 mm

LIGHT MODULES	LED
RATED OPERATIONAL VOLTAGE (UE) AT AC - MIN	230 V
FLASHING FREQUENCY	2 Hz
LIGHT TYPE	Flashing light
DEGREE OF PROTECTION	NEMA 4X IP66

OVERVOLTAGE CATEGORY	III
RATED OPERATIONAL VOLTAGE (UE) AT DC - MIN	0 V
RATED OPERATIONAL VOLTAGE (UE) AT DC - MAX	0 V
AMBIENT OPERATING TEMPERATURE - MAX	60 °C
RATED OPERATIONAL VOLTAGE (UE) AT AC - MAX	240 V
POLLUTION DEGREE	3
CLIMATIC PROOFING	Damp heat, cyclic, to IEC 60068-2-30 Damp heat, constant, to IEC 60068-2-78
COLOR	Orange
RATED IMPULSE WITHSTAND VOLTAGE (UIMP)	4000 V AC
CONNECTION TO SMARTWIRE-DT	No
FUNCTIONS	Blinker light
MATERIAL	Enclosure: Polycarbonate (PC) Cap: Polycarbonate (PC)
LAMP TYPE	LED
LIFESPAN, ELECTRICAL	100,000 h
AMBIENT OPERATING TEMPERATURE - MIN	-30 °C
TYPE	Flashing light module
MOUNTING POSITION	As required
CURRENT CONSUMPTION	0.03 A, at 230/240 V AC
SHOCK RESISTANCE	15 g, Mechanical, According to IEC/EN 60068-2-27 11 ms Mechanical, According to IEC/EN 60068-2-27
VOLTAGE TYPE	AC
NUMBER OF MODULES	Max. 5 (with standard base) Max. 10 (with base for mounting on both sides)
RATED INSULATION VOLTAGE (UI)	250 V

Brochures

Catalogs

Certification reports


Drawings

eCAD model

Installation instructions

Installation videos

mCAD model



[Contact me](#)

171354



Eaton is an intelligent power management company dedicated to improving the quality of life and protecting the environment for people everywhere. We are guided by our commitment to do business right, to operate sustainably and to help our customers manage power—today and well into the future. By capitalizing on the global growth trends of electrification and digitalization, we're accelerating the planet's transition to renewable energy and helping to solve the world's most urgent power management challenges.

