SLASL7 SIGNAL TOWERS 171284 171284 Eaton Moeller® series SL7 Acoustic module;24* tone; external actuation Photo is representative Photo is representative						Products Dig
Eaton Moeller® series SL7 Acoustic module;24 tone; external actuation How to buy		TOWERS	 Specificat	tions		Con
	<	Photo is representative		Eaton Moeller tone;external a	® series SL7 Ao actuation	coustic module;24 \

Photo is representative

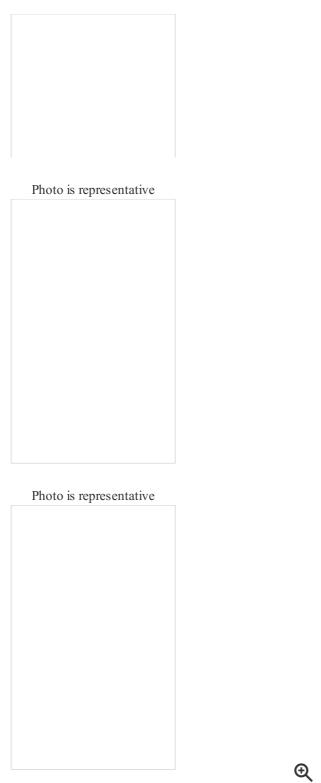


Photo is representative

< >

Designed to work together

Discover other Eaton products and accessories built to enhance this product.

Eaton Moeller® series SL7 Base module; for vertical mounting on one sides

171443

Eaton Moeller® series SL7 Base module;100-mm aluminum tube and foot

177351

Eaton Moeller® series SL7 Basic module, one-sided vertical mounting, max. 3 modules, M12A

171445

Eaton Moeller® series SL7 Base module; 400-mm aluminum tube

View more

View less

GENERAL SPECIFICATIONS

		GENERAL SI ECIFICATIONS			
General specifications	>	PRODUCTNAME	Eaton Moeller® series SL7 Acoustic module		
•		CATALOG NUMBER	171284		
Product specifications	>	MODEL CODE	SL7-AP24-E		
		EAN	4015081678297		
		PRODUCT LENGTH/DEPTH	73 mm		
		PRODUCTHEIGHT	71 mm		
		PRODUCTWIDTH	73 mm		
		PRODUCTWEIGHT	0.101 kg		
		WARRANTY	2 year		
		COMPLIANCES	CE Marked		
			CS A Cartified		

CSA Certified UL Listed UL 508 cULus Listed CSA Std. C22.2 No. 14-10

CSA Std. C22.2 No. 94-91 CSA Class No. NKCR7 UL Listed file E29184

IEC Rated UL

> CSA-C22.2 No. 14-10 CSA-C22.2 No. 94-91

UL report applies to both US and Canada

CSA Class No.: NKCR7 UL File No.: E29184

CERTIFICATIONS

3/7

UL Category Control No.: NKCR IEC/EN 60529 IEC/EN 60947-5-1 CE Certified by UL for use in Canada

CATALOG NOTES

n

PRODUCT SPECIFICATIONS

PRODUCT CATEGORY	SL signal towers
RATED OPERATIONAL CURRENT (IE) - MAX	92 A
LOUDNESS	100 dB Can be adjusted with built-in potentiometer
RADIATION ANGLE	360 °
DECIBEL	100 dB
LEAKAGE CURRENT	0.003 A
ENCLOSURE	UL type 4, 4X, 13
O UTSIDE DIAMETER	73 mm
ACCESSORIES	Internal potentiometer
RATED OPERATIONAL VOLTAGE (UE) AT AC - MIN	24 V
FREQUENCY RATING	2800 Hz
ALARM TYPE	Tone adjustable 2 types of sound Can be externally actuated Pulsed tone Continuous tone
ENVIRONMENTAL RATING	IP66
VOLTAGERATING	24 Vac/Vdc
ACTUATOR	External actuation
RATED OPERATIONAL VOLTAGE (UE) AT DC - MIN	24 V
DEGREE OF PROTECTION	NEMA 13 IP66
OVERVOLTAGE CATEGORY	Ш
RATED OPERATIONAL VOLTAGE (UE) AT DC - MAX	24 V
NUMBER OF INPUTS	2 assigned
AMBIENT OPERATING TEMPERATURE - MAX	60 °C
RATED OPERATIONAL VOLTAGE (UE) AT AC - MAX	24 V

POLLUTION DEGREE	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30		
CLIMATIC PROOFING			
COLOR	Black		
RATED IMPULSE WITHSTAND VOLTAGE (UIMP)	4000 V AC		
QUANTITY	1		
FEATURES	Sound pressure adjustable to a minimum of 88 dB		
CONNECTION TO SMARTWIRE-DT	No		
FUNCTIONS	Continuous tone/pulse tone		
MATERIAL	Enclosure: Polycarbonate (PC) Cap: Polycarbonate (PC)		
AMBIENT OPERATING TEMPERATURE - MIN	-30 °C		
SERIES	SL7		
ТУРЕ	Acoustic module		
MOUNTING POSITION	As required Place only at the highest position on a pole		
CURRENT CONSUMPTION	0.092 A, at 24 V AC/DC		
MODEL	Continuous tone		
RATED OPERATIONAL CURRENT	92 A maximum		
SHOCK RESISTANCE	Mechanical, According to IEC/EN 60068-2-27 15 g, Mechanical, According to IEC/EN 60068-2-27 11 ms		
VOLTAGETYPE	AC/DC		
RATED INSULATION VOLTAGE (UI)	250 V		
NUMBER OF MODULES	2		

Catalogs

Certification reports

Drawings

eCAD model				
Installation instructions				
Installation videos				
mCAD model				
Specifications and datasheets				
	Contact me			
171284				

Eaton is an intelligent power management company dedicated to improving the quality of life and protecting the environment for people everywhere. We are guided by our commitment to do business right, to operate sustainably and to help our customers manage power—today and well into the future. By capitalizing on the global growth trends of electrification and digitalization, we're accelerating the planet's transition to renewable energy and helping to solve the world's most urgent power management challenges.