



Hovedkarakteristikk

Produktspekter	Modicon TSX Micro automation platform
Produkt eller komponent type	Discrete input module
Discrete input number	32 screw terminal block
Discrete input voltage	19...30 V 24 V DC positive eller negativ
Discrete input current	7 mA
Input voltage limits	< 5 V ved possisjon 0 >= 11 V ved possisjon 1
Nåværende tilstand 0 garantert	<= 2 mA
Nåværende tilstand 1 garantert	>= 6 mA
Inngangsimpedans	3.4 Ohm
Responstid	0.1...7.5 ms at state 1 to state 0 0.1...7.5 ms at state 0 to state 1

Alternativer

Standarder	IEC 1131-2 Type 2
Input compatibility	2/3-wire proximity sensors PNP/NPN
Discrete input type	Current sink
Strømforbruk	254 mA Positiv
Isolation voltage	1500 V AC 1 s

Miljø


vekt	0.29 kg
------	---------

Bærekraftig

Bærekraftig	Ikke et Green Premium produkt
RoHS (datokode: YYWW)	Will not be Compliant

Sensors/Inputs Connections

Wiring Diagram

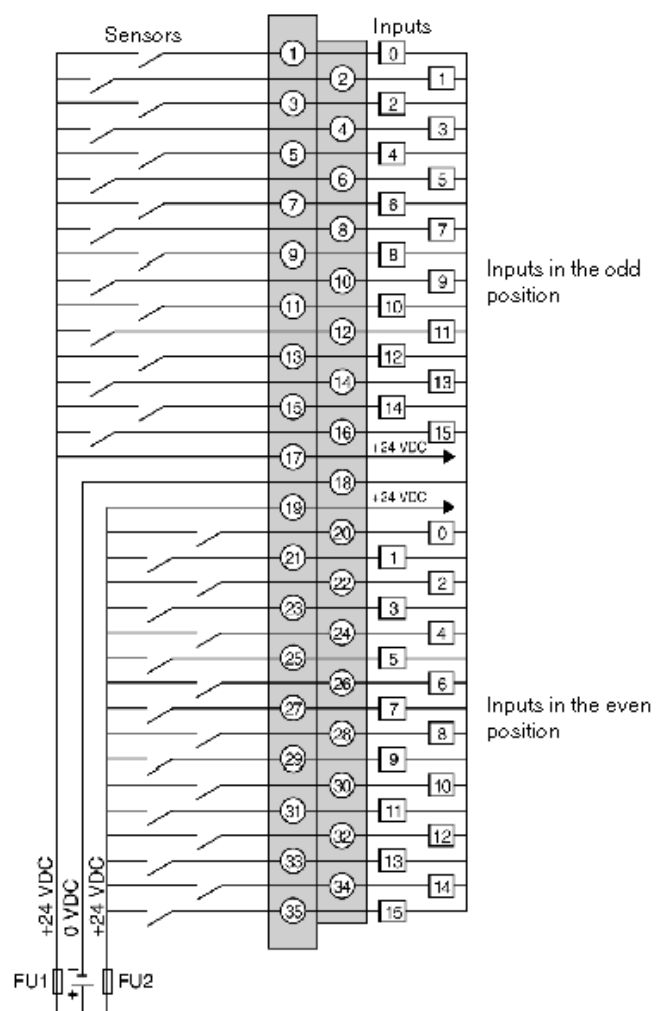

FU1 and FU2 = 0.5A rapid fusion fuses.