


Data Sheet EKO50065


Product:	Keycard switch [1/2/6] screw
E-number NO:	14 708 77
E-number SV:	18 400 81
E-number FI:	21 046 83
EAN:	7020160500656
Packing:	5
Color:	Pure white

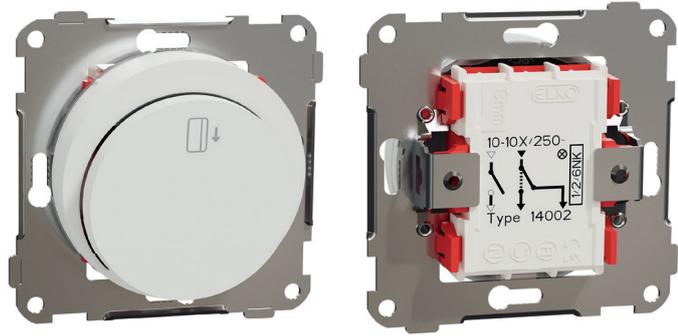


Product description: ELKO One hotel keycard switch for 1-pole/2-pole/two-way connection. In OFF position a white LED light is indicating, where to put in the keycard. Claw-kit EKO04848 can be used for additional fixation to the flush wall-box when needed. It is provided with screw terminals with the wire entrance on the side. Its Ue rated operational voltage is 250VAC. Its Ie rated operational current is 10A. To be mounted in a suitable 1 to 5-gang cover frame for flush cc 60mm wall-box installation or 1 to 3-gang low or high surface mounted box for surface installation, as well as in a corner box. The dimensions of the product are (W) 71mm x (H) 71mm x (D) 30mm. It is made of recycled Polycarbonate (PC). The color of the product is pure white (RAL 9003) with matt surface finish. It reaches IP21 degrees of protection with IK07 impact strength.

One range by ELKO is covering Wiring Devices, Stand Alone Electronics and Network Connectivity functions for both flush as well as surface installation. The One range has been developed with sustainability in mind, using recycled plastic and recycled packaging material. Modern and slim design with a smooth matt surface finish that is reflecting the light in a glowing way due to it's shape.

Dimensions

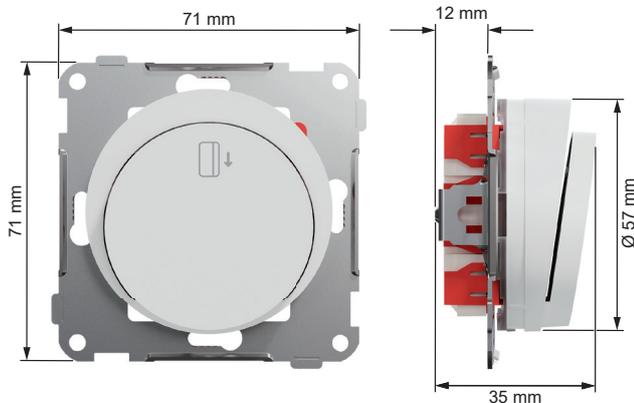

Wiring diagram

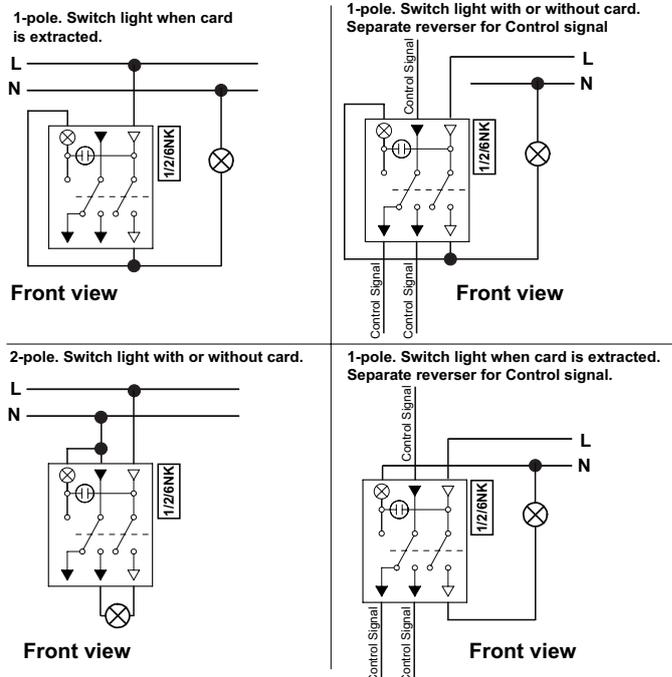

▲ ▲ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH
 The product must be installed and connected by a qualified electrician.
 A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.