

FDV

High Bay Pyramid 200

El nr	33 179 20
Article nr	720019
EAN	7090015375685



LUMILEDS

PHILIPS

Lysteknikk

Type lyskilde	LED (Lumileds SMD LED)
Spenning	230VAC 50/60Hz
Watt	198W
Systemeffekt (W)	200W
Effektiv lysstrøm (lm)	26300 lm
Effekt	132 lm/W
Fargetemperatur	4000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid (IEC62717 Ta25)	100 000h L80B50
Lysspredning	90°
Driftstemperatur	-40°C <ta< 65°C

LED Driver

Type	1-10V
Driftsstrøm	1050mA Konstantstrøm

Beskyttelse


Isolasjonsklasse	Klasse I
IP-grad (armaturhus)	IP65
IP-grad (driver)	IP66
IK-grad	IK10

Materialer og overflater

Armaturhus	Aluminium
Farge	Sort (RAL9005)
Optikk	PC

Energi og godkjenning

Inneholder lyskilde med Eneriklasse	E
Godkjenning	CE, RoHS
Safety standard	EN 55015:2013+A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-2:2013, EN 60598-2-5:2015, EN 60598-1:2015

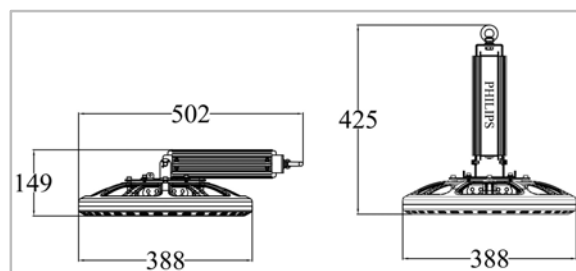

Montering/Tilkobling

Montering	Nedhengt
Kabling	1,5m ledning AC 1,5m ledning DIM

Dimensjoner (mm)

Diameter (D)	Ø388 mm
Høyde (H)	425 mm
Vekt	4,70 kgs

Forpakning

Kartong Dimensjon	440x440x220 mm
Antall/Kartong	1 stk
Kartong Vekt	6 kgs