

FDV

Optilux Bucket Pendel

El nr	32 416 02
Article nr	292504
EAN	7090015374657



Lysteknikk

Type lyskilde	SMD LED
Spennning	90-305VAC 50/60Hz
Watt	15W
Systemeffekt (W)	18W
Effektiv lysstrøm (lm)	1530lm
Effekt	85lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM≤3
Levetid (IEC 62717 Ta25)	50 000h L80B50
Lysspredning	60°
Driftstemperatur	-20°C <ta< 45°C

LED Driver

Type	Dimbar faseavsnitt
Driftsstrøm	250mA Konstantstrøm

Beskyttelse


Isolasjonsklasse	Klasse I
IP-grad	IP20
IK-grad	IK08

Materialer og overflater

Armaturhus	Aluminium, PC
Farge	Matt hvit (RAL 9016)

Energi og godkjenning

Inneholder lyskilde med Energiklasse	F
Godkjenning	CE, RoHS
Safety standard	EN 60598-1:2015, EN 60598-2-1:1989, EN 62031:2008 +A1:2013 +A2:2015
EMC standard	EN 55015:2013+A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013

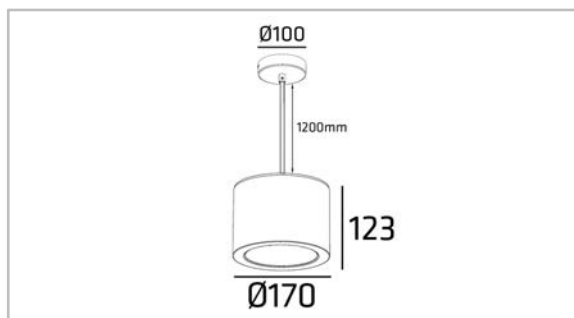

Montering/Tilkobling

Montering	Nedhengt
Kabling	Hurtigklemme

Dimensjoner (mm)

Lengde (L)	1200 mm
Bredde (W)	Ø170 mm
Høyde (H)	123 mm
Vekt	0,83 kgs

Forpakning

Eske dimensjon	205x205x200 mm
Eske Vekt	1,10 kgs
Kartong Dimensjon	425x425x626 mm
Antall/Kartong	12 stk
Kartong Vekt	12,00 kgs