




# FDV

## Sola SMD

|            |               |
|------------|---------------|
| El nr      | 32 105 15     |
| Article nr | 515106        |
| EAN        | 7090015375661 |



LUMILEDS

AkzoNobel

### Lysteknikk

|                          |                        |
|--------------------------|------------------------|
| Type lyskilde            | LED (Lumileds SMD LED) |
| Spennings                | 100-277VAC 50/60Hz     |
| Watt                     | 139,2W                 |
| Systemeffekt (W)         | 150W                   |
| Effektiv lysstrøm (lm)   | 22500 lm               |
| Effekt                   | 150 lm/W               |
| Fargetemperatur          | 4000K                  |
| Fargegjengivelse (CRI)   | Ra>80                  |
| MacAdams faktor          | SDCM<3                 |
| Levetid (IEC 62717 Ta25) | 100 000h L80B50        |
| Lysspredning             | 80x150°                |
| Driftstemperatur         | -30°C <ta<45°C         |

### LED Driver

|             |                      |
|-------------|----------------------|
| Type        | Ikke Dimbar          |
| Driftsstrøm | 2900mA Konstantstrøm |

### Beskyttelse


|                      |          |
|----------------------|----------|
| Isolasjonsklasse     | Klasse I |
| IP-grad (armaturhus) | IP65     |
| IP-grad (driver)     | IP67     |
| IK-grad              | IK10     |

### Materialer og overflater

|            |                    |
|------------|--------------------|
| Armaturhus | Aluminium Die-cast |
| Farge      | Mørk grå (RAL7024) |
| Optikk     | PC                 |

### Energi og godkjenning

|                                     |                                                                                 |
|-------------------------------------|---------------------------------------------------------------------------------|
| Inneholder lyskilde med Eneriklasse | E                                                                               |
| Godkjenning                         | CE, RoHS                                                                        |
| Safety standard                     | EN 60698-1:2015, AMD1:2018, EN 60598-2-3:2003, AMD1:2011, EN 62031:2008+A1:2013 |
| EMC standard                        | EN 61547:2009, EN55015: 2013+A1: 2015, EN 61000-3-2:2014, EN 61000-3-3:2013     |

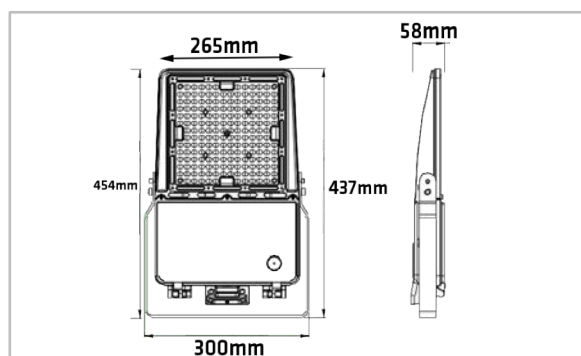

### Montering/Tilkobling

|           |                 |
|-----------|-----------------|
| Montering | Utenpåliggende  |
| Kabling   | 1,5m ledning AC |

### Dimensjoner (mm)

|            |          |
|------------|----------|
| Lengde (L) | 265 mm   |
| Høyde (H)  | 437 mm   |
| Bredde (W) | 58 mm    |
| Vekt       | 4,80 kgs |

### Forpakning

|                   |                |
|-------------------|----------------|
| Kartong Dimensjon | 475x125x345 mm |
| Antall/Kartong    | 1 stk          |
| Kartong Vekt      | 5,30 kgs       |