



FDV

Sola Eco

El nr	35 855 23
Article nr	515016
EAN	7090015371090

Lysteknikk

Type lyskilde	LED (Lumileds SMD LED)
Spennning	100-277VAC 50/60Hz
Watt	135W
Systemeffekt (W)	150W
Effektiv lysstrøm (lm)	19500 lm
Effekt	130 lm/W
Fargetemperatur	4000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid (IEC 62717 Ta25)	100 000h L80B50
Lysspredning	80x150°
Driftstemperatur	-30°C <ta<45°C

LED Driver

Type	Ikke Dimbar
Driftsstrøm	2900mA Konstantstrøm

Beskyttelse


Isolasjonsklasse	Klasse I
IP-grad (armaturhus)	IP65
IP-grad (driver)	IP67
IK-grad	IK10

Materialer og overflater

Armaturhus	Aluminium Die-cast
Farge	Mørk grå (RAL7024)
Optikk	PC


Energi og godkjenning

Inneholder lyskilde med Energiklasse	D
Godkjenning	CE, RoHS
Safety standard	EN 60698-1:2015, AMD1:2018, EN 60598-2-3:2003, AMD1:2011, EN 62031:2008+A1:2013
EMC standard	EN 61547:2009, EN55015:2013+A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013



LUMILEDS

AkzoNobel

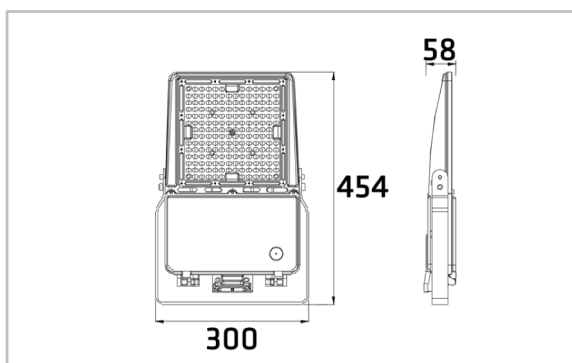

Montering/Tilkobling

Montering	Utenpåliggende
Kabling	1,5m ledning AC

Dimensjoner (mm)

Lengde (L)	300 mm
Høyde (H)	454 mm
Bredde (W)	58 mm
Vekt	4,60 kgs

Forpakning

Kartong Dimensjon	475x125x345 mm
Antall/Kartong	1 stk
Kartong Vekt	4,80 kgs