



# FDV

## Sola Eco

|            |               |
|------------|---------------|
| El nr      | 35 855 24     |
| Article nr | 530016        |
| EAN        | 7090015376163 |

### Lysteknikk

|                          |                        |
|--------------------------|------------------------|
| Type lyskilde            | LED (Lumileds SMD LED) |
| Spennings                | 100-277VAC 50/60Hz     |
| Watt                     | 270W                   |
| Systemeffekt (W)         | 300W                   |
| Effektiv lysstrøm (lm)   | 39000 lm               |
| Effekt                   | 130 lm/W               |
| Fargetemperatur          | 4000K                  |
| Fargegjengivelse (CRI)   | Ra>80                  |
| MacAdams faktor          | SDCM<3                 |
| Levetid (IEC 62717 Ta25) | 100 000h L80B50        |
| Lysspredning             | 80x150°                |
| Driftstemperatur         | -30°C <ta<45°C         |

### LED Driver

|             |                      |
|-------------|----------------------|
| Type        | Ikke Dimbar          |
| Driftsstrøm | 6200mA Konstantstrøm |

### Beskyttelse


|                      |          |
|----------------------|----------|
| Isolasjonsklasse     | Klasse I |
| IP-grad (armaturhus) | IP65     |
| IP-grad (driver)     | IP67     |
| IK-grad              | IK10     |

### Materialer og overflater

|            |                    |
|------------|--------------------|
| Armaturhus | Aluminium Die-cast |
| Farge      | Mørk grå (RAL7024) |
| Optikk     | PC                 |


### Energi og godkjenning

|                                     |                                                                                 |
|-------------------------------------|---------------------------------------------------------------------------------|
| Inneholder lyskilde med Eneriklasse | D                                                                               |
| Godkjenning                         | CE, RoHS                                                                        |
| Safety standard                     | EN 60698-1:2015, AMD1:2018, EN 60598-2-3:2003, AMD1:2011, EN 62031:2008+A1:2013 |
| EMC standard                        | EN 61547:2009, EN55015:2013+A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013       |



LUMILEDS

AkzoNobel

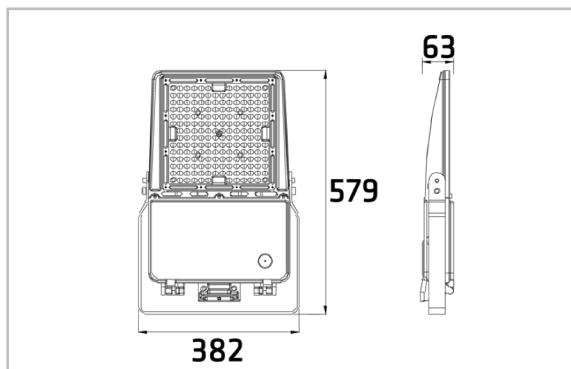

### Montering/Tilkobling

|           |                 |
|-----------|-----------------|
| Montering | Utenpåliggende  |
| Kabling   | 1,5m ledning AC |

### Dimensjoner (mm)

|            |          |
|------------|----------|
| Lengde (L) | 382 mm   |
| Høyde (H)  | 579 mm   |
| Bredde (W) | 63 mm    |
| Vekt       | 6,90 kgs |

### Forpakning

|                   |                |
|-------------------|----------------|
| Kartong Dimensjon | 585x145x435 mm |
| Antall/Kartong    | 1 stk          |
| Kartong Vekt      | 7,40 kgs       |