



FDV

Europa 1 DALI

El nr	32 840 13
Article nr	241514
EAN	7090015371441



Lysteknikk

Type lyskilde	LED (Bridgelux SMD LED)
Spennings	230VAC 50/60Hz
Watt	15W
Systemeffekt (W)	17W
Effektiv lysstrøm (lm)	1950lm
Effekt	114,7lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid (IEC 62717 Ta25)	60 000h L80B50
Lysspredning	90°
Driftstemperatur	-25°C <ta< 45°C

LED Driver

Type	DALI
Driftsstrøm	450mA Konstantstrøm

Beskyttelse


Isolasjonsklasse	Klasse II
IP-grad	IP65

Materialer og overflater

Armaturhus	Aluminium die-cast
Farge	Matt hvit (RAL 9010)
Optikk	Acrylic

Energi og godkjenning

Inneholder lyskilde med Energiklasse	E
Godkjenning	CE, RoHS
Safety standard	EN 69598-2-2:2012 used in conjunction with EN 60598-1:2008+A11:2009, EN 62031:2008+A1:2013, EN 62471:2008
EMC standard	EN 55015:2013, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009

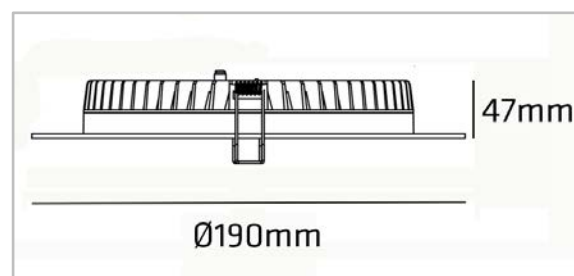

Montering/Tilkobling

Montering	Innfelling
Kabling	1,5m ledning + Euro plugg

Dimensjoner (mm)

Høyde (H)	47 mm
Diameter (D)	Ø190 mm
Innfellingsdiameter	Ø170-180 mm
Vekt	0,79kgs

Forpakning

Eske dimensjon	220x205x75 mm
Eske Vekt	0,83 kgs
Kartong Dimensjon	460x430x250 mm
Antall/Kartong	12 stk
Kartong Vekt	12,00 kgs