

PHILIPS


CoreLine

 Innovative

 Easy to install

 High quality

REAL
PROs
REAL
QUALITY

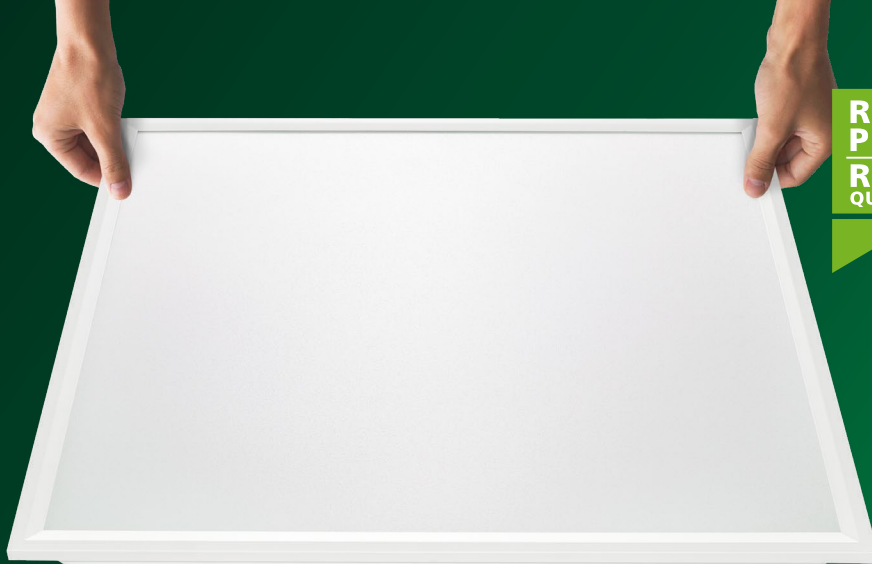

What real pros like: More efficiency, less hassle

The new Philips CoreLine panel: Easy to install and maintain, improved energy efficiency, and more product options than ever before

Product highlights



Improved energy efficiency compared to previous generation: from 123 lm/W to 140 lm/W



Very long service life of up to 100,000 hours (L80)*



Easy and flexible installation thanks to multiple quick connector options

[See next page for details](#)



UltraEfficient versions available with efficacy of up to 160 lm/W



New All-in features:
Multi Lumen and Multi ColorTemperature switches for more installation flexibility

[See next page for details](#)



Connectivity options available (DALI/Interact Ready) – for innovative smart lighting installations

[See page 3 for details](#)



Lighting the way to a more sustainable future

- Highly energy-efficient with efficacy of up to 140 lm/W. Also available as special UltraEfficient (UE) versions with efficacy of up to 160 lm/W.
- Fulfills criteria for government subsidy programs for energy-efficient lighting
- Environmental Product Declaration available
- Maintainable drivers help reduce waste by allowing easy replacement, eliminating the need to replace the entire luminaire
- Product packaging contains 70% less plastic than the previous generation
- Most products are packed in 100% recycled cardboard

Wide range of options for ultimate solutions



Easy and fast installation

- Quick connector – simply detach, wire and re-connect luminaire
- Multiple connector options available: Green/white, Flywire, Wago, Schuko
- Green quick connector fits on Wieland plugs

Versatile application

- Square (60 × 60 cm; 62 × 62 cm) and rectangular (30 × 120 cm) versions available
- Various ingress protection class options (front/back): IP65/IP65, IP65/IP20, IP44/IP20, IP40/IP20
- Wide range of accessories
- Smooth surface of light for compliance with office norms
- Different deco patterns
- High-lumen versions (5,000 lm)
- Emergency lighting available
- Driver options: On/off (PSU), DALI, Interact Pro (wireless connectivity)


Mounting options



Let's get connected!

The new CoreLine panel range comes with Interact Ready versions that contain integrated wireless sensors. They work seamlessly with Interact, the smart lighting system that's truly easy to install.

How the connected lighting system comes together

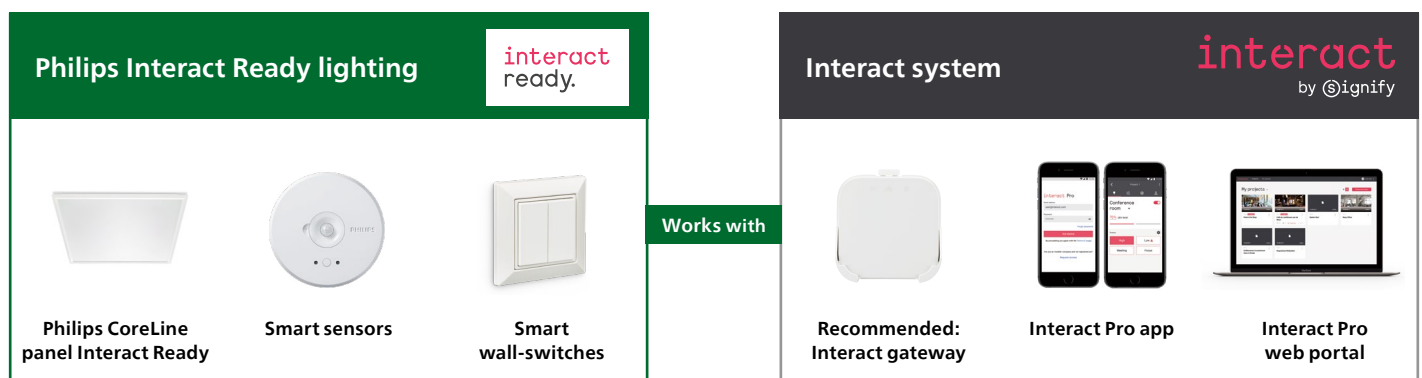

Find out more on philips.com/interact-ready

Philips CoreLine panel All-in: All you need for maximum installation flexibility

CoreLine panels All-in integrate up to 9 codes in a single luminaire by combining 3 color temperatures and 3 lumen outputs. Enjoy unparalleled flexibility on-site at the flip of a switch and the ease-of-use you know you can expect from Philips CoreLine.



No more tough decisions

Reduced risk of picking the wrong luminaire. Just change the settings on location to fit the requirements.



Perfect for maintenance

Pick the right settings on-site while changing luminaires or adjust after installation to your clients' preferences.



Learn more on philips.com/coreline

Ordering information

CoreLine panel



1 Pack

Product type	Power	Lumen output	Efficacy	Color temp.	UGR	CRI	Connector type	Dimmable	Integr. EL	Interact Ready	EOC code
CoreLine panel	W	lm	lm/W	K							
RC132V G6 365/840 PSU W60L60 NOC	26	3,600	138	4000	<23	>80	Green	–	–	–	73509599
RC133V G6 365/840 PSU W62L62 NOC	26	3,600	138	4000	<23	>80	White	–	–	–	73510199
RC132V G6 365/840 PSU W30L120 NOC	26	3,600	138	4000	<23	>80	Green	–	–	–	73511899
RC132V G6 365/840 PSU W60L60 OC	26	3,600	138	4000	<19	>80	Green	–	–	–	73512599
RC133V G6 365/840 PSU W62L62 OC	26	3,600	138	4000	<19	>80	White	–	–	–	73513299
RC132V G6 365/840 PSU W30L120 OC	26	3,600	138	4000	<19	>80	Green	–	–	–	73514999
RC132V G6 365/840 PSD W60L60 OC	26	3,600	138	4000	<19	>80	Green	Yes	–	–	73515699
RC133V G6 365/840 PSD W62L62 OC	26	3,600	138	4000	<19	>80	White	Yes	–	–	73516399
RC132V G6 365/840 PSD W30L120 OC	26	3,600	138	4000	<19	>80	Green	Yes	–	–	73517099
RC132V G6 365/UE840 PSU W60L60 NOC	225	3,600	160	4000	<23	>80	Green	–	–	–	74981899
RC132V G6 365/UE840 PSU W60L60 OC	225	3,600	160	4000	<19	>80	Green	–	–	–	74982599
RC132V G6 365/UE840 PSD W60L60 OC	225	3,600	160	4000	<19	>80	Green	Yes	–	–	74983299
RC132V G6 505/840 PSD W60L60 OC	38	5,000	132	4000	<19	>80	Green	Yes	–	–	74984999
RC132V G6 365/840 PSU W60L60 OC BN	26	3,600	138	4000	<19	>80	Flywire	–	–	–	74987099
RC132V G6 365/840 PSU W60L60 OC BN6	26	3,600	138	4000	<19	>80	Flywire	–	–	–	75015999
RC132V G6 345/830 WIA W60L60 OC	26	3,400	131	3000	<19	>80	Green	Yes	–	Yes	74999399
RC132V G6 365/840 WIA W60L60 OC	26	3,600	138	4000	<19	>80	Green	Yes	–	Yes	75000599
RC132V G6 435/840 WIA W60L60 OC	31	4,300	139	4000	<19	>80	Green	Yes	–	Yes	75002999
RC133V G6 365/840 WIA W62L62 OC	26	3,600	138	4000	<19	>80	White	Yes	–	Yes	75004399
RC132V G6 365/840 WIA W30L120 OC	26	3,600	138	4000	<19	>80	Green	Yes	–	Yes	75006799
RC132V G6 435/840 PSU W60L60 OC BN	31	4,300	139	4000	<19	>80	Flywire	–	–	–	75127999
RC132V G6 435/840 PSU W60L60 NOC BN	31	4,300	139	4000	<23	>80	Flywire	–	–	–	75128699
RC132V G6 505/840 PSU W60L60 OC BN	38	5,000	132	4000	<19	>80	Flywire	–	–	–	75129399

Ordering information

CoreLine panel



1 Pack

Product type	Power	Lumen output	Efficacy	Color temp.	UGR	CRI	Connector type	Dimm-able	Integr. EL	Interact Ready	EOC code
CoreLine panel	W	lm	lm/W	K							
RC132V G6 36S/UE840 WIA W60L60 OC	225	3,600	160	4000	<19	>80	Green	Yes	–	Yes	75130999
RC132V G6 34S/830 PSU W60L60 NOC	26	3,400	131	3000	<23	>80	Green	–	–	–	75133099
RC132V G6 34S/830 PSU W60L60 OC	26	3,400	131	3000	<19	>80	Green	–	–	–	75134799
RC132V G6 43S/840 SIA W60L60 OC IA4	32	4,300	132	4000	<19	>80	Green	Yes	–	Yes	58859200
RC132V G6 40S/830 SIA W60L60 OC IA4	32	4,000	126	3000	<19	>80	Green	Yes	–	Yes	58860800
RC133V G6 36S/840 PSED W62L62 OC	27	3,600	127	4000	<19	>80	Green	Yes	–	–	58861500
RC132V G6 36S/840 PSU W60L60 OC ELB3	31	3,600	110	4000	<19	>80	Green	–	Yes	–	58873800
RC132V G6 36S/840 PSD W60L60 OC ELB3	31	3,600	110	4000	<19	>80	Green	Yes	Yes	–	58874500
RC132V G6 36S/840 PSU W30L120 OC ELB3	31	3,600	110	4000	<19	>80	Green	–	Yes	–	58876900
RC132V G6 36S/840 WIA W60L60 OC ELB3	31	3,600	110	4000	<19	>80	Green	Yes	Yes	Yes	58875200
RC132V G6 50S/840 PSU W60L60 OC BN CL	38	5,000	132	4000	<19	>80	Flywire	–	–	–	75508699

CoreLine panel All-in



Product type	Power	Lumen output (switchable)	Efficacy	Color temp. (switchable)	UGR	CRI	Connector type	Dimm-able	Integr. EL	Interact Ready	EOC code
CoreLine panel All-in	W	lm	lm/W	K							
RC132V G6 29_36_43S/830_40 PSU W60L60 OC	22/26/31	2,900/3,350/4,000 (3000K) 3,100/3,600/4,300 (3500K/4000K)	139	3000/3500/4000	<19	>80	Green	–	–	–	73518799
RC132V G6 29_36_43S/830_40 PSD W60L60 OC					<19	>80	Green	Yes	–	–	73519499
RC132V G6 29_36_43S/830_40 PSDW30L120OC					<19	>80	Green	Yes	–	–	74989499
RC132V G6 29_36_43S/830_40 PSU W60L60NOC					<23	>80	Green	–	–	–	74990099
RC133V G6 29_36_43S/830_40 PSU W62L62 OC					<19	>80	Green	–	–	–	74991799
RC133V G6 29_36_43S/830_40 PSD W62L62 OC					<19	>80	Green	Yes	–	–	74992499
RC132V G6 31_36_43S/940 PSD W60L60 OC	26/31/38	3,100/3,600/4,300	113	4000	<19	>90	Green	Yes	–	–	74995599
RC132V G6 40_43S/830_40 WIA 60x60 OC	31	4,000/4,300	139	3000/3500/4000	<19	>80	Green	Yes	–	Yes	75131699
RC132V G6 40_43S/830_40 WIA 30x120 OC	31	4,000/4,300	139	3000/3500/4000	<19	>80	Green	Yes	–	Yes	75132399
RC132V G6 40_43S/830_40 PSD 30x120 OCWA5	32	4,000/4,300	132	3000/4000	<19	>80	Wago	Yes	–	–	58883700
RC132V G6 40_43S/830_40 WIA 60x60 OC CCE	32	4,000/4,300	132	3000/4000	<19	>80	Schuko	Yes	–	Yes	58885100
RC132V G6 40_43S/830_40 WIA 60x60 OC WA3	32	4,000/4,300	132	3000/4000	<19	>80	Wago	Yes	–	Yes	58886800
RC132V G6 40_43S/830_40 WIA 30x120 OCWA3	32	4,000/4,300	132	3000/4000	<19	>80	Wago	Yes	–	Yes	58887500
RC132V G6 31_36_43S/840 PSU W60L60OCUKI	22/26/31	3,100/3,600/4,300	139	4000	<19	>80	White	–	–	–	75508699

© 2024 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.



Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

All technical information can be found at www.philips.com/coreline