

SAGA- SOCKETS FOR SURFACE PRODUCTS

PEP ecopassport®

Product Environmental Profile



Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

| | | | | | |
|---|----------------|----------------------------|------|-------|------|
| ORGANIZATION | | CONTACT INFORMATION | | | |
| ABB Oy, Wiring Accessories | | ella.helynranta@fi.abb.com | | | |
| ADDRESS | | WEBSITE | | | |
| Porvoon Sisäkehä 2, 06100 Porvoo, Finland | | www.new.abb.com | | | |
| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 1/11 |



ABB Purpose & Embedding Sustainability

ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.

Scan or click the QR code for more information on the topic




General Information

| | |
|----------------------------|---|
| Reference product | 2TKA00005218/402EA-916 The content of this PEP cannot be compared with content based on another program. |
| Description of the product | The PRODUCT "SAGA - DCL Outlet" is a lighting socket wall outlet. |
| Functional unit | Socket to connect to the power supply of a load consuming 16A under a voltage of 250V while protecting the user from direct contact with live parts, with a protection class IP21, in the Household/Commercial application areas for a reference life for 20 years. |
| Other products covered | The other products covered by the PEP are listed on page 9. |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 2/11 |



Constituent Materials

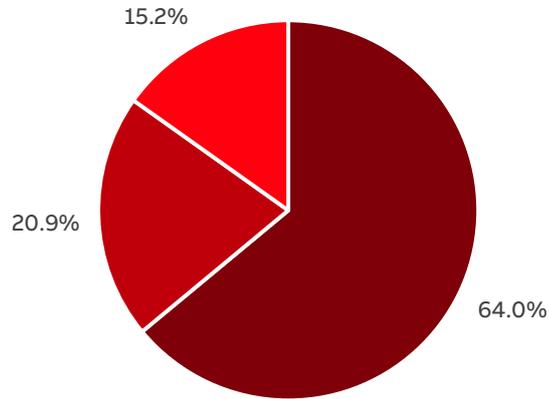

■ Plastics 65.46 g ■ Metals 21.33 g ■ Others 15.52 g

Total weight of Reference product

102.31

g

| Plastics as % of weight | | Metals as % of weight | | Others as % of weight | |
|----------------------------|---------|-----------------------|---------|-----------------------|---------|
| Name and CAS number | Weight% | Name and CAS number | Weight% | Name and CAS number | Weight% |
| Bio-circular Polycarbonate | 47.9 | Brass | 18.2 | Outer carton box | 7.3 |
| Polycarbonate | 5.5 | Stainless Steel | 2.7 | Macro carton box | 4.5 |
| Polyamide 66 | 10.5 | – | – | Plastic bag | 3.3 |

The analysed product is in conformity with the provisions of Low Voltage Directive 2014/35/EU, RoHS directive 2011/65/EU, covering 2015/863(EU), REACH regulation No 1907/2006, and national legislation. Plastics used for the reference product are halogen-free materials (IEC/61249-2-21) and they are also recyclable.

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 3/11 |



Additional Environmental Information

| | |
|--|---|
| Manufacturing | Includes the environmental impacts associated with extraction and processing of the raw materials used to produce the product and its packaging, transport to the manufacturing site and assembly; as well as the generated wastes during the manufacturing process. |
| Distribution | Includes the transportation of the packaged product from the manufacturer's last logistic platform to the distributor and then to end users. |
| Installation | Includes the manual installation of the products and the end-of-life of packaging. |
| Use | Energy consumption is calculated by following the use scenario of the corresponding PSR for the family product Socket. The Sub-family is Power socket and the application area is household/commercial. Thus, this use scenario take into account the loss of energy at a 10% of the load rate with a use time rate of 30% during 20 years. |
| End of life | Includes the transportation of the product to the final end-of-life treatment site and treatment processes. A value of 100 km transport by lorry is used for the transportation. |
| Benefits and loads beyond the system boundaries | Prevented impacts of recycling materials. |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 4/11 |



Environmental Impacts


| | |
|----------------------------------|---|
| Reference lifetime | 20 years |
| Product category | Socket (Power Socket) |
| Installation elements | End-of-life of the packaging components |
| Use scenario | Europe |
| Geographical representativeness | Global |
| Technological representativeness | Materials and processes data are specific for the production of one SAGA-SOCKETS FOR SURFACE PRODUCTS |
| Software and database used | Simapro 9.5.0.1 and Ecoinvent 3.9 |

Energy model used

| | |
|---------------|---|
| Manufacturing | Finland energy mix at high voltage obtained from IEA data |
| Installation | Non-applicable |
| Use | Customers' electricity mix at low voltage (Finland, Sweden and Iceland) |
| End of life | Recycling of product and packaging |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 5/11 |

Common base of mandatory indicators

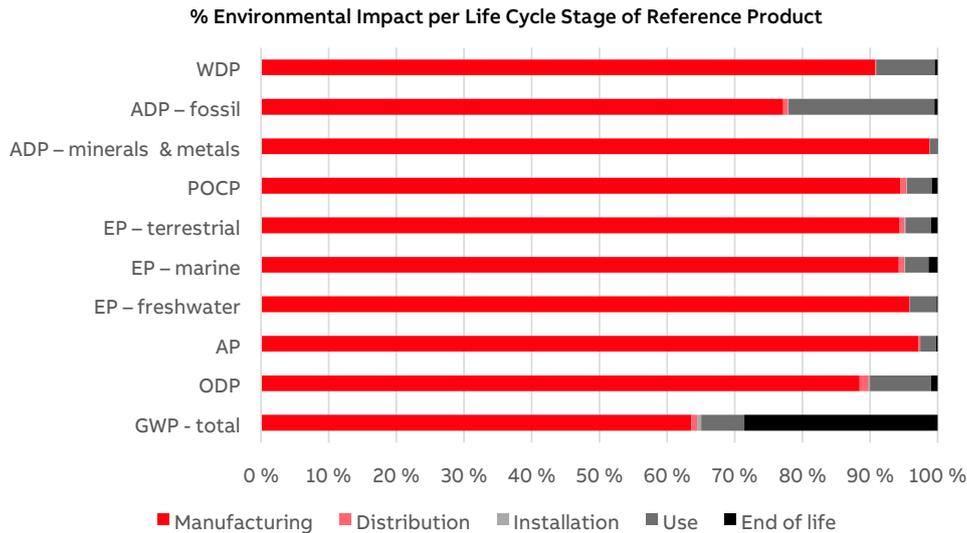

Environmental impact indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Benefits |
|---|--------------------------|----------|--------------------|-------------------|--------------|----------|----------------|-----------|
| GWP-total | kg CO ₂ eq. | 6.99E-01 | 4.45E-01 | 6.02E-03 | 4.01E-03 | 4.46E-02 | 2.00E-01 | -2.98E-01 |
| GWP-fossil | kg CO ₂ eq. | 6.91E-01 | 5.88E-01 | 6.01E-03 | 4.01E-03 | 4.27E-02 | 4.99E-02 | -2.97E-01 |
| GWP-biogenic | kg CO ₂ eq. | 6.35E-03 | -1.44E-01 | 1.87E-06 | 6.40E-07 | 3.44E-04 | 1.50E-01 | -4.49E-04 |
| GWP-luluc | kg CO ₂ eq. | 2.28E-03 | 6.99E-04 | 3.03E-06 | 2.33E-07 | 1.57E-03 | 3.08E-06 | -2.26E-04 |
| GWP-fossil = Global Warming Potential fossil fuels GWP-biogenic = Global Warming Potential biogenic GWP-luluc = Global Warming Potential land use and land use change | | | | | | | | |
| ODP | kg CFC-11 eq. | 9.45E-09 | 8.36E-09 | 6.01E-03 | 4.01E-03 | 4.27E-02 | 4.99E-02 | -2.97E-01 |
| ODP = Depletion potential of the stratospheric ozone layer | | | | | | | | |
| AP | H+ eq. | 1.18E-02 | 1.15E-02 | 2.97E-05 | 2.60E-06 | 2.72E-04 | 3.14E-05 | -3.00E-03 |
| AP = Acidification potential, Accumulated Exceedance | | | | | | | | |
| EP-freshwater | kg P eq. | 5.49E-05 | 5.26E-05 | 4.65E-08 | 4.91E-09 | 2.18E-06 | 9.41E-08 | -1.61E-05 |
| EP-marine | kg N eq. | 1.10E-03 | 1.04E-03 | 9.08E-06 | 1.16E-06 | 3.85E-05 | 1.48E-05 | -3.22E-04 |
| EP-terrestrial | mol N eq. | 1.28E-02 | 1.21E-02 | 9.81E-05 | 1.12E-05 | 4.85E-04 | 1.30E-04 | -3.64E-03 |
| EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment EP-terrestrial = Eutrophication potential, Accumulated Exceedance | | | | | | | | |
| POCP | kg NMVOC eq. | 3.89E-03 | 3.67E-03 | 3.59E-05 | 3.57E-06 | 1.42E-04 | 3.38E-05 | -1.41E-03 |
| POCP = Formation potential of tropospheric ozone | | | | | | | | |
| ADP-minerals & metals | kg Sb eq. | 1.33E-04 | 1.31E-04 | 1.84E-08 | 1.45E-09 | 1.52E-06 | 2.72E-08 | -2.62E-05 |
| ADP-fossil | MJ | 1.17E+01 | 9.01E+00 | 8.45E-02 | 6.27E-03 | 2.52E+00 | 5.52E-02 | -5.70E+00 |
| ADP-minerals & metals = Abiotic depletion potential for non-fossil resources ADP-fossil = Abiotic depletion for fossil resources potential | | | | | | | | |
| WDP | m ³ eq. depr. | 3.61E-01 | 3.28E-01 | 3.36E-04 | 2.06E-04 | 3.13E-02 | 1.58E-03 | -1.82E-01 |
| WDP = Water Deprivation potential | | | | | | | | |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 6/11 |

Common base of mandatory indicators

Inventory flows indicator – Resource use indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|-----------|------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| PERE | MJ | 1.80E+00 | 8.09E-01 | 1.27E-03 | 1.38E-04 | 9.86E-01 | 4.05E-03 | -4.64E-01 |
| PERM | MJ | 1.38E-01 | 1.38E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| PERT | MJ | 1.94E+00 | 9.47E-01 | 1.27E-03 | 1.38E-04 | 9.86E-01 | 4.05E-03 | -4.64E-01 |
| PENRE | MJ | 6.80E+00 | 4.14E+00 | 8.45E-02 | 6.28E-03 | 2.51E+00 | 5.52E-02 | -5.69E+00 |
| PENRM | MJ | 2.54E+00 | 2.54E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| PENRT | MJ | 9.34E+00 | 6.68E+00 | 8.45E-02 | 6.28E-03 | 2.51E+00 | 5.52E-02 | -5.69E+00 |

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials
 PERM = Use of renewable primary energy resources used as raw materials
 PERT = Total Use of renewable primary energy resources
 PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials
 PENRM = Use of non-renewable primary energy resources used as raw materials
 PENRT = Total Use of non-renewable primary energy resources

Inventory flows indicator – Indicators describing the use of secondary materials, water, and energy resources

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|-----------|----------------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| SM | kg | 7.21E-03 | 7.21E-03 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| RSF | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| NRSF | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| FW | m ³ | 1.12E-02 | 8.57E-03 | 1.17E-05 | 7.15E-06 | 2.51E-03 | 5.96E-05 | -4.70E-03 |

SM = Use of secondary material
 RSF = Use of renewable secondary fuels
 NRSF = Use of non-renewable secondary fuels
 FW = Use of net fresh water

Inventory flows indicator – Waste category indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|-------------------------------|------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| Hazardous waste disposed | kg | 8.22E-05 | 7.96E-05 | 5.31E-07 | 3.85E-08 | 1.56E-06 | 4.53E-07 | -1.97E-05 |
| Non- hazardous waste disposed | kg | 1.56E-01 | 1.21E-01 | 3.91E-03 | 2.58E-03 | 9.71E-03 | 1.88E-02 | -3.10E-02 |
| Radioactive waste disposed | kg | 4.72E-05 | 1.36E-05 | 2.64E-08 | 2.57E-09 | 3.35E-05 | 3.07E-08 | -5.78E-06 |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 7/11 |

Common base of mandatory indicators

Inventory flows indicator – Output flow indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|----------------------------------|------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| Components for re- use | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for recycling | kg | 9.69E-02 | 0.00E+00 | 0.00E+00 | 1.34E-02 | 0.00E+00 | 8.35E-02 | 0.00E+00 |
| Materials for energy recovery | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Exported energy | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |

Inventory flow indicator – other indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|--|------------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| Biogenic carbon content of the product | kg of C | 4.09E-02 | 4.09E-02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Biogenic carbon content of the associated packaging | kg of C | 7.14E-03 | 7.14E-03 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 8/11 |

Extrapolation Factors

For other products than the Reference product covered by this PEP, the environmental impacts for each phase of the lifecycle are obtained by multiplying the values of the Reference product by the following coefficients:

* if the coefficient is "1", the impacts of the phase of the life cycle are assimilated to the Reference product, meaning that the impacts are unchanged in comparison to the Reference product

| Product name | Manu- facturing | Distri- bution | Installation | Use | End of life | Benefits |
|--------------|--------------------|-------------------|--------------|------|-------------|----------|
| 2TKA00005218 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 2TKA00005212 | 0.85 | 0.85 | 0.77 | 1.00 | 0.87 | 0.87 |
| 2TKA00005214 | 1.36 | 1.36 | 1.20 | 1.00 | 1.38 | 1.38 |
| 2TKA00005219 | 1.68 | 1.68 | 0.77 | 2.03 | 1.85 | 1.85 |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 9/11 |

Environmental Impact Indicator Glossary

Impact indicators

| Indicator | Description | Distribution |
|--|---|--------------------------------------|
| Global warming potential (GWP) - total | Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential (GWP-total) is the sum of three sub-categories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change | kg CO ₂ eq. |
| Ozone depletion (ODP) | Emissions to air that contribute to the destruction of the stratospheric ozone layer | kg CFC-11 eq. |
| Acidification of soil and water (A) | Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides | H+ eq. |
| Eutrophication (E) | Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial. | kg P eq., kg N eq., mole N eq. |
| Photochemical ozone creation (POCP) | Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun. | kg NMVOC eq. |
| Depletion of abiotic resources – elements (ADPe) | Indicator of the depletion of natural non-fossil resources | kg Sb eq. |
| Depletion of abiotic resources – fossil fuels (ADPf) | The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste) | MJ (lower heating value) |
| Water Deprivation potential (WDP) | Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived. | m ³ eq. depr. |

Resource use indicators

| Indicator | Description | Distribution |
|-----------------------------|--|--------------------------|
| Total use of primary energy | Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy re-sources (primary energy and primary energy resources used as raw materials) | MJ (lower heating value) |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|-------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 10/11 |

| | |
|--|---|
| Registration number: ABBG-00550-V01.01-EN | Drafting Rules: PCR-ed4-EN-2021 09 06 |
| | Supplemented by: PSR-0005-ed3-EN—2023 06 06 |
| Verifier accreditation number: VH08 | Information and reference documents: www.pep-ecopassport.org |
| Date of issue: February 2024 | Validity period: 5 years |
| Independent verification of the declaration and data, in compliance with ISO 14025: 2006 | |
| Internal: <input type="radio"/> | External: <input checked="" type="radio"/> |
| Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations" |  |
| PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019 The elements of the present PEP cannot be compared with elements from any other program. | |
| Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations" | |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|-------|
| Approved | Public | ABBG-00550-V01.01-EN | 1 | en | 11/11 |