

SAGA - DCL OUTLET

# PEP ecopassport®

## Product Environmental Profile



Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

ORGANIZATION		CONTACT INFORMATION			
ABB Oy, Wiring Accessories		ella.helynranta@fi.abb.com			
ADDRESS		WEBSITE			
Porvoon Sisäkehä 2, 06100 Porvoo, Finland		www.new.abb.com			
STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	1/10



# ABB Purpose & Embedding Sustainability

ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.

Scan QR code for more information:




## General Information

Reference product	2TKA00005234/AKK6-916  The content of this PEP cannot be compared with content based on another program.
Description of the product	The PRODUCT "SAGA - DCL Outlet" is a lighting socket wall outlet.
Functional unit	Socket to connect to the power supply of a load consuming 6A under a voltage of 250V while protecting the user from direct contact with live parts, with a protection class IP20, in the Household/Commercial application areas for a reference life for 20 years.
Other products covered	No other product is included in this PEP.

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	2/10



# Constituent Materials

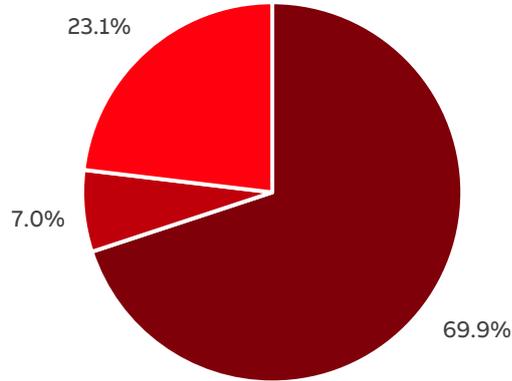

■ Plastics 27.63 g ■ Metals 2.75 g ■ Others 9.13 g

**Total weight of Reference product**

39.5

g

Plastics as % of weight		Metals as % of weight		Others as % of weight	
Name and CAS number	Weight%	Name and CAS number	Weight%	Name and CAS number	Weight%
Biobased Polycarbonate	26.0	Brass	5.4	–	–
Polycarbonate	26.8	Stainless Steel	1.6	Inner carton box	13.3
Polyamide 66	17.2	–	x	Outer carton box	7.5
–	x	–	x	Plastic bag	2.3

The analysed product is in conformity with the provisions of Low Voltage Directive 2014/35/EU, RoHS directive 2011/65/EU, covering 2015/863(EU), REACH regulation No 1907/2006, and national legislation. Plastics used for the reference product are halogen-free materials (IEC/61249-2-21) and they are also recyclable.

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN		1 en	3/10



## Additional Environmental Information

<b>Manufacturing</b>	Includes the environmental impacts associated with extraction and processing of the raw materials used to produce the product and its packaging, transport to the manufacturing site and assembly; as well as the generated wastes during the manufacturing process.
<b>Distribution</b>	Includes the transportation of the packaged product from the manufacturer's last logistic platform to the distributor and then to end users.
<b>Installation</b>	Includes the manual installation of the products and the end-of-life of packaging.
<b>Use</b>	Energy consumption is calculated by following the use scenario of the corresponding PSR for the family product Socket. The Sub-family is Power socket and the application area is household/commercial. Thus, this use scenario take into account the loss of energy at a 10% of the load rate with a use time rate of 30% during 20 years.
<b>End of life</b>	Includes the transportation of the product to the final end-of-life treatment site and treatment processes. A value of 100 km transport by lorry is used for the transportation.
<b>Benefits and loads beyond the system boundaries</b>	Prevented impacts of recycling materials.

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	4/10



# Environmental Impacts


Reference lifetime	20 years
Product category	Socket (Power Socket)
Installation elements	End-of-life of the packaging components
Use scenario	Europe
Geographical representativeness	Global
Technological representativeness	Materials and processes data are specific for the production of one SAGA-DCL Outlet
Software and database used	Simapro 9.5.0.1 and Ecoinvent 3.9

## Energy model used

Manufacturing	Czech Republic energy mix at high voltage obtained from IEA data
Installation	Non-applicable
Use	Customers' electricity mix at low voltage (Finland, Sweden, Hungary and Norway)
End of life	Recycling of product and packaging

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	5/10

## Common base of mandatory indicators

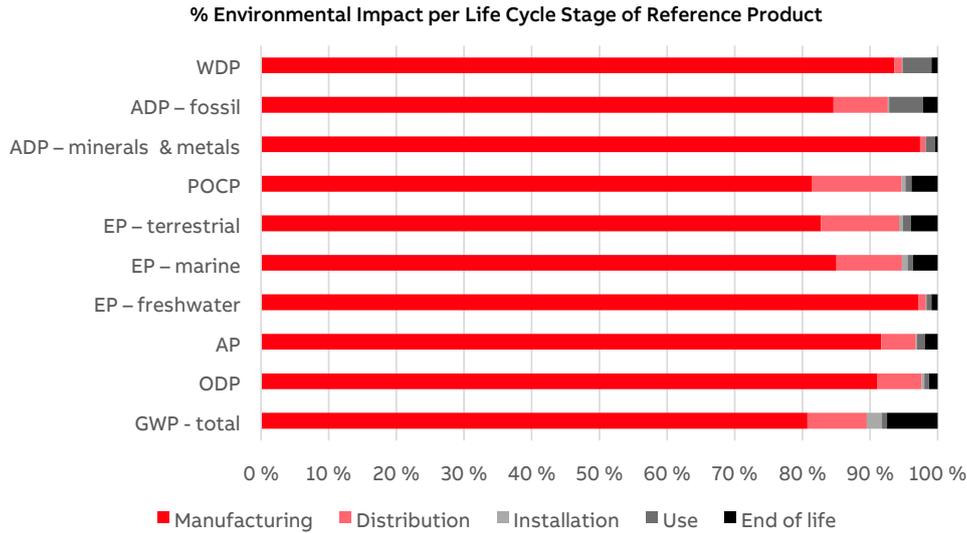

### Environmental impact indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Benefits
<b>GWP-total</b>	kg CO <sub>2</sub> eq.	5.90E-01	4.76E-01	5.19E-02	1.31E-02	4.50E-03	4.42E-02	-2.41E-01
<b>GWP-fossil</b>	kg CO <sub>2</sub> eq.	5.69E-01	4.64E-01	5.18E-02	8.62E-03	4.14E-03	4.10E-02	-2.41E-01
<b>GWP-biogenic</b>	kg CO <sub>2</sub> eq.	2.00E-02	1.22E-02	4.66E-05	4.52E-03	1.09E-04	3.15E-03	1.11E-03
<b>GWP-luluc</b>	kg CO <sub>2</sub> eq.	7.40E-04	4.55E-04	2.52E-05	6.81E-07	2.45E-04	1.36E-05	-2.70E-04
GWP-fossil = Global Warming Potential fossil fuels GWP-biogenic = Global Warming Potential biogenic GWP-luluc = Global Warming Potential land use and land use change								
<b>ODP</b>	kg CFC-11 eq.	1.71E-08	1.55E-08	5.18E-02	8.62E-03	4.14E-03	4.10E-02	-2.41E-01
ODP = Depletion potential of the stratospheric ozone layer								
<b>AP</b>	H+ eq.	3.41E-03	3.12E-03	1.74E-04	7.30E-06	3.79E-05	6.56E-05	-2.42E-03
AP = Acidification potential, Accumulated Exceedance								
<b>EP-freshwater</b>	kg P eq.	3.56E-05	3.45E-05	4.14E-07	2.10E-08	2.71E-07	3.26E-07	-1.49E-05
<b>EP-marine</b>	kg N eq.	6.03E-04	5.13E-04	5.86E-05	4.88E-06	5.10E-06	2.18E-05	-3.22E-04
<b>EP-terrestrial</b>	mol N eq.	5.43E-03	4.49E-03	6.26E-04	2.96E-05	6.56E-05	2.15E-04	-2.92E-03
EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment EP-terrestrial = Eutrophication potential, Accumulated Exceedance								
<b>POCP</b>	kg NMVOC eq.	1.93E-03	1.58E-03	2.55E-04	1.07E-05	1.75E-05	7.47E-05	-1.07E-03
POCP = Formation potential of tropospheric ozone								
<b>ADP-minerals &amp; metals</b>	kg Sb eq.	2.05E-05	2.00E-05	1.66E-07	5.47E-09	2.90E-07	7.63E-08	-2.11E-05
<b>ADP-fossil</b>	MJ	9.14E+00	7.73E+00	7.34E-01	1.56E-02	4.57E-01	2.01E-01	-4.52E+00
ADP-minerals & metals = Abiotic depletion potential for non-fossil resources ADP-fossil = Abiotic depletion for fossil resources potential								
<b>WDP</b>	m <sup>3</sup> eq. depr.	9.20E-03	8.61E-03	1.04E-04	8.19E-06	3.94E-04	8.44E-05	-4.75E-03
WDP = Water Deprivation potential								

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	6/10

## Common base of mandatory indicators

### Inventory flows indicator – Resource use indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
PERE	MJ	2.38E-01	2.04E-02	1.14E-02	6.74E-04	1.95E-01	1.06E-02	-2.80E-01
PERM	MJ	4.26E-01	4.26E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	6.65E-01	4.47E-01	1.14E-02	6.74E-04	1.95E-01	1.06E-02	-2.80E-01
PENRE	MJ	7.74E+00	6.33E+00	7.34E-01	1.56E-02	4.56E-01	2.01E-01	-4.52E+00
PENRM	MJ	1.40E+00	1.40E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	9.14E+00	7.73E+00	7.34E-01	1.56E-02	4.56E-01	2.01E-01	-4.52E+00

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials  
 PERM = Use of renewable primary energy resources used as raw materials  
 PERT = Total Use of renewable primary energy resources  
 PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials  
 PENRM = Use of non-renewable primary energy resources used as raw materials  
 PENRT = Total Use of non-renewable primary energy resources

### Inventory flows indicator – Indicators describing the use of secondary materials, water, and energy resources

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m <sup>3</sup>	9.20E-03	8.61E-03	1.04E-04	8.19E-06	3.94E-04	8.44E-05	-4.75E-03

SM = Use of secondary material  
 RSF = Use of renewable secondary fuels  
 NRSF = Use of non-renewable secondary fuels  
 FW = Use of net fresh water

### Inventory flows indicator – Waste category indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Hazardous waste disposed	kg	4.92E-04	4.86E-04	4.67E-06	8.92E-08	2.00E-07	8.93E-07	-1.54E-05
Non- hazardous waste disposed	kg	1.13E-01	5.07E-02	3.58E-02	2.93E-03	1.76E-03	2.22E-02	-2.32E-02
Radioactive waste disposed	kg	2.15E-05	1.43E-05	2.38E-07	1.47E-08	6.77E-06	1.63E-07	-4.07E-06

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	7/10

## Common base of mandatory indicators

### Inventory flows indicator – Output flow indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	5.19E-02	0.00E+00	0.00E+00	1.20E-02	0.00E+00	3.99E-02	0.00E+00
Materials for energy recovery	kg	5.89E-03	0.00E+00	0.00E+00	1.95E-03	0.00E+00	3.94E-03	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

### Inventory flow indicator – other indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Biogenic carbon content of the product	kg of C	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Biogenic carbon content of the associated packaging	kg of C	6.61E-03	6.61E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	8/10

## Environmental Impact Indicator Glossary

### Impact indicators

Indicator	Description	Distribution
Global warming potential (GWP) - total	Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential (GWP-total) is the sum of three sub-categories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change	kg CO <sub>2</sub> eq.
Ozone depletion (ODP)	Emissions to air that contribute to the destruction of the stratospheric ozone layer	kg CFC-11 eq.
Acidification of soil and water (A)	Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides	H+ eq.
Eutrophication (E)	Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial.	kg P eq., kg N eq., mole N eq.
Photochemical ozone creation (POCP)	Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun.	kg NMVOC eq.
Depletion of abiotic resources – elements (ADPe)	Indicator of the depletion of natural non-fossil resources	kg Sb eq.
Depletion of abiotic resources – fossil fuels (ADPf)	The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste)	MJ (lower heating value)
Water Deprivation potential (WDP)	Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived.	m <sup>3</sup> eq. depr.

### Resource use indicators

Indicator	Description	Distribution
Total use of primary energy	Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy re-sources (primary energy and primary energy resources used as raw materials)	MJ (lower heating value)

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	9/10

Registration number: <b>ABBG-00525-V01.01-EN</b>	Drafting Rules: <b>PCR-ed4-EN-2021 09 06</b>
	<b>Supplemented by: PSR-0005-ed3-EN—2023 06 06</b>
Verifier accreditation number: <b>VH08</b>	Information and reference documents: <b>www.pep-ecopassport.org</b>
Date of issue: <b>January 2024</b>	Validity period: <b>5 years</b>
<b>Independent verification of the declaration and data, in compliance with ISO 14025: 2006</b>	
<b>Internal:</b> <input type="radio"/>	<b>External:</b> <input checked="" type="radio"/>
Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"	
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019 The elements of the present PEP cannot be compared with elements from any other program.	
Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"	

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00525-V01.01-EN	1	en	10/10