


MOON SLIM



Our popular Moon Slim is available in several sizes with various features and types of dimming. Moon Slim is a low-build LED plafond in slim design with a pleasant uplight that evens out contrasts on the ceiling or wall. Selectable colour temperature via DIP-Switch ColourTemp directly in the luminaire. Easily installed IP44 luminaire with a long life time and lumen output. Comes complete with integrated dimmable driver or control via microwave sensor in two variants where SC has corridor function, PIR, DALI or Bluetooth with app control. Also available with emergency lighting operation. Well-planned design enabling replacement of both LED and driver. Screw holes that fit over a ceiling box, two openings at the bottom, one of which is centred. Cable bushings for surface-mounted cable routing from two sides.


- Thin plafond with pleasant uplight – for many areas of application
- Sizes for every occasion: 255, 320 and 380
- Replaceable LED module and driver – built for the future
- Available as emergency lighting – emergency lighting module can also be fitted on existing luminaire as an accessory
- Base and cover made of recycled plastic

**MOON SLIM
-POPULAR SLIM
CEILING LAMP
– NOW IN SEVERAL
VERSIONS**

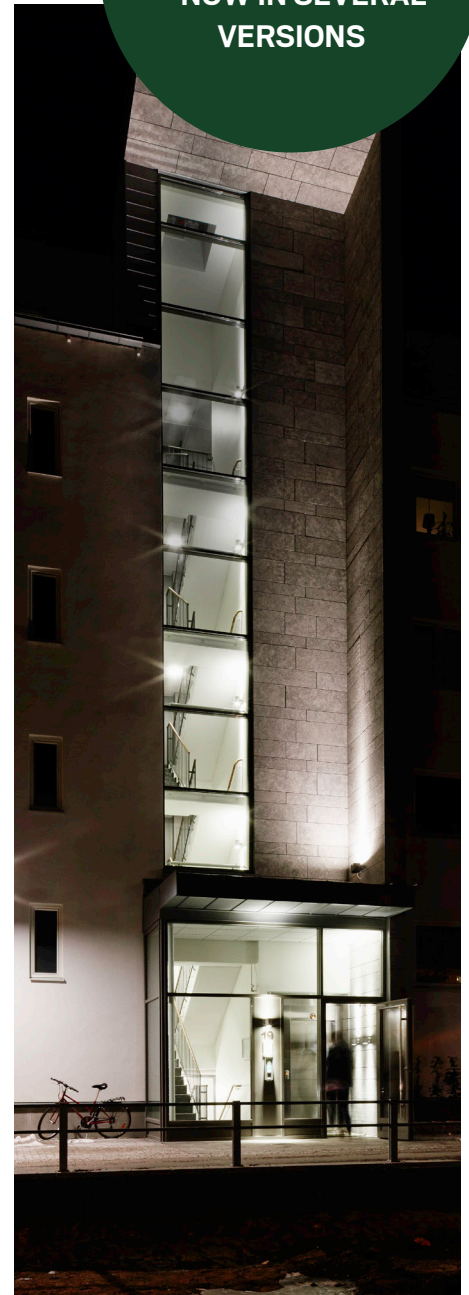


MOON SLIM

GTIN	Type	Colour Temperature	Luminaire Lumen	Power Luminaire	Diameter
7392971141244 ²⁾	255 FDIM	3000K/4000K	1150lm/1180lm	12W	Ø255
7392971141251 ²⁾	320 FDIM	3000K/4000K	1650lm/1700lm	17W	Ø320
7392971145303 ²⁾	380 FDIM	3000K/4000K	2200lm/2300lm	22W	Ø380
7392971142081 ^{1,8)}	255 PIR	3000K/4000K	1150lm/1180lm	12,5W	Ø255
7392971142098 ^{1,8)}	320 PIR	3000K/4000K	1650lm/1700lm	17,5W	Ø320
7392971141268 ^{1,3)}	255 Sensor	3000K/4000K	1150lm/1180lm	13W	Ø255
7392971141275 ^{1,3)}	320 Sensor	3000K/4000K	1650lm/1700lm	18W	Ø320
7392971145310 ^{1,3)}	380 Sensor	3000K/4000K	2200lm/2300lm	22W	Ø380
7392971145327 ^{1,3)}	320 SC	3000K/4000K	1700lm/1750lm	18W	Ø320
7392971145334 ^{1,3)}	380 SC	3000K/4000K	2200lm/2300lm	23W	Ø380
7392971145341 ^{3,4,6)}	320 BLE	3000K/4000K	1700lm/1750lm	18W	Ø320
7392971145358 ^{3,4,6)}	380 BLE	3000K/4000K	2200lm/2300lm	23W	Ø380
7392971145365 ^{4,5)}	320 DALI	3000K/4000K	1700lm/1750lm	17W	Ø320
7392971145372 ^{4,5)}	380 DALI	3000K/4000K	2200lm/2300lm	22W	Ø380
7392971145556 ^{2,7)}	380 FDIM EM	3000K/4000K	2200lm/2300lm	25W	Ø380
7392971145563 ^{1,3,7)}	380 S EM	3000K/4000K	2200lm/2300lm	25W	Ø380
7392971145570 ^{1,3,7)}	320 SC EM	3000K/4000K	1700lm/1750lm	21W	Ø320
7392971145587 ^{1,3,7)}	380 SC EM	3000K/4000K	2200lm/2300lm	26W	Ø380
7392971145594 ^{3,4,6,7)}	320 BLE EM	3000K/4000K	1700lm/1750lm	21W	Ø320
7392971145600 ^{3,4,6,7)}	380 BLE EM	3000K/4000K	2200lm/2300lm	26W	Ø380
7392971145617 ^{4,5,7)}	320 DALI EM	3000K/4000K	1700lm/1750lm	20W	Ø320
7392971145624 ^{4,5,7)}	380 DALI EM	3000K/4000K	2200lm/2300lm	25W	Ø380



320



380



EMERGENCY LIGHTING MODULE MOON SLIM

Emergency lighting module suitable for Moon Slim. Installed using the accompanying screws. The luminaires can be finished with emergency lighting modules afterwards and will retain their normal capacity and control function. Should be put into use within 6 months to retain function, (spare battery available as an accessory). The emergency lighting module is equipped with automatic self-testing and indicates status via green or red LED. Provides light for 1.5 hours with power failure.



GTIN	Type
7392971145631	Emergency lighting module Moon Slim
7392971145648	Emergency lighting battery Moon Slim Li-Ion



Articles that can be fitted with the emergency lighting module	
Moon Slim 380	7392971145303
Moon Slim S 380	7392971145310
Moon Slim SC 320	7392971145327
Moon Slim SC 380	7392971145334
Moon Slim Bluetooth 320	7392971145341
Moon Slim Bluetooth 380	7392971145358
Moon Slim DALI 320	7392971145365
Moon Slim DALI 380	7392971145372