



SX-ARC1 ARC FAULT DETECTION DEVICE

PEP ecopassport®
Product Environmental Profile



Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

ORGANIZATION		CONTACT INFORMATION			
ABB S.p.A.		Cesare Fogli – cesare.fogli@it.abb.com			
ADDRESS		WEBSITE			
ABB S.p.A. – ELSB Viale dell'Industria, 18 20009 Vittuone (MI) -Italy		new.abb.com/it			
STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	1/14



ABB Purpose & Embedding Sustainability

ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.




General Information

Reference product	SX-ARC1 B16 6kA 1P+N - 2CSA255908R9165
Description of the product	The SX-ARC1 B16- 2CSA255908R9165 is an AFDD compliant to the product standard "IEC 62606 - General requirements for Arc Fault Detection Devices" intended to mitigate the effects of arcing faults by disconnecting the circuit when an arc fault is detected. Integrated with an MCB in 6kA and 10kA breaking capacity, S-ARC1 and S-ARC1 M offer protection against overcurrents and arc faults in only two modules width.
Functional unit	The functional unit is Circuit Breaker designed to protect for 20 years the installation against arc faults, overvoltage (higher than 275V), overloads and short-circuits with assigned voltage 230 V, and rated current 16 A. This protection is ensured in accordance with the following parameters: - Number of poles: 1P+N - Rated breaking capacity I_{cn}: 6kA - Tripping curve type B
Other products covered	SX-ARC1 & S-ARC1 M homogeneous family: Beaking capacity 6kA or 10kA 1+N Poles with 230V rated voltage B & C char from 6 up to 40 A Sensitivity of 30mA type A & AC

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN		1 EN	2/14



Constituent Materials

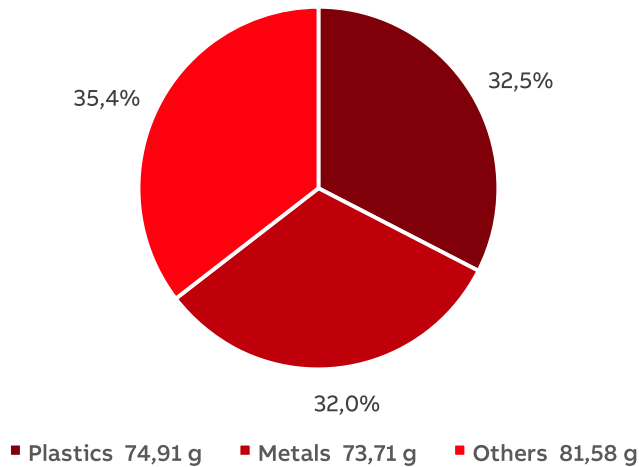

Total weight of Reference product	230,2	g
-----------------------------------	-------	---

Plastics as % of weight		Metals as % of weight		Others as % of weight	
Name and CAS number	Weight%	Name and CAS number	Weight%	Name and CAS number	Weight%
PA	22,2	STEEL	19,9	WOOD	18,1
GF	8,0	COPPER	7,7	CARDBOARD	5,2
PPS	1,0	BRASS	3,0	PAPER	2,6
PC	1,0	ALUMINIUM	0,9	PCB	9,4
PE	0,3	OTHER METALS	0,6	Other	0,2

Total weight of the reference product is 170,6 and its packaging is 59,6g

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	3/14



Additional Environmental Information

Manufacturing	Includes the environmental impacts associated with extraction and processing of the raw materials used to produce and assembly the product and its packaging, distribution to the manufacturer's last logistic platform.
Distribution	Includes the transportation in its packaging from the manufacturer's last logistic platform to the distributor.
Installation	Installation stage includes the installation of the products made manually and waste treatment of discarded materials.
Use	Energy consumption is calculated by following the PSR. The energy models used in this phase are the specific energy mixes based on ABB distribution. No maintenance is necessary.
End of life	Includes its removal, dismantling and transportation of the dismantled product to the treatment site and the treatment process. A value of 1000 km transport by lorry is used for the transportation.
Benefits and loads beyond the system boundaries	N/A

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	4/14



Environmental Impacts


Reference lifetime	20 years
Product category	Circuit Breaker
Installation elements	Installation carried out manually. End of life of packaging.
Use scenario	Load time: 50% of rated current in continuous operation (In). Use time rate: 30% of reference lifetime (RLT).
Geographical representativeness	Europe
Technological representativeness	Materials and processes data are specific for the production of SX-ARC1 B16 6kA 1P+N - 2CSA255908R9165 and its family
Software and database used	Simapro 9.4.0.2 and Ecoinvent v3.8

Energy model used

Manufacturing	Electricity, medium voltage {IT} market for Cut-off, System_GO energy mix_ei 3.8 System
Installation	Manually done. Europe
Use	Electricity, low voltage {RER} market group for Cut-off, S
End of life	The energy-related processes used for the inputs of the end-of-life stage are those included in the ecoinvent datasets selected for the analysis

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	5/14

Common base of mandatory indicators

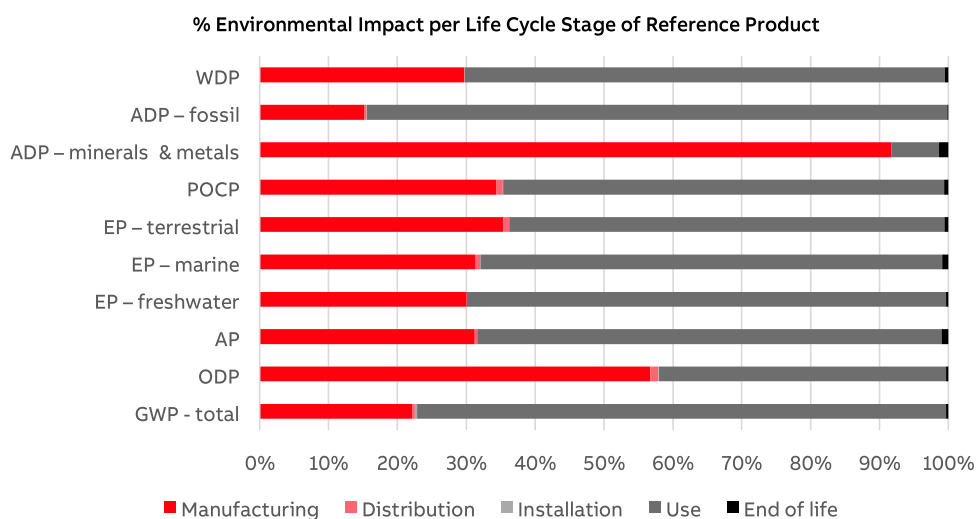

Environmental impact indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
GWP-total	kg CO ₂ eq.	3,62E+01	8,00E+00	1,58E-01	1,20E-01	2,78E+01	1,25E-01	NA
GWP-fossil	kg CO ₂ eq.	3,52E+01	7,99E+00	1,58E-01	1,25E-02	2,69E+01	1,21E-01	NA
GWP-biogenic	kg CO ₂ eq.	9,72E-01	-6,59E-03	1,46E-04	1,08E-01	8,67E-01	3,56E-03	NA
GWP-luluc	kg CO ₂ eq.	7,68E-02	1,31E-02	6,17E-05	5,06E-06	6,35E-02	1,01E-04	NA
GWP-fossil = Global Warming Potential fossil fuels GWP-biogenic = Global Warming Potential biogenic GWP-luluc = Global Warming Potential land use and land use change								
ODP	kg CFC-11 eq.	3,26E-06	1,85E-06	1,58E-01	1,25E-02	2,69E+01	1,21E-01	NA
ODP = Depletion potential of the stratospheric ozone layer								
AP	H ⁺ eq.	2,27E-01	7,09E-02	8,01E-04	6,47E-05	1,53E-01	2,32E-03	NA
AP = Acidification potential, Accumulated Exceedance								
EP-freshwater	kg P eq.	3,89E-02	1,17E-02	1,02E-05	1,13E-06	2,71E-02	1,19E-04	NA
EP-marine	kg N eq.	3,80E-02	1,19E-02	2,76E-04	3,08E-05	2,55E-02	3,41E-04	NA
EP-terrestrial	mol N eq.	3,56E-01	1,26E-01	3,01E-03	2,46E-04	2,25E-01	2,00E-03	NA
EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment EP-terrestrial = Eutrophication potential, Accumulated Exceedance								
POCP	kg NMVOC eq.	9,65E-02	3,32E-02	8,66E-04	7,16E-05	6,18E-02	5,94E-04	NA
POCP = Formation potential of tropospheric ozone								
ADP-minerals & metals	kg Sb eq.	3,67E-03	3,37E-03	5,24E-07	4,35E-08	2,53E-04	5,02E-05	NA
ADP-fossil	MJ	6,80E+02	1,03E+02	2,42E+00	1,73E-01	5,73E+02	1,29E+00	NA
ADP-minerals & metals = Abiotic depletion potential for non-fossil resources ADP-fossil = Abiotic depletion for fossil resources potential								
WDP	m ³ eq. depr.	9,43E+00	2,80E+00	7,47E-03	6,99E-04	6,57E+00	4,75E-02	NA
WDP = Water Deprivation potential								

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	6/14

Common base of mandatory indicators

Inventory flows indicator – Resource use indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
PERE	MJ	1,31E+02	1,32E+01	3,36E-02	2,89E-03	1,18E+02	1,66E-01	NA
PERM	MJ	9,35E-01	9,35E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA
PERT	MJ	1,32E+02	1,41E+01	3,36E-02	2,89E-03	1,18E+02	1,66E-01	NA
PENRE	MJ	6,78E+02	1,01E+02	2,42E+00	1,73E-01	5,73E+02	1,29E+00	NA
PENRM	MJ	2,59E+00	2,59E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA
PENRT	MJ	6,80E+02	1,03E+02	2,42E+00	1,73E-01	5,73E+02	1,29E+00	NA
PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials								
PERM = Use of renewable primary energy resources used as raw materials								
PERT = Total Use of renewable primary energy resources								
PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials								
PENRM = Use of non-renewable primary energy resources used as raw materials								
PENRT = Total Use of non-renewable primary energy resources								

Inventory flows indicator – Indicators describing the use of secondary materials, water, and energy resources

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
SM	kg	1,11E-05	1,11E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA
FW	m³	5,97E-01	9,68E-02	2,73E-04	3,56E-05	4,98E-01	1,45E-03	NA
SM = Use of secondary material								
RSF = Use of renewable secondary fuels								
NRSF = Use of non-renewable secondary fuels								
FW = Use of net fresh water								

Inventory flows indicator – Waste category indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Hazardous waste disposed	kg	1,02E-03	5,68E-04	6,25E-06	4,48E-07	4,36E-04	7,63E-06	NA
Non- hazardous waste disposed	kg	3,09E+00	7,86E-01	1,41E-01	2,53E-02	2,00E+00	1,41E-01	NA
Radioactive waste disposed	kg	4,53E-03	2,97E-04	1,64E-05	1,12E-06	4,21E-03	7,44E-06	NA

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	7/14

Common base of mandatory indicators

Inventory flows indicator – Output flow indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA
Materials for recycling	kg	1,67E-01	6,88E-02	0,00E+00	2,75E-02	0,00E+00	7,02E-02	NA
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA
Exported energy	MJ	2,28E-01	4,97E-02	0,00E+00	8,09E-02	0,00E+00	9,78E-02	0,00E+00

Inventory flow indicator – other indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Biogenic carbon content of the product	kg of C	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA
Biogenic carbon content of the associated packaging	kg of C	2,51E-02	2,51E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	NA

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	8/14

Optional indicators

Environmental indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
Total use of primary energy during the life cycle	MJ	8,12E+02	8,12E+02	1,17E+02	2,45E+00	1,76E-01	1,45E+00	NA
Emissions of fine particles	incidence of diseases	9,50E-07	9,50E-07	4,37E-07	1,49E-08	1,08E-09	9,48E-09	NA
Ionizing radiation, human health	kBq U235 eq.	1,67E+01	1,67E+01	9,56E-01	1,24E-02	8,79E-04	1,62E-02	NA
Ecotoxicity (fresh water)	CTUe	1,21E+03	1,21E+03	8,38E+02	1,89E+00	1,67E-01	1,25E+01	NA
Human toxicity, car-cinogenic effects	CTUh	2,44E-08	2,44E-08	1,13E-08	5,97E-11	9,76E-12	1,82E-09	NA
Human toxicity, non- carcinogenic effects	incidence of diseases	9,24E-07	9,24E-07	5,19E-07	1,99E-09	1,66E-10	4,72E-08	NA
Impact related to land use/soil quality		1,54E+02	1,54E+02	4,78E+01	1,85E+00	1,20E-01	1,26E+00	NA

Other indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Installation	Use	End of life	Bene- fits
No Other indicators used								

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	9/14

Extrapolation Factors

For other products than the Reference product covered by this PEP, the environmental impacts for each phase of the lifecycle are obtained by a linear correlation with respect to weight for the production, distribution, and end-of-life phase and with respect to average power loss for the use phase. Each environmental indicator value shall be calculated using the following formulas:

For the **manufacturing stage, distribution stage and end-of-life stage**:

$$y = a_n x_1 + b_n$$

where **y** is the considered impact at a specific stage and **x₁** is the **weight of the product**.

For the **use stage**:

$$y = a_n x_2 + b_n$$

Where **y** is the considered impact at a specific stage and **x₂** is the average **power loss** of the product.

The next tables report the linear coefficients **a_n** & **b_n** for each life cycle stage.

Note: The calculation of the coefficient **a₃** & **b₃** for the Installation Stage was not performed because the selected parameters do not affect the values for this stage.

IMPACT CATEGORY	MANUFACTURING		DISTRIBUTION		INST.		USE		END OF LIFE	
	a ₁	b ₁	a ₂	b ₂	a ₃	b ₃	a ₄	b ₄	a ₅	b ₅
<i>Climate change</i>	4.71E-02	8.48E-02	6.98E-04	4.10E-02	1.0E+00	0.0E+00	4.04E-01	6.46E-04	7.42E-04	2.18E-05
<i>Climate change - Fossil</i>	4.67E-02	1.37E-01	6.97E-04	4.10E-02	1.0E+00	0.0E+00	3.90E-01	6.24E-04	7.20E-04	2.12E-05
<i>Climate change - Biogenic</i>	2.74E-04	-5.27E-02	6.46E-07	3.79E-05	1.0E+00	0.0E+00	1.26E-02	2.01E-05	2.12E-05	6.24E-07
<i>Climate change - Land use and LU change</i>	7.64E-05	2.34E-04	2.72E-07	1.60E-05	1.0E+00	0.0E+00	9.22E-04	1.48E-06	5.98E-07	1.76E-08
<i>Ozone depletion</i>	1.10E-08	1.48E-08	1.63E-10	9.60E-09	1.0E+00	0.0E+00	1.97E-08	3.15E-11	6.19E-11	1.82E-12
<i>Acidification</i>	4.19E-04	5.29E-04	3.53E-06	2.08E-04	1.0E+00	0.0E+00	2.22E-03	3.55E-06	1.38E-05	4.07E-07
<i>Eutrophication, freshwater</i>	6.96E-05	3.25E-05	4.50E-08	2.65E-06	1.0E+00	0.0E+00	3.93E-04	6.29E-07	7.08E-07	2.09E-08
<i>Eutrophication, marine</i>	6.95E-05	2.22E-04	1.22E-06	7.14E-05	1.0E+00	0.0E+00	3.70E-04	5.92E-07	2.03E-06	5.98E-08
<i>Eutrophication, terrestrial</i>	7.39E-04	1.64E-03	1.33E-05	7.81E-04	1.0E+00	0.0E+00	3.26E-03	5.22E-06	1.19E-05	3.51E-07
<i>Photochemical ozone formation</i>	1.94E-04	6.19E-04	3.82E-06	2.25E-04	1.0E+00	0.0E+00	8.96E-04	1.43E-06	3.53E-06	1.04E-07
<i>Resource use, minerals and metals</i>	2.01E-05	1.68E-06	2.31E-09	1.36E-07	1.0E+00	0.0E+00	3.67E-06	5.87E-09	2.99E-07	8.80E-09
<i>Resource use, fossils</i>	6.02E-01	2.26E+00	1.07E-02	6.27E-01	1.0E+00	0.0E+00	8.31E+00	1.33E-02	7.67E-03	2.26E-04
<i>Water use (AWARE)</i>	1.44E-02	3.85E-01	3.29E-05	1.94E-03	1.0E+00	0.0E+00	9.54E-02	1.53E-04	2.83E-04	8.33E-06
<i>Total use of primary energy during the life cycle</i>	6.65E-01	5.67E+00	1.08E-02	6.36E-01	1.0E+00	0.0E+00	1.00E+01	1.60E-02	8.66E-03	2.55E-04
<i>Use of renewable primary energy, excluding renewable primary energy resources used as raw materials</i>	6.36E-02	2.48E+00	1.48E-04	8.70E-03	1.0E+00	0.0E+00	1.71E+00	2.74E-03	9.88E-04	2.91E-05
<i>Use of renewable primary energy resources used as raw materials</i>	0.0E+00	9.35E-01	0.0E+00	0.0E+00	1.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
<i>Total use renew. primary energy res.</i>	6.36E-02	3.41E+00	1.48E-04	8.70E-03	1.0E+00	0.0E+00	1.71E+00	2.74E-03	9.88E-04	2.91E-05
<i>Use of non-renewable primary energy, excluding non-renewable primary energy resources used as raw materials</i>	6.02E-01	-3.36E-01	1.07E-02	6.27E-01	1.0E+00	0.0E+00	8.31E+00	1.33E-02	7.67E-03	2.26E-04
<i>Use of non-renewable primary energy resources used as raw materials</i>	0.0E+00	2.59E+00	0.0E+00	0.0E+00	1.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
<i>Total use non-renew. primary energy res.</i>	6.02E-01	2.26E+00	1.07E-02	6.27E-01	1.0E+00	0.0E+00	8.31E+00	1.33E-02	7.67E-03	2.26E-04
<i>Use of secondary material</i>	6.60E-08	1.94E-09	0.0E+00	0.0E+00	1.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
<i>Use of renewable secondary fuels</i>	0.0E+00	0.0E+00	0.0E+00	0.0E+00	1.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
<i>Use of non-renewable secondary fuels</i>	0.0E+00	0.0E+00	0.0E+00	0.0E+00	1.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
<i>Net use of fresh water</i>	5.21E-04	9.22E-03	1.20E-06	7.07E-05	1.0E+00	0.0E+00	7.22E-03	1.16E-05	8.66E-06	2.55E-07
<i>Hazardous waste disposed</i>	3.34E-06	6.37E-06	2.75E-08	1.62E-06	1.0E+00	0.0E+00	6.32E-06	1.01E-08	4.54E-08	1.34E-09
<i>Non-hazardous waste disposed</i>	4.43E-03	4.13E-02	6.23E-04	3.66E-02	1.0E+00	0.0E+00	2.90E-02	4.65E-05	8.36E-04	2.48E-05
<i>Radioactive waste disposed</i>	1.74E-06	4.91E-06	7.22E-08	4.24E-06	1.0E+00	0.0E+00	6.11E-05	9.78E-08	4.43E-08	1.30E-09

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN		1 EN	10/14

IMPACT CATEGORY	MANUFACTURING		DISTRIBUTION		INST.		USE		END OF LIFE	
	a ₁	b ₁	a ₂	b ₂	a ₃	b ₃	a ₄	b ₄	a ₅	b ₅
Particulate matter	2.56E-09	7.49E-09	6.56E-11	3.86E-09	1.0E+00	0.0E+00	7.08E-09	1.13E-11	5.64E-11	1.66E-12
Ionising radiation	5.63E-03	9.61E-03	5.47E-05	3.22E-03	1.0E+00	0.0E+00	2.28E-01	3.64E-04	9.63E-05	2.84E-06
Ecotoxicity, freshwater	4.97E+00	2.07E+00	8.33E-03	4.90E-01	1.0E+00	0.0E+00	5.26E+00	8.41E-03	7.43E-02	2.19E-03
Human toxicity, cancer	6.63E-11	1.51E-10	2.63E-13	1.55E-11	1.0E+00	0.0E+00	1.62E-10	2.59E-13	1.08E-11	3.19E-13
Human toxicity, non-cancer	3.08E-09	1.69E-09	8.79E-12	5.17E-10	1.0E+00	0.0E+00	5.16E-09	8.26E-12	2.81E-10	8.26E-12
Land use	2.39E-01	7.57E+00	8.14E-03	4.78E-01	1.0E+00	0.0E+00	1.50E+00	2.40E-03	7.47E-03	2.20E-04
Component for reuse	0.0E+00	0.0E+00	0.0E+00	0.0E+00	1.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
Materials for recycling	8.44E-05	5.46E-02	8.44E-05	5.46E-02	1.0E+00	0.0E+00	0.0E+00	0.0E+00	4.18E-04	1.23E-05
Materials for energy recovery	0.0E+00	0.0E+00	0.0E+00	0.0E+00	1.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
Exported energy	0.0E+00	4.97E-02	0.0E+00	4.97E-02	1.0E+00	0.0E+00	0.0E+00	0.0E+00	5.82E-04	1.71E-05

For the weight and average power loss data of the variants, please refer to table below.

ABB Code of the specific product	Name	U = Rated voltage (V)	In = Rated current (A)	Np = Number of protected poles	Cd = Tripping curve	Rated Breaking Capability [kA]	Weight [g]	POWER LOSS [W]
2CSA255901R9064	S-ARC1 C6	230	6	1P+N	C	6	203	0.83
2CSA255901R9065	S-ARC1 B6	230	6	1P+N	B	6	203	0.83
2CSA255901R9104	S-ARC1 C10	230	10	1P+N	C	6	203	0.75
2CSA255901R9105	S-ARC1 B10	230	10	1P+N	B	6	203	0.75
2CSA255901R9134	S-ARC1 C13	230	13	1P+N	C	6	203	0.80
2CSA255901R9135	S-ARC1 B13	230	13	1P+N	B	6	203	0.80
2CSA255901R9164	S-ARC1 C16	230	16	1P+N	C	6	203	0.95
2CSA255901R9165	S-ARC1 B16	230	16	1P+N	B	6	203	0.95
2CSA255901R9204	S-ARC1 C20	230	20	1P+N	C	6	203	1.15
2CSA255901R9205	S-ARC1 B20	230	20	1P+N	B	6	203	1.15
2CSA255901R9254	S-ARC1 C25	230	25	1P+N	C	6	203	1.13
2CSA255901R9255	S-ARC1 B25	230	25	1P+N	B	6	203	1.13
2CSA255901R9324	S-ARC1 C32	230	32	1P+N	C	6	203	1.45
2CSA255901R9325	S-ARC1 B32	230	32	1P+N	B	6	203	1.45
2CSA255901R9404	S-ARC1 C40	230	40	1P+N	C	6	203	1.80
2CSA255901R9405	S-ARC1 B40	230	40	1P+N	B	6	203	1.80
2CSA255908R9064	SX-ARC1 C6	230	6	1P+N	C	6	168	0.78
2CSA255908R9065	SX-ARC1 B6	230	6	1P+N	B	6	168	0.78
2CSA255908R9104	SX-ARC1 C10	230	10	1P+N	C	6	168	0.81
2CSA255908R9105	SX-ARC1 B10	230	10	1P+N	B	6	168	0.81
2CSA255908R9134	SX-ARC1 C13	230	13	1P+N	C	6	168	0.81
2CSA255908R9135	SX-ARC1 B13	230	13	1P+N	B	6	168	0.81
2CSA255908R9164	SX-ARC1 C16	230	16	1P+N	C	6	168	1.31
2CSA255908R9165	SX-ARC1 B16	230	16	1P+N	B	6	168	1.31
2CSA255908R9204	SX-ARC1 C20	230	20	1P+N	C	6	168	1.48
2CSA255908R9205	SX-ARC1 B20	230	20	1P+N	B	6	168	1.48
2CSA275901R9064	S-ARC1 M C6	230	6	1P+N	C	10	207	0.83
2CSA275901R9065	S-ARC1 M B6	230	6	1P+N	B	10	207	0.83
2CSA275901R9104	S-ARC1 M C10	230	10	1P+N	C	10	207	0.75
2CSA275901R9105	S-ARC1 M B10	230	10	1P+N	B	10	207	0.75

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	11/14

ABB Code of the specific product	Name	U = Rated voltage (V)	In = Rated current (A)	Np = Number of protected poles	Cd = Tripping curve	Rated Breaking Capability [kA]	Weight [g]	POWER LOSS [W]
2CSA275901R9134	S-ARC1 M C13	230	13	1P+N	C	10	207	0.80
2CSA275901R9135	S-ARC1 M B13	230	13	1P+N	B	10	207	0.80
2CSA275901R9164	S-ARC1 M C16	230	16	1P+N	C	10	207	0.95
2CSA275901R9165	S-ARC1 M B16	230	16	1P+N	B	10	207	0.95
2CSA275901R9204	S-ARC1 M C20	230	20	1P+N	C	10	207	1.15
2CSA275901R9205	S-ARC1 M B20	230	20	1P+N	B	10	207	1.15
2CSA275901R9254	S-ARC1 M C25	230	25	1P+N	C	10	207	1.13
2CSA275901R9255	S-ARC1 M B25	230	25	1P+N	B	10	207	1.13
2CSA275901R9324	S-ARC1 M C32	230	32	1P+N	C	10	207	1.45
2CSA275901R9325	S-ARC1 M B32	230	32	1P+N	B	10	207	1.45
2CSA275901R9404	S-ARC1 M C40	230	40	1P+N	C	10	207	1.80
2CSA275901R9405	S-ARC1 M B40	230	40	1P+N	B	10	207	1.80

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	12/14

Environmental Impact Indicator Glossary

Impact indicators

Indicator	Description	Distribution
Global warming potential (GWP) - total	Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential (GWP-total) is the sum of three sub-categories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change	kg CO ₂ eq.
Ozone depletion (ODP)	Emissions to air that contribute to the destruction of the stratospheric ozone layer	kg CFC-11 eq.
Acidification of soil and water (A)	Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides	H ⁺ eq.
Eutrophication (E)	Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial.	kg P eq., kg N eq., mole N eq.
Photochemical ozone creation (POCP)	Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun.	kg NMVOC eq.
Depletion of abiotic resources – elements (ADPe)	Indicator of the depletion of natural non-fossil resources	kg Sb eq.
Depletion of abiotic resources – fossil fuels (ADPf)	The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste)	MJ (lower heating value)
Water Deprivation potential (WDP)	Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived.	m ³ eq. depr.

Resource use indicators

Indicator	Description	Distribution
Total use of primary energy	Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy re-sources (primary energy and primary energy resources used as raw materials)	MJ (lower heating value)

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	13/14

Registration number: ABBG-00215-V01.01-EN	Drafting Rules: PEP-PCR-ed4-EN-2021 09 06 Supplemented by: PSR-0005-ed2-EN-2016 03 29
Verifier accreditation number: VH42	Information and reference documents: www.pep-ecopassport.org
Date of issue: Aug-23	Validity period: 5 years
Independent verification of the declaration and data, in compliance with ISO 14025: 2006	
Internal: ☐	External: ☒
Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"	
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019 The elements of the present PEP cannot be compared with elements from any other program.	
Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"	

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	ABBG-00215-V01.01-EN	1	EN	14/14