

Stack light compact

Compact, Essential, Simple

Eaton's stack light compact offers all the essential functionality you would expect from a stack light in one simple compact design.



EATON

Powering Business Worldwide



Features and benefits

- Eaton's stack light compact combines functionality and design in one product to enhance the look and feel of the machine
- The combination of the bright LED modules and fully integrated acoustic module (>70 decibels/pulse tone) ensure the status of the application can clearly be seen and heard
- The IP66 Protection class ensures the stack light compact can be used in harsh and humid environments
- The M12 on the hole mounted option makes the installation very easy as it requires minimal wiring effort



Specifications

- Modules:
 - 3 continuous illumination lights (red/yellow/green)
 - Red blinking light
 - Optional integrated acoustic (>70dB/pulse tone)
- 3 Mounting options
 - Standard 100 mm base
 - Wall mounting
 - 22 mm Hole mounting
- Connection
 - Push-in (standard base and wall mounting)
 - M22 base/M12 plug (hole mounting)
- Voltage:
 - 24 V and 230 V
 - 120 VAC available on request
- 61 mm diameter
- UV Protected material
- IP66


Range overview

	Rated operational voltage	Module without acoustic		Module with acoustic pulse tone -----	
		Part no. Article no.		Part no. Article no.	
Complete devices with standard base					
	24 VDC	SLC-100-RYG-24 EP-400208		SLC-100-RYG-AP-24 EP-400211	
	24 VUC*	SLC-100-RYG-24UC EP-400194		SLC-100-RYG-AP-24UC EP-400197	
	120 VAC	SLC-100-RYG-120 EP-400200		SLC-100-RYG-AP-120 EP-400202	
	230 VAC	SLC-100-RYG-230 EP-400214		SLC-100-RYG-AP-230 EP-400216	
Complete devices with M22 hole mounting and M12 plug					
	24 VDC	SLC-M22-RYG-24 EP-400210		SLC-M22-RYG-AP-24 EP-400213	
	24 VUC*	SLC-M22-RYG-24UC EP-400196		SLC-M22-RYG-AP-24UC EP-400199	
Complete devices with wall base					
	24 VDC	SLC-FW-RYG-24 EP-400209		SLC-FW-RYG-AP-24 EP-400212	
	24 VUC*	SLC-FW-RYG-24UC EP-400195		SLC-FW-RYG-AP-24 EP-400198	
	120 VAC	SLC-FW-RYG-120 EP-400201		SLC-FW-RYG-AP-120 EP-400203	
	230 VAC	SLC-FW-RYG-230 EP-400215		SLC-FW-RYG-AP-230 EP-400217	


* UC = Universal current (AC/DC)

Dimensions

Standard base SLC-100-RYG

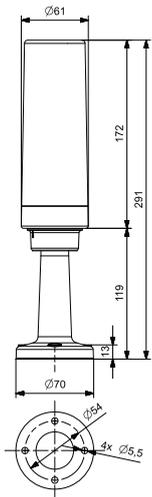


M22 hole mounting SLC-M22-RYG

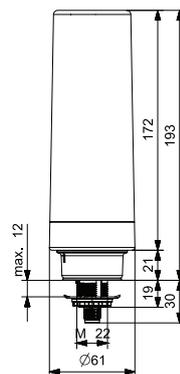

With M12 plug

Wall mounting SLC-FW-RYG

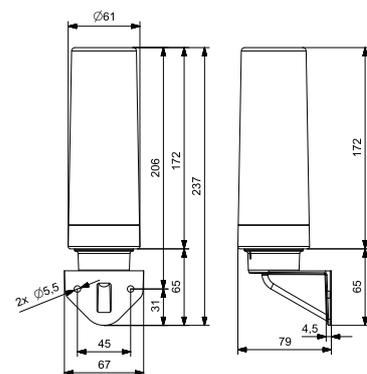

The products, information and prices contained in this document are subject to change. The same is true for any errors or omissions. Only the order confirmation and the technical documentation received from Eaton are binding. Photos and illustrations are indicative only and do not serve as proof of any appearance or functionality. Their use in any form must be approved in advance by Eaton. The same applies for brand names (in particular Eaton, Moeller, Cutler-Hammer, Cooper and Bussmann). Eaton's terms of sale, as published on Eaton's websites and included with order confirmations received from Eaton, apply.

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.com

© 2024 Eaton
All Rights Reserved
Publication No. SA047011EN
January 2024

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

