




EMERGENCY LIGHTS | SERIE SLX

72h



# SLX EL LED FLAT COVER 8h 24m IR WM

ITEM NUMBER EN10077302 |  
GTIN 4015120077302



- Single-battery emergency light for escape route signage with 8 h emergency light duration and viewing distances of 24 m
- Self-monitoring with coloured status indicator
- Tamper-resistant function check can be executed by remote control or magnet
- Optionally, operation in continuous or stand-by mode possible

TECHNICAL DATA

GENERAL

Device category	Escape sign light
Product information	For indoor use only.



## GENERAL

Included in delivery	Includes 4 self-adhesive symbol sheets with 24 m viewing distance (right, left, upwards and downwards arrows) and rechargeable battery
----------------------	--

Remote controllable

Conformity CE, EAC, RoHS, WEEE

Warranty 5 years

## MOUNTING

Installation type Surface mounting

Installation position Wall

Installation dimension  
Installation length: 430 mm x  
Installation width: 155 mm x  
Installation depth: 66 mm,

Type of connection Push terminal

## HOUSING

Dimensions  
Length 388 mm x Width 148 mm x  
Height/Depth 46 mm

Weight 709 g

Material UV-stabilised polycarbonate

Protection type IP54

Permissible ambient temperature 5 °C...+35 °C

Colour white, similar to RAL 9016

## ELECTRICAL VERSION

Control system ON/OFF

## ELECTRICAL VERSION

Protection class	II
Nominal voltage	230 V ~ / 50 Hz

## LIGHT




Light emission	direct
Rated output P	3 W

\* Industry standard value for the average rated life. Alternative values for specific project tenders as well as the mandatory lifetime values for all included light sources in accordance with the ecodesign directive (L70B50) can be found in the data sheet.

## EMERGENCY LIGHTING

Viewing distance	24 m
Symbol height	120 mm
Light duration	8 h
Switching type	Continuous mode/standby mode
Power feed	Decentralised (single-battery)
Battery	NiCd 3,6 V / 0,8 Ah
Charging time	20 hours min.
Status display	by LED

## DOWNLOADS

GENERAL	All files as ZIP	
Data sheet	PDF	
Declaration of conformity	PDF	

## LIGHT AND BUILDING PLANNING

## LIGHT AND BUILDING PLANNING

Planning data BIM



## INSTALLATION

Short instruction

PDF



## TENDER SPECIFICATIONS

Invitation to tender text neutral  
(rtf)

RTF



Invitation to tender text neutral  
(x81)

X81



Tender text with leading brand

RTF



## ACCESSORIES

### MOUNTING



#### SLX/ELX MOUNTING FRAME 430 FM

Item number **EN10077234**

Installation frame for SLX and ELX series, installation  
hole size 430 x 155 mm



### PROTECTION



#### SLX/ELX BASKET GUARD WALL

Item number **EN10077265**

Basket guard for SLX and ELX series, 80 mm high



### REMOTE CONTROL



## ESY-Pen

Item number **EP10425356**  
ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management



## SYMBOL



## SLX 24 FLAT SYMBOL SET II

Item number **EN10077517**  
Symbol set for SLX series, FLAT, 24 m detection range right upwards, left upwards, right downwards, left downwards



## SPARE PARTS

### BATTERY



## SLX BATTERY NiCd 800mAh

Item number **EN10077401**  
NiCd rechargeable battery (3.6V/800 mAh) for SLX series with reverse polarity protected plug-in connection




## SYMBOL




## SLX 24 FLAT SYMBOL SET I

Item number **EN10077500**  
Symbol set for SLX series, FLAT, 24 m detection range right, left, upwards, downwards

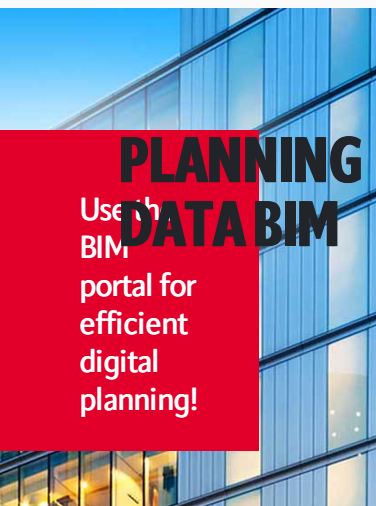

## PLANNING DATA BIM

Use the BIM portal for efficient digital planning!

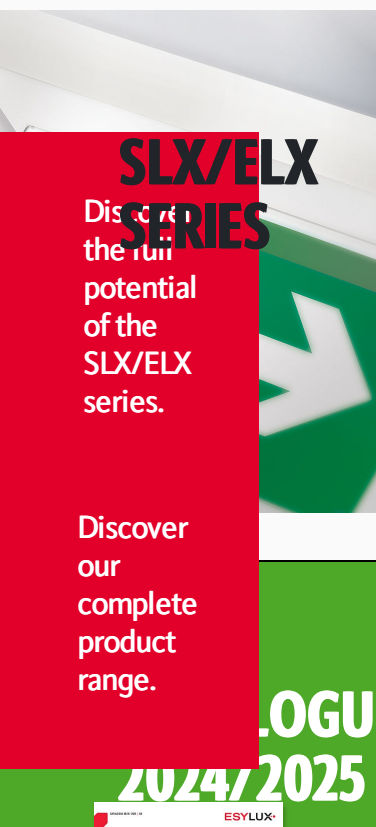

## SLX/ELX SERIES

Discover the full potential of the SLX/ELX series.

Discover our complete product range.

LOGUE  
2024/2025



## ESY-PEN AND ESY APP!

Easy parameterisation, remote control and documentation.

# SIMILAR PRODUCTS

# OTHER PRODUCTS

**OLIVIA**  
MOISTURE-PROOF LIGHTS



**OLIVIA-2**  
MOISTURE-PROOF LIGHTS



**SLP-2**  
PORTABLE SPOTLIGHT



**COMPACT**  
PRESENCE AND MOTION  
DETECTORS



**COMPACT  
EXPRESS**  
PRESENCE AND MOTION  
DETECTORS



**STANDARD**  
PRESENCE AND MOTION

## DETECTORS



## SERVICE

### Downloads

Catalogues and brochures

Videos

Tender specifications

KNX product database

Mobile apps

### Knowledge

Academy & Training

Name concept

Online Demo ESY-App

Covers for wall detectors

Ecodesign Directive

Presence and Motion detectors

### Support

Planning & project support

BIM-Portal

### ESYLUX Services

ESYCOMPARE

ESYWORLD

## SOLUTIONS

### Offices

Group offices

Open-plan office

Meeting rooms

Reversible offices

Communal areas

### Education

Classrooms

Break rooms

Mensas

### Daycare centers

Playrooms

### Health Care

Patient rooms

Examination rooms

Multi-purpose rooms

Canteens

### Outdoor areas

Pathways and entrances

Multi-storey car parks

Outdoor car parks

Secondary areas



## Secondary areas

Corridors  
Staircases  
Side rooms  
Sanitary facilities

## PRODUCTS

### Indoor automation

Presence and motion detectors  
Brightness controller  
Controls  
Smoke alarm

### Indoor lighting

Lighting systems  
Recessed lights  
Wall and ceiling lights  
Downlights  
Moisture-proof lights  
Emergency lights  
Portable spotlight

### Outdoor automation

Motion detectors  
Twilight switch

### Outdoor lighting

Wall lights  
Up-/Downlights  
Bollard lights  
Floodlights

## HIGHLIGHTS

ALVA  
SVENJA  
Emergency Lights  
CELINE-2  
SLP-2  
ATMO  
Downlights  
Outdoor Floodlights  
ESYLUX Light Control  
DEFENSOR  
COMPACT  
ESY-Pen  
FLAT  
OLIVIA-2  
Switch lights on and off  
hygienically  
Focus products Q2/2024

## INNOVATIONS

Demand-driven Automation  
Intelligent Lighting  
Human Centric Lighting  
Light control with DALI-2

## COMPANY

Vision and mission  
Experience and quality  
Corporate responsibility  
Research and development  
Cooperations and  
memberships  
Awards and prizes  
References

PRESS

- Press releases
- Images
- ESYWORLD

- Imprint |
  - Privacy policy |
  - Privacy settings |
  - Whistleblowing |
  - General terms and conditions |
  - Guarantee |
  - Disclaimer |
  - Contact
- © 2024 ESYLUX GmbH

