

—  
TECHNICAL DATA

# **ABB i-bus® KNX**

WES/A 4.1.1

Weather Sensor Basic, SM



—

### **Device description**

The device is a surface mounted (SM) device. The device is designed for wall or mast mounting.

The device can be used as a product in a KNX system.

The device is powered via Weather Unit WZ/S 1.3.1.2 (or subsequent types) and requires no additional auxiliary voltage. The power supply/data cable is connected to the pre-assembled connecting cable. After being connected to the Weather Unit and having the bus and supply voltage established, the Weather Sensor will begin sending weather data to the Weather Unit after no longer than 2 minutes.

---

## Device functions

Weather Sensor Basic WES/A 4.1.1 records – primarily in the private sector – weather data (wind speed, rain, brightness in four compass directions, twilight, temperature), plus date and time (via GPS).

### Note

Measured values apply to the mounting location. Differences from other weather services are possible (e.g. due to local turbulence or air accumulation zones).

### Note

Weather Sensor Basic WES/A 4.1.1 is compatible with the ABB Weather Units from WZ/S 1.3.1.2.

### Note

Weather Unit WZ/S 1.3.1.2 can process only three measured brightness values. The measured value from brightness sensor 4 is ignored. If Weather Unit WZ/S 1.3.1.2 is used, the "N" marking must be aligned in the southern direction when the Weather Sensor is mounted on a mast. The measured values are evaluated as follows in the ETS application:

- Brightness sensor 1 = Brightness at the center
- Brightness sensor 2 = Brightness at the right
- Brightness sensor 3 = Brightness at the left

---

## Connections

The device has the following connections:

- 1 input for connecting the supply voltage (via the Weather Unit)
- 1 output for output of the measured values

---

## Inputs


Terminal designation	Function
+	Power supply +24 V DC
-	Supply GND

---

## Outputs


Terminal designation	Function
A	DATA +
B	DATA -

—  
**Dimension drawing for Weather Sensor WES/A 4.1.1**

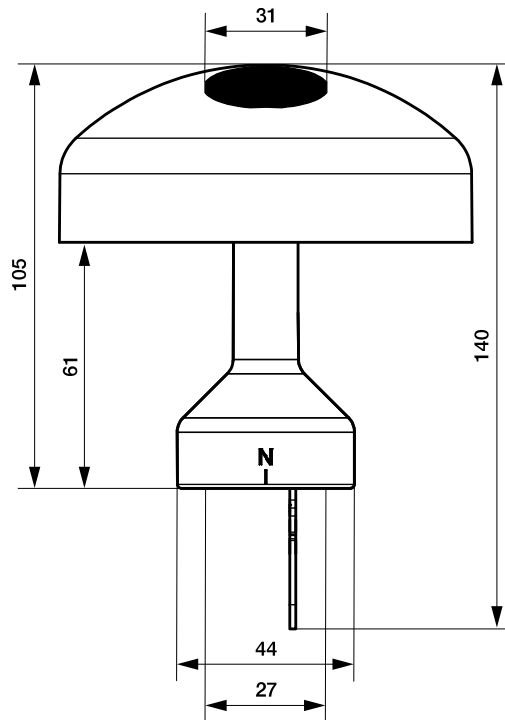

9AKK108464A0554

—  
Connection diagram

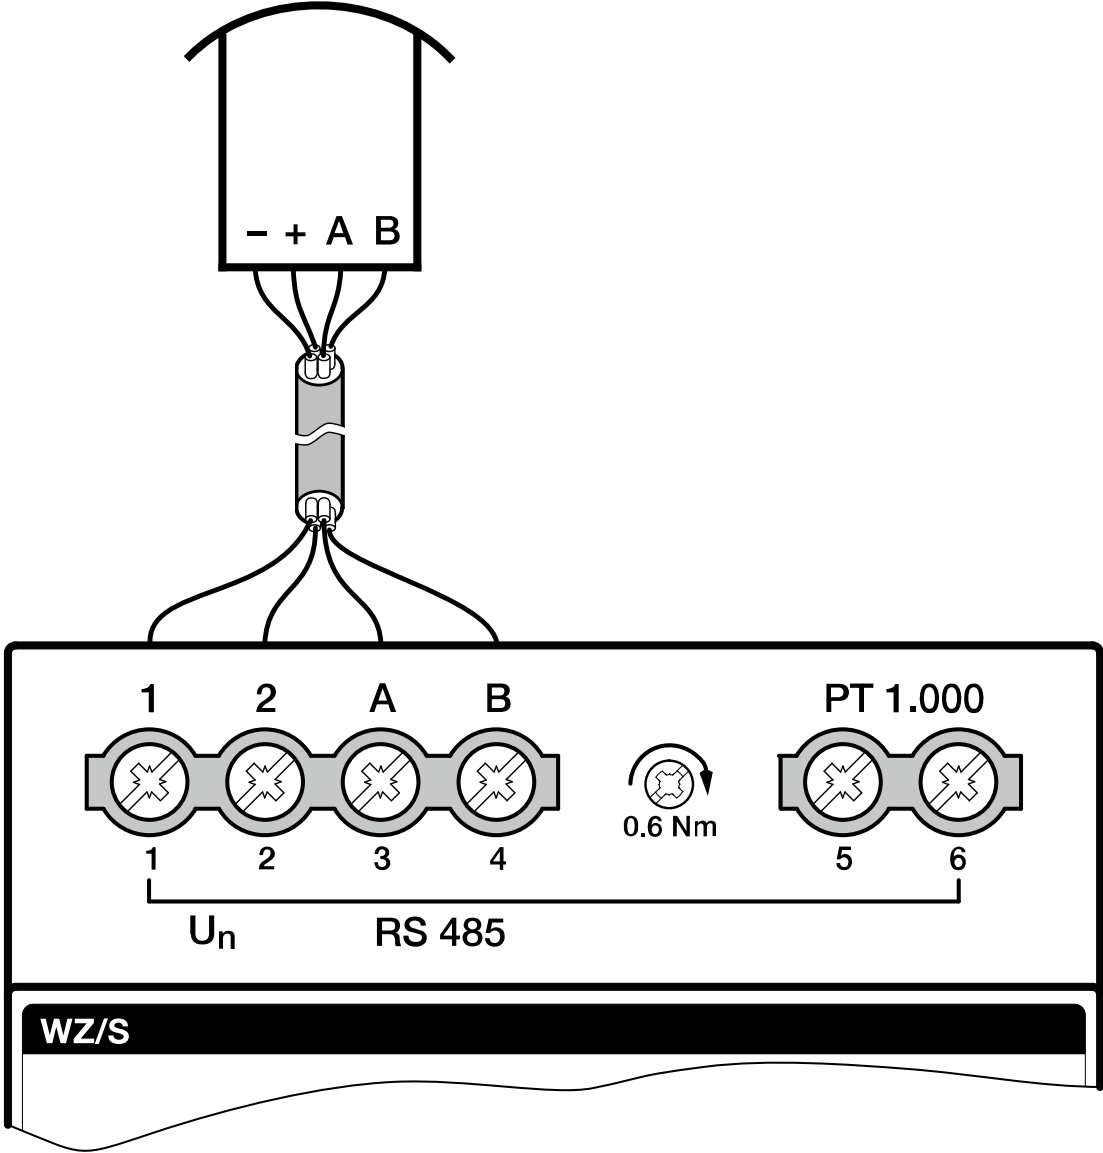

9AKK108464A0563

WES/A terminal	Conductor color	WZ/S terminal
A (DATA +)	Red	A
B (DATA -)	Black	B
- (GND)	White	1
+ (24 V)	Yellow	2

## 2D code

The packaging and the device are labeled with a 2D code. These codes are used for unique identification of the device and include the following information:

- Link to the product page
- Order number
- Device serial number

The 2D codes can be read using any mobile device with an appropriate 2D code reader.

By scanning the 2D codes with the [ABB Product Scanner](#), you can open additional digital services.

## General technical data

		WES/A 4.1.1
Device	Dimensions	105 × 102 × 102 mm (H x W x D)
	Weight	0.16 kg
	Mounting position	Horizontal
	Design	Surface mounting
	Degree of protection	IP 44
	Protection class	II
	Overvoltage category	III
	Overload protection	Yes
	Reverse voltage protection	Yes
	Short-circuit proof	Yes
Mounting	Pollution degree	2
	Mean service life (depending on installation type and location)	> 5 years
	Mounting type	Wall or mast mounting
	Mast inner diameter	21 mm
	Mast outer diameter	27 mm (50 mm with MA/Z1.50.1)
Cable length	Between Weather Sensor and Weather Unit, one way	≤ 100 m
Materials	Housing	Polycarbonate
	Housing color	Translucent white
Material note	Fire classification	Flammability V-0
Electronics	Rated voltage	24 V DC +10 % / -30 %
	Current consumption	< 50 mA
Connections	Connection type, Weather Sensor	Plug-in terminal
	Cable length, pre-assembled connecting cable	270 mm with wire end ferrule
	Cable type, pre-assembled connecting cable	H05V-K, 4 × 0.5 mm <sup>2</sup>
Certificates and declarations	CE declaration of conformity	→ <a href="#">9AKK108464A0567</a>
	UKCA declaration of conformity	→ <a href="#">9AKK108464A0568</a>
Ambient condition	Operation	-30 ... +70 °C
	Transport	-25 ... +70 °C
	Storage	-25 ... +70 °C
	Humidity	Non-condensing
	Atmospheric pressure	≥ 80 kPa (corresponds to air pressure at 2,000 m above sea level)

## Weather sensors

		WES/A 4.1.1
Temperature	Type	PT 1000
	Number of temperature sensors	1
	Temperature measuring range	-30 ... +50 °C
	Resolution	0.1°C
	Accuracy	± 1 °C with laminar incident flow and wind speed > 2 m/s

		WES/A 4.1.1
<b>Brightness</b>	Type	Silicon sensor
	Number of brightness sensors	4 (0°, 90°, 180°, 270°)
	Brightness measuring range	0 ... 100 klx
	Resolution	10 lx (0 ... 1 klx); 50 lx (1 k ... 2 klx); 100 lx (2 k ... 20 klx); 500 lx (≥ 20 klx)
	Accuracy	± 200 lx at < 2 klx; ± 10 % at ≥ 2 klx
	Spectral range	475 ... 650 nm
<b>Twilight</b>	Type	Silicon sensor
	Number of twilight sensors	1
	Twilight measuring range	0 ... 1 klx
	Resolution	1 lx
	Accuracy	± 20 lx at < 100 lx; ± 20 % at ≥ 100 lx
<b>Daylight</b>	Day	≥ 10 lx
	Night	< 10 lx
<b>Wind speed</b>	Type	Thermal anemometer
	Number of wind sensors	1
	Wind speed measuring range	0 ... 35 m/s
	Resolution	0.1 m/s
	Accuracy	± 5 % (± 1 m/s), RMS over 360°
<b>Precipitation</b>	Type	Ceramic, capacitance measurement
	Number of precipitation sensors	1
	Precipitation measuring range	1/0 (precipitation Yes/No)
	Heating power, dry sensor, condensation protection	0.1 W
	Heating power, wet sensor, drying phase	1.1 W
<b>GPS</b>	GPS type	Galileo
	Real Time Clock (RTC)	Yes, used in the µC



## Ordering details

Description	MB	Type	Order no.	Packaging unit [pcs.]	Weight (incl. packaging) [kg]
Accessories: Wall mounting basic	-	WB/Z 1.1.1	2CDG120088R0011	1	0.191
Weather Sensor Basic, SM	-	WES/A 4.1.1	2CDG120091R0011	1	0.298
Accessories: Wall mounting IP 44	-	WB/Z 1.2.1	2CDG120093R0011	1	0.210
Accessories: Mast Mounting Adapter, 50 mm	-	MA/Z 1.50.1	2CDG120094R0011	1	0.150



---

**ABB STOTZ-KONTAKT GmbH**

Eppelheimer Straße 82

69123 Heidelberg, Germany

Phone: +49 (0)6221 701 607

Fax: +49 (0)6221 701 724

Email: [knx.marketing@de.abb.com](mailto:knx.marketing@de.abb.com)

**Additional information and regional  
points of contact:**

[www.abb.de/knx](http://www.abb.de/knx)

[www.abb.com/knx](http://www.abb.com/knx)

---

© Copyright 2024 ABB. We reserve the right to make technical changes to the products as well as amendments to the content of this document at any time without advance notice. The agreed properties are definitive for any orders placed. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Reproduction, transfer to third parties or processing of the content – including sections thereof – is not permitted without the prior written consent of ABB AG.

