


EU
xComfort CJAU-01/X




	Min. Version 1.20
	Min. Version 3.5





	T=-25°C - +70°C
	T=-5°C - +45°C

IP20

	1,5 mm²
	10 mm

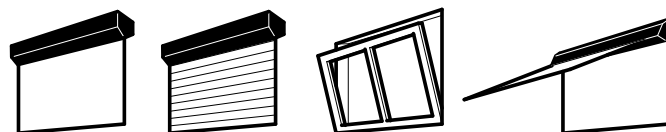



868,3 MHz

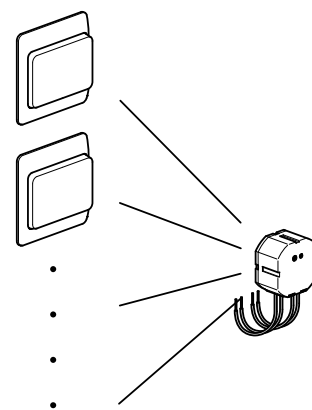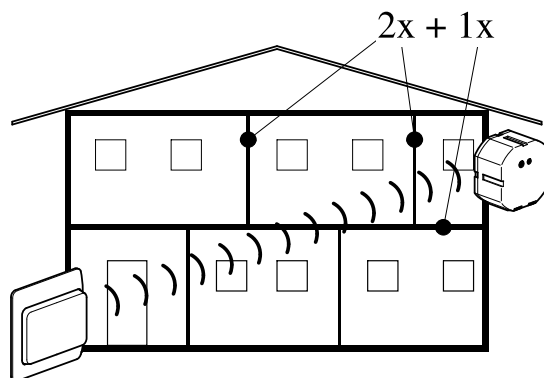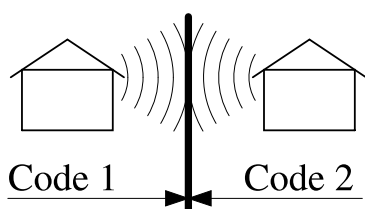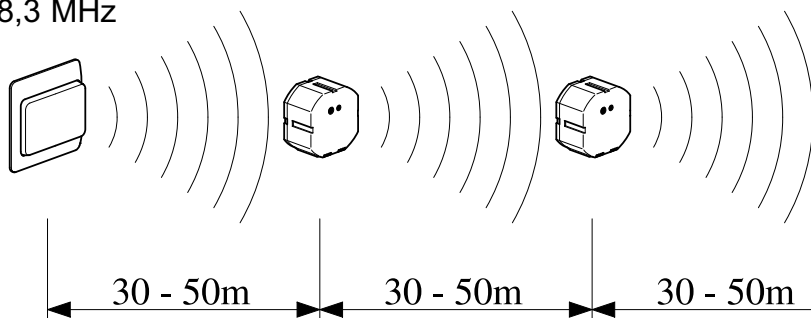

max. 15

~ 60-90%	~ 80-95%	~ 20-60%	~ 0-10%	~ 70-90%



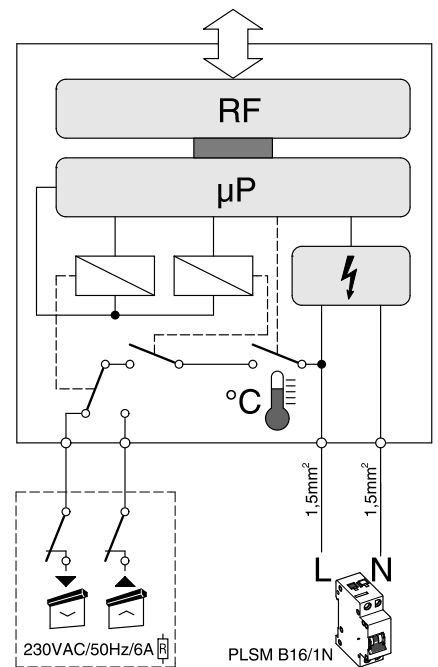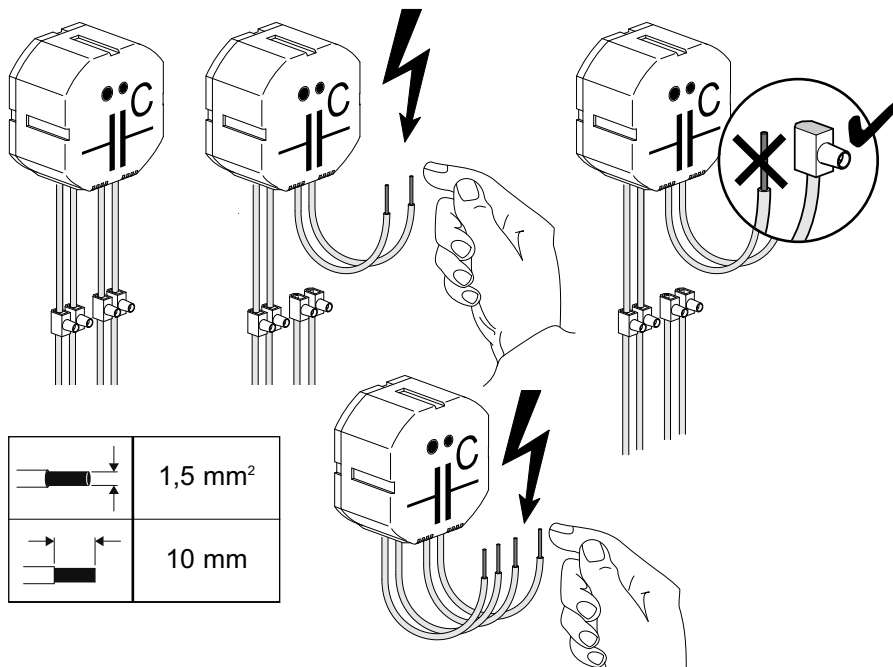

Declaration of Conformity

We, EATON Industries (Austria) GmbH
3943 Schrems, Eugenia 1
Austria

declare under our sole responsibility that the product (family)

**Eaton - Shutting actuator,
CJAU-...**

(the declaration of conformity applies to all
listed types within our actual product catalogue)

provided that it is installed, maintained and used in the
application intended for, with respect to the relevant manufacturers
instructions, installation standards and "good engineering practices"

complies with the provisions of Council directive(s):

RED Directive 2014/53/EU

RoHS Directive 2011/65/EU

based on compliance with following standard(s):

EN 301489-3 V2.1.1, EN 300220-2 V3.1.1, EN 50491-5-1:2010,
EN 50491-5-2:2010, EN 62479:2010, EN 50428:2005 + A1:2007 +
A2:2009, EN 50581:2012

EU- type examination performed by:
TÜV Austria Services GmbH, Notified Body
1230 Vienna, Deutschstrasse 10, Austria

Affixing date of CE mark: 2003
Doc.Id.: CJAU-..._171117

Fernando Ceccarelli

Senior Vice President
General Manager

17.11.2017

Friedrich Schröder

Director Quality
& Systems



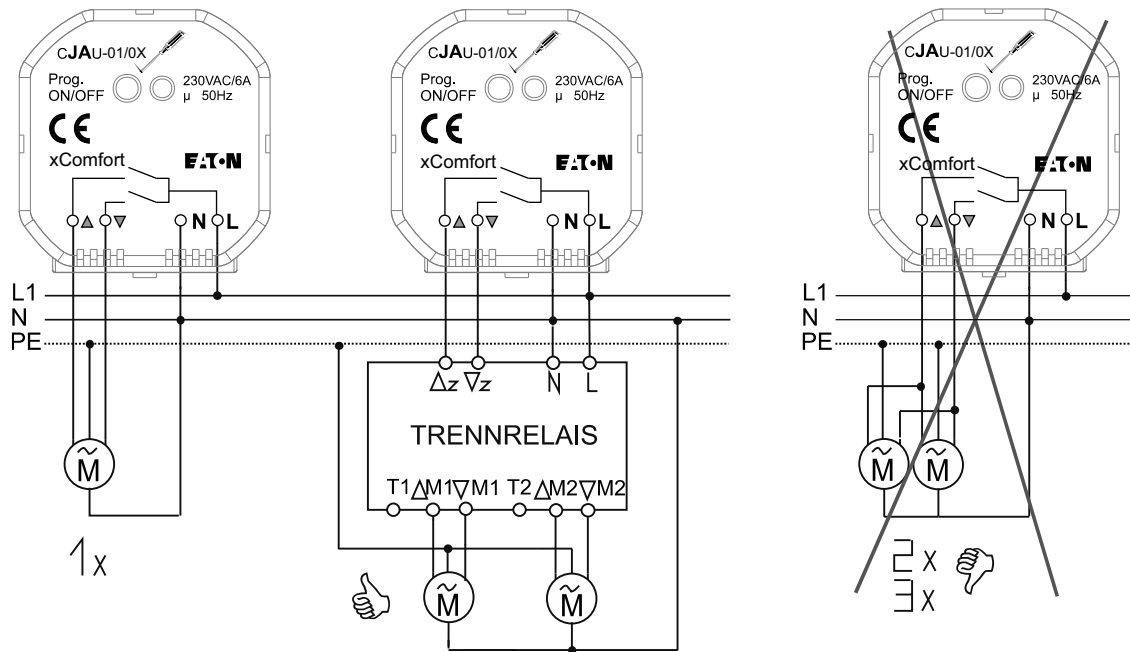


Diagram showing correct and incorrect wiring for Eaton modules. Correct wiring is indicated by a thumbs up icon, and incorrect wiring by a thumbs down icon.

EATON

RF- SYSTEM

BASIC - MODE - CARD

CTAA-01/01
CTAA-02/01
CBEU-02/01
CBEU-02/02
CRCA-00/01
CHSZ-00/01

CSAU-01/01
CJAU-01/01
CDAU-01/01

Diagram showing correct and incorrect wiring for Eaton modules. Correct wiring is indicated by a thumbs up icon, and incorrect wiring by a thumbs down icon.



