

Produktdatablad

Spesifikasjoner



Lysenhet for XVB7 lyskolonne i Ø70 mm i oransje med LED blits på 2J

EI-nummer:
4325581

XVB7C65

EAN: 3606487129431

Hoved data

| | |
|------------------------------|-------------------|
| Produktspekter | Harmony XVB7 |
| Produkt eller type komponent | Light module |
| Sammensetning av enhet | Standard lens |
| Kortnavn utstyr | XVB7 |
| Montasjediameter | 70 mm |
| Signaltype | Blinkende |
| Light color | LED, Orange |
| Materiale | PC (polykarbonat) |
| Vekt | 0,108 kg |
| Monteringsposisjon | Upright/inverted |

Tilleggs Teknisk data

| | |
|---------------------------------------|--|
| blinkfrekvens | 2 Hz |
| Levetid timer | 50000 h |
| [Ue] merkespenning | 24 V AC/DC |
| merkespennings grenser | 21.6...26.4 V AC/DC |
| Strømforbruk | 180 mA på 24 V AC 250 mA på 24 V DC |
| startstrøm | 1 A |
| beskyttelsesklasse for elektrisk støt | Klasse II |
| [Ui] isolasjonsspenning | 50 V |
| [Uimp] nominell impulsspenning | 0,5 kV |

Miljø

| | |
|----------------------------------|--|
| Forurensninggrad | 2 |
| Omgivelsestemperatur drift | -25...60 °C |
| Omgivelsestemperatur for lagring | -40...70 °C |
| IP-grad | IP66 |
| Environmental Type ratings | Type 4/4X/12/13 indoor use only |
| Vibrasjonsmotstand | 6 gn, amplitude = +/- 0.5 mm (f = 10...500 Hz) i drift |
| støtmotstand | 30 gn (varighet = 6 ms) for i drift |

| | |
|-------------------|---|
| Standarder | UL 60947-5-1 IEC 60947-5-1 CSA C22.2 No 60947-5-1 |
|-------------------|---|

| | |
|----------------------------|-----------------------------------|
| Produktsertifikater | cULus CCC RCM UKCA CE |
|----------------------------|-----------------------------------|

Forpakkingsenheter

| | |
|---------------------------------|-----------|
| Enhetsstype pakke 1 | PCE |
| Antall enheter i pakke 1 | 1 |
| Pakke 1 Høyde | 8,636 cm |
| Pakke 1 Bredde | 8,636 cm |
| Pakke 1 Vekt | 8,636 cm |
| Package 1 Weight | 108,862 g |

Garantiperiode

| | |
|----------------|-----------|
| Garanti | 18 months |
|----------------|-----------|

Environmental Data

Schneider Electric tar sikte på å oppnå Net Zero-status innen 2050 gjennom partnerskap med leverandørkjeden, materialer med lavere slagkraft og sirkularitet via vår pågående "Use Better, Use Longer, Use Again"-kampanje for å forlenge produktlevetiden og resirkulerbarheten.

[Environmental Data forklart >](#)

[Hvordan vi vurderer produktets bærekraft >](#)

Miljøfotavtrykk

Karbonavtrykk (kg CO2 ekv.) 66

Miljøinformasjon [Produktmiljøprofil](#)

Use Better

Materialer og emballasje

Emballasje med resirkulert papp Nei

Emballasje uten plast Nei

[EUs RoHS-direktiv](#) Oppfyller kravene med unntak

REACH-forordningen [REACH-erklæring](#)

Use Again

Ompakking og reproduksjon


Sirkularitetsprofil [Informasjon om levetidsslutt](#)

Tilbaketakning No

WEEE  Produktets avhending må skje i overensstemmelse med EUs avfallsforskrifter, og produktet skal aldri deponeres i restavfallsstrømmen.


Dimensions Drawings

Dimensions

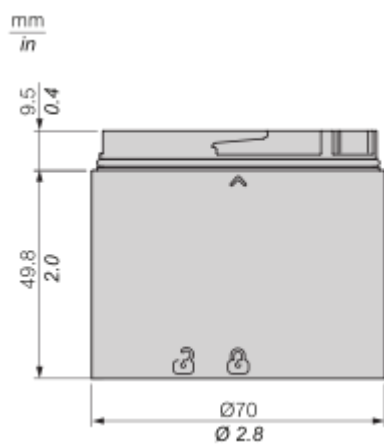

Mounting and Clearance

Mounting Overview

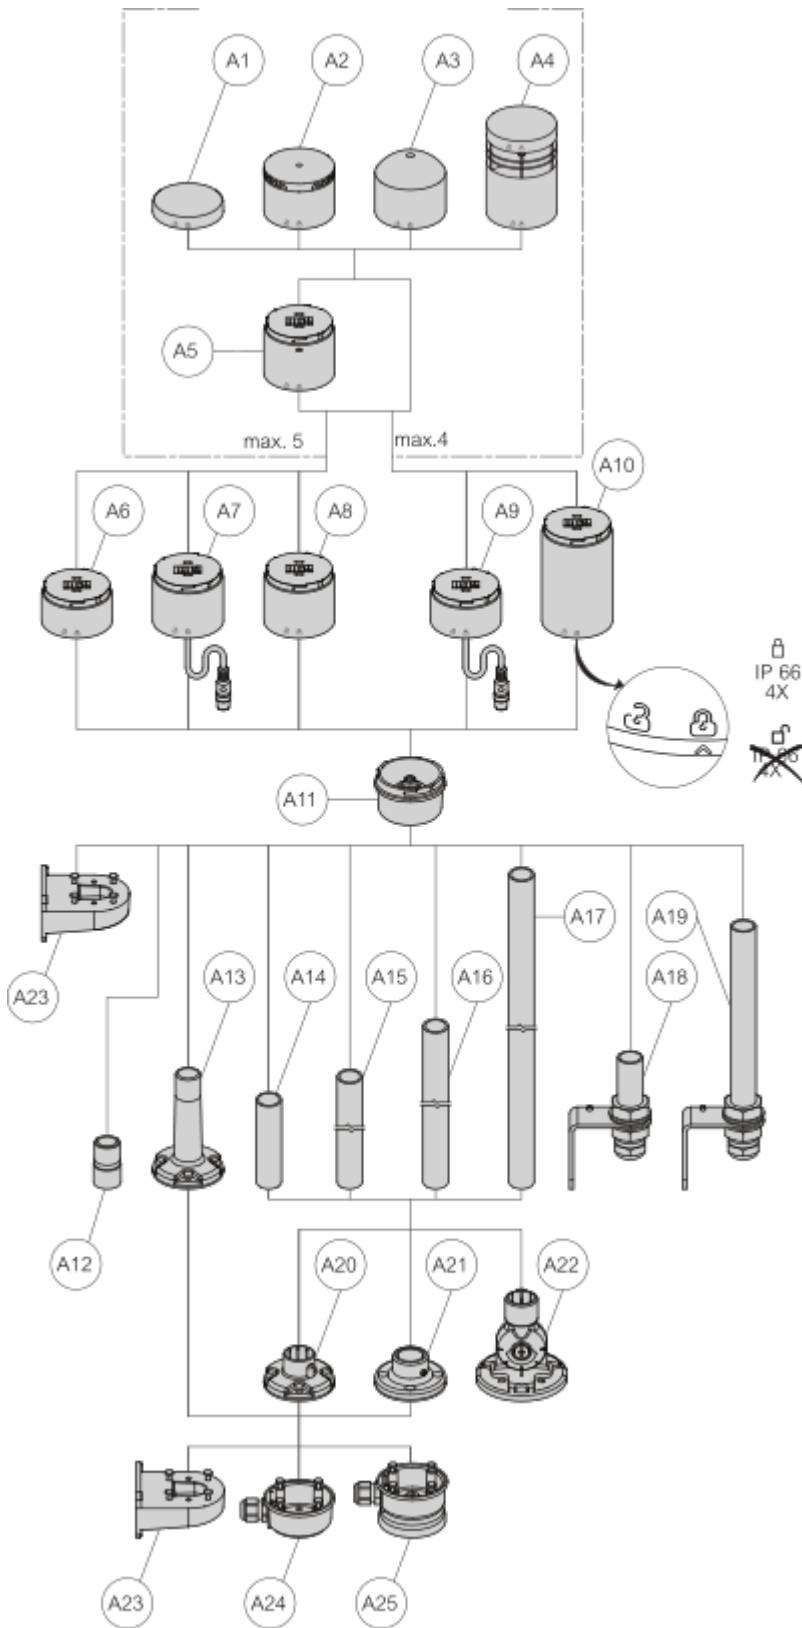


| Drawing | Part Number | Part Description |
|---------|-------------|------------------|
|---------|-------------|------------------|

| | | |
|--------------|-------------|------------------------------------|
| A1, A6, A11 | XVB7C21B... | 24V Base Direct / Tube & Cover |
| A1, A7, A11 | XVB7C31 | IO Link Base Direct / Tube & Cover |
| A1, A8, A11 | XVB7C51 | USB Base Direct / Tube & Cover |
| A1, A9, A11 | XVB7C61 | M12 Base Direct / Tube & Cover |
| A1, A10, A11 | XVB7C21M... | AC Base Direct / Tube & Cover |
| A2 | XVB7C9S... | 2 Tones Buzzer |
| A2 | XVB7C9T | 8 Tones Buzzer |
| A2 | XVB7C9SS | Self-Adjust Sounder 1 Tone |
| A3 | XVB7L2... | Beacon Steady Lens |
| | XVB7L6... | Beacon Flashing Lens |
| A4 | XVB7C9V | Editable Voice Alarm |
| A5 | XVB7C2... | Steady Lens |
| | XVB7C5... | Blinking Lens |
| | XVB7C6... | Flashing Lens |
| | XVB7CR... | Rotating Lens |
| | XVB7CM9 | Multi-function Clear lens |
| A12 | XVZ00 | 1/2" NPT Adapter |
| A13 | XVZ02... | Plastic Fixing Plate With Pole |
| A14 | XVZ100 | Alu Ø25mm Pole 100mm Length |
| A15 | XVZ250 | Alu Ø25mm Pole 250mm Length |
| A16 | XVZ400 | Alu Ø25mm Pole 400mm Length |
| A17 | XVZ800 | Alu Ø25mm Pole 800mm Length |
| A18 | XVZ100T | L Bracket Alu Ø25mm Pole 100mm |
| A19 | XVZ250T | L Bracket Alu Ø25mm Pole 250mm |
| A20 | XVZ01... | Plastic Fixing Plate |
| A21 | XVZ11 | Metal Fixing Plate |
| A22 | XVZ06... | Plastic Foldable Bracket |
| A23 | XVZ09 | Plastic Wall Mount Bracket |

| | | |
|-----|-------|--------------------|
| A24 | XVZ07 | Side Entry Adapter |
| A25 | XVZ08 | Magnetic Adapter |

Technical Illustration

Dimensions

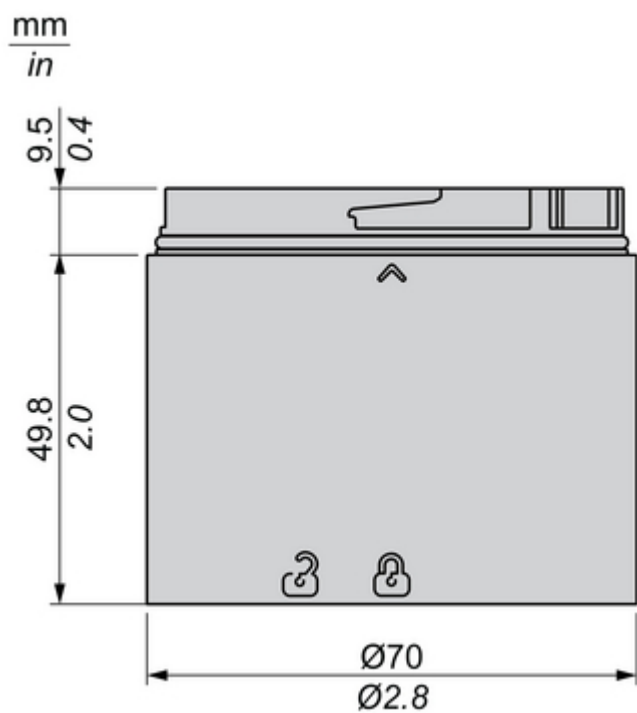

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XVB7

Conformity with IEC, CUL and CCC standards, as well as CE marking

Up to IP66 and type 4X protection ratings

High shock and vibration resistance up to 6g



Energy efficient LED with operating life up to 50,000 hours

Save up to 75% wiring time with M12 connection and push-in terminal

High brightness level with illuminance up to 3000cd/m²

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XVB7



Sustainability: high brightness with low power consumption realized via energy efficient LED



Elevated design with a modern twist to enhance machine aesthetic



Modular design for adaptability, ease of maintenance and low inventory



Wide base variety with the option to be connected via USB & IO-link base



Adjustable and customizable sounder with maximum sound pressure of up to 102dB

Image of product / Alternate images

Alternative

