




INDLINE G2 IP23

Indline G2 IP23 optimises your installation with new technology smart control solutions. With push-in terminals on both sides, you can easily use existing wiring without opening the fixture, making installation quick and easy. The well-thought-out design allows for replacement of both LEDs and drivers, which simplifies maintenance. Indline G2 IP23 features high efficiency, 12 kV surge protection, DIP-Switch Power and multiple control options – a flexible lighting solution for warehouses, industries and retail. Available in On/Off or DALI control options, or alternatively Casambi with or without PIR sensor. The luminaire is adapted for installation on a luminaire rail and has key holes for ceiling installation, including system ceilings. With integrated wire suspension with hook and hook lock for easy installation on wire.

- Large family of fluorescent tube replacements – perfect for your industrial environment
- Replaceable LED and driver
- Openable end caps for simple installation
- Installation method: rail, straight onto the ceiling, wall or wire
- Control the lighting via On/Off or DALI, or alternatively Casambi with or without PIR sensor
- Lifetime L80 100 000h Ta 25°C (DALI CLO L100 100 000h Ta 25°C)
- Lifetime driver 100 000h /10%


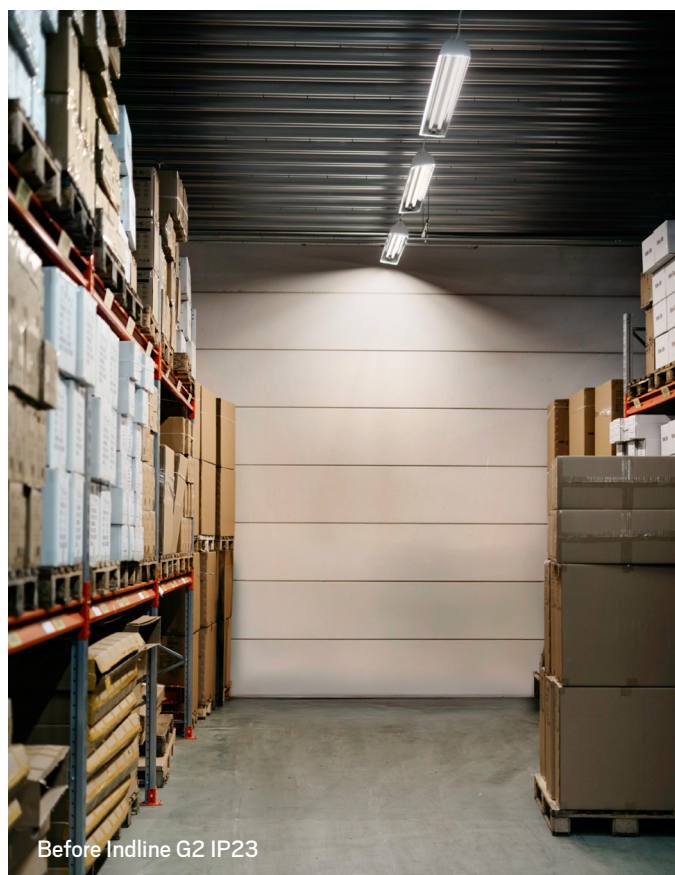




INDLIN G2 IP23

GTIN	Type	Color Temperature	Luminaire lumen	Beam angle	Effect luminaire
7392971151502	M 30°	4000K	10750-15250lm	30°	53-80W
7392971152134	M 60°	4000K	10200-14400lm	60°	53-80W
7392971152141	M 90°	4000K	9550-13500lm	90°	53-80W
7392971152158	M Asym	4000K	9700-12600lm	65°	53-80W
7392971152165	M 30° DALI CLO ¹⁾	4000K	15400lm	30°	80W
7392971152172	M 60° DALI CLO ¹⁾	4000K	15100lm	60°	80W
7392971152189	M 90° DALI CLO ¹⁾	4000K	13800lm	90°	80W
7392971152196	M Asym DALI CLO ¹⁾	4000K	12800lm	65°	80W
7392971152202	M 30° Casambi ²⁾	4000K	15400lm	30°	80W
7392971152219	M 60° Casambi ²⁾	4000K	15100lm	60°	80W
7392971152226	M 90° Casambi ²⁾	4000K	13800lm	90°	80W
7392971152820	M 30° Casambi PIR ²⁾	4000K	15400lm	30°	80W
7392971152837	M 60° Casambi PIR ²⁾	4000K	15100lm	60°	80W
7392971152844	M 90° Casambi PIR ²⁾	4000K	13800lm	90°	80W
7392971152233	L 30°	4000K	11050-19050lm	30°	55-97W
7392971152240	L 60°	4000K	10350-17800lm	60°	55-97W
7392971152257	L 90°	4000K	10150-17550lm	90°	55-97W
7392971152264	L Asym	4000K	10350-16350lm	65°	55-97W
7392971152271	L 30° DALI CLO ¹⁾	4000K	19750lm	30°	100W
7392971152288	L 60° DALI CLO ¹⁾	4000K	17700lm	60°	100W
7392971152295	L 90° DALI CLO ¹⁾	4000K	18250lm	90°	100W
7392971152301	L Asym DALI CLO ¹⁾	4000K	16850lm	65°	100W
7392971152318	L 30° Casambi ²⁾	4000K	19750lm	30°	100W
7392971152325	L 60° Casambi ²⁾	4000K	17700lm	60°	100W
7392971152332	L 90° Casambi ²⁾	4000K	18250lm	90°	100W
7392971152851	L 30° Casambi PIR ²⁾	4000K	19750lm	30°	100W
7392971152868	L 60° Casambi PIR ²⁾	4000K	17700lm	60°	100W
7392971152875	L 90° Casambi PIR ²⁾	4000K	18250lm	90°	100W
7392971152349	XL 30°	4000K	15750-23350lm	30°	81-125W
7392971152356	XL 60°	4000K	15450-23050lm	60°	81-125W
7392971152363	XL 90°	4000K	14550-21600lm	90°	81-125W
7392971152370	XL Asym	4000K	15450-20950lm	65°	81-125W
7392971152387	XL 30° DALI CLO ¹⁾	4000K	23700lm	30°	127W
7392971152394	XL 60° DALI CLO ¹⁾	4000K	22850lm	60°	127W
7392971152400	XL 90° DALI CLO ¹⁾	4000K	21750lm	90°	127W
7392971152417	XL Asym DALI CLO ¹⁾	4000K	21400lm	65°	127W
7392971152424	XL 30° Casambi ²⁾	4000K	23700lm	30°	127W
7392971152431	XL 60° Casambi ²⁾	4000K	22850lm	60°	127W
7392971152448	XL 90° Casambi ²⁾	4000K	21750lm	90°	127W
7392971152882	XL 30° Casambi PIR ²⁾	4000K	23700lm	30°	127W
7392971152899	XL 60° Casambi PIR ²⁾	4000K	22850lm	60°	127W
7392971152905	XL 90° Casambi PIR ²⁾	4000K	21750lm	90°	127W

²⁾ ¹⁾



PROTECTIVE GRID INDLIN G2

E-nr	Typ
7392971150840	Protection grid Indline G2 M
7392971150857	Protection grid Indline G2 L/XL



SYSTEM CEILING FIXING BRACKET

E-nr	Typ
7392971152783	Bracket System Ceiling Alu 2 pcs



SENSOR CASAMBI

E-nr	Typ
7392971152912	Sensor Casambi PIR 6-11m utp

