

Produktdatablad

Spesifikasjoner



SØLV FESTEPLATE FOR XVU

El-nummer: 4304106 XVUZ02Q

EAN: 3606480556029

Produktdata

Produktspekter	Harmony XVU
Produkt eller type komponent	Modular tower light
tilbehør / type del	Festeplate
Tilbehør / separat del kategori	Montering og innfesting tilbehør
Type komponent	XVU
Montasjediameter	60 mm

Teknisk data

pol høyde	100 mm
Montering	Plate with pole
kompatibilitet	Topp: AC body Topp: DC body Topp: swivel mounting support
materiale	PBT (polybutylene terephthalate) V-0 flammehemmende i samsvar med UL 94 ABS (Akrylnitril-Butadien-Styren) PC (polykarbonat) Aluminium
farge på kapsling	Sølv
Tilkoblinger	Push-in
[Us] matespenning	24 V AC/DC 110...240 V AC
Lengde	117 mm
Vekt	0,132 kg

Miljø

Omgivelsestemperatur for lagring	-40...70 °C
Omgivelsestemperatur drift	-25...50 °C
IP-grad	IP65
Produktsertifikater	CSA CE UL

Forpakkingsinformasjon

Enhets type pakke 1	PCE
Antall enheter i pakke 1	1
Pakke 1 Høyde	9,500 cm

Ansvarsfraskrivelse: Dokumentasjonen erstatter ikke opplysninger om produktene, og skal ikke brukes til å fastslå produktenes egnethet eller driftssikkerhet for bestemte bruksområder.

Pakke 1 Bredde	9,500 cm
Pakke 1 Vekt	26,800 cm
Package 1 Weight	293,000 g
Enhetsstype pakke 2	S03
Antall enheter i pakke 2	12
Pakke 2 Høyde	30,000 cm
Pakke 2 Bredde	30,000 cm
Pakke 2 Lengde	40,000 cm
Pakke 2 Vekt	4,249 kg

Logistikkinformasjon

Opprinnelsesland	ID
------------------	----

Garantiperiode

Garanti	18 måneder
---------	------------

Environmental Data

Schneider Electric tar sikte på å oppnå Net Zero-status innen 2050 gjennom partnerskap med leverandørkjeden, materialer med lavere slagkraft og sirkularitet via vår pågående "Use Better, Use Longer, Use Again"-kampanje for å forlenge produktlevetiden og resirkulerbarheten.

Environmental Data forklart >

Hvordan vi vurderer produktets bærekraft >

Miljøfotavtrykk	
Samlet klimagassutslipp gjennom livsløpet	3
PEP (Product Environmental Profile)	Produktmiljøprofil

Use Better

Materialer og emballasje	
Emballasje med resirkulert papp	Ja
Emballasje uten plast	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)
SCIP-nummer	C06fce4f-aea2-46a5-aadb-0b38d1efbe3f


Use Again

Ompakking og reproduksjon	
Produktets livssyklus	Informasjon om levetidsslutt
Tilbaketakning	No

Dimensions Drawings


Fixing Unit - Plate with Pole

Dimensions

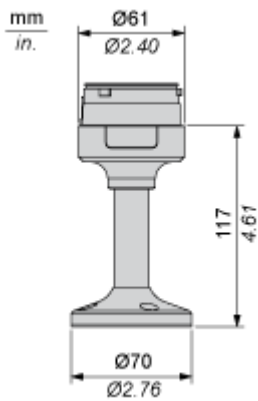

Mounting and Clearance

Modular Tower Lights Mounting

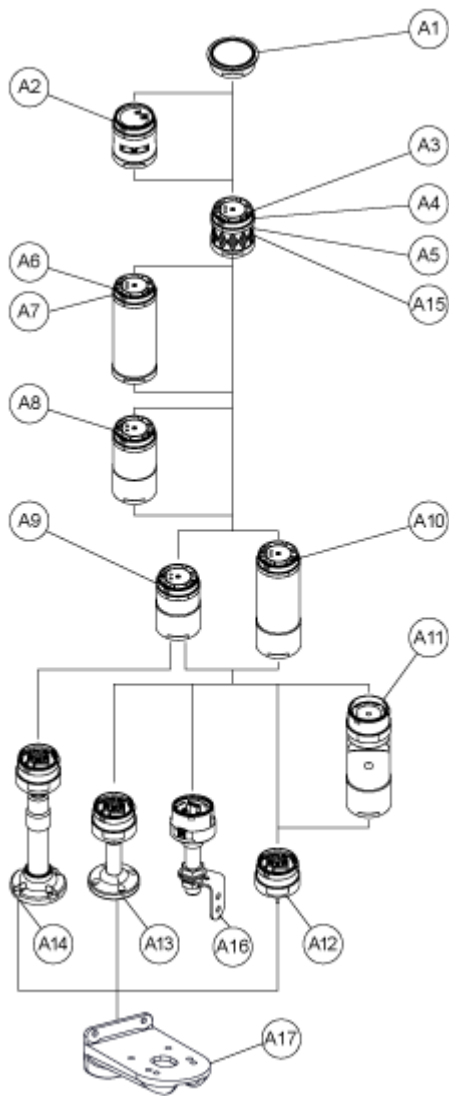


Drawing	Part number	Part name
A1	-	Top cover
	-	Top cover (Silver)
A2	XVUC9S	Buzzer unit
	XVUC9SQ	Buzzer unit (Silver)
A3	XVUC23	Green LED unit
	XVUC24	Red LED unit
	XVUC25	Orange LED unit
	XVUC26	Blue LED unit

Drawing	Part number	Part name
	XVUC27	White LED unit
	XVUC28	Yellow LED unit
A4	XVUC29	Multi-LED unit
A5	XVUC29P	Multi-LED unit, Pulse signal
A6	XVUC9V	Sound unit
A7	XVUC9VP	Sound unit, Pulse signal
A8	XVUC020	Extender
	XVUC020Q	Extender (Silver)
A9	XVUC21B	DC body
	XVUC21BQ	DC body (Silver)
A10	XVUC21M	AC body NPN
	XVUC21MP	AC body PNP
	XVUC21MQP	AC body PNP (Silver)
A11	XVUZ06	Flexible option
A12	XVUZ01	Fixing Unit - Direct mounting (3 pins)
	XVUZ01Q	Fixing Unit - Direct mounting (Silver,3 pins)
	XVUZ03	Fixing Unit - Direct mounting (2 pins)
	XVUZ04	Fixing Unit - Direct mounting (4 pins)
A13	XVUZ02	Fixing Unit - Plate with Pole (100 mm)
	XVUZ02Q	Fixing Unit - Plate with Pole (100 mm, Silver)
	XVUZ400	Fixing Unit - Plate with Pole (400 mm)
	XVUZ800	Fixing Unit - Plate with Pole (800 mm)
A14	XVUZ05	Fixing Unit - Plate with adjustment pole (100-385 mm)
A15	XVUC43	Green LED unit, Flash
	XVUC44	Red LED unit, Flash
	XVUC45	Orange LED unit, Flash
	XVUC46	Blue LED unit, Flash

Drawing	Part number	Part name
	XVUC47	White LED unit, Flash
	XVUC48	Yellow LED unit, Flash
A16	XVUZ100T	Fixing Unit - Metal bracket with pole (100 mm)
	XVUZ250T	Fixing Unit - Metal bracket with pole(250 mm)
	XVUZ400T	Fixing Unit - Metal bracket with pole (400 mm)
A17	XVUZ12	Fixing plate for use on vertical support - black


Modular Tower Lights Mounting

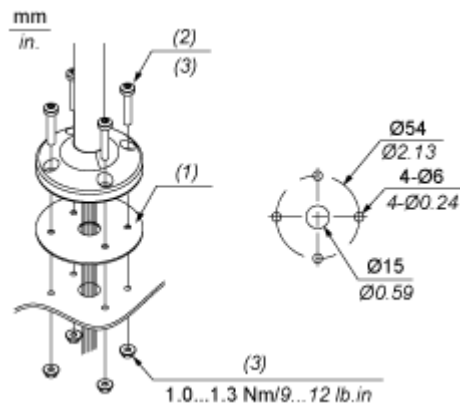

- (1) Gasket
- (2) Screw x 4 (unattached)
- (3) M5 x (thickness+10 mm / 0.39 in.)

Connections and Schema


Illuminated Units, Multi-LED and Audible Units Wiring

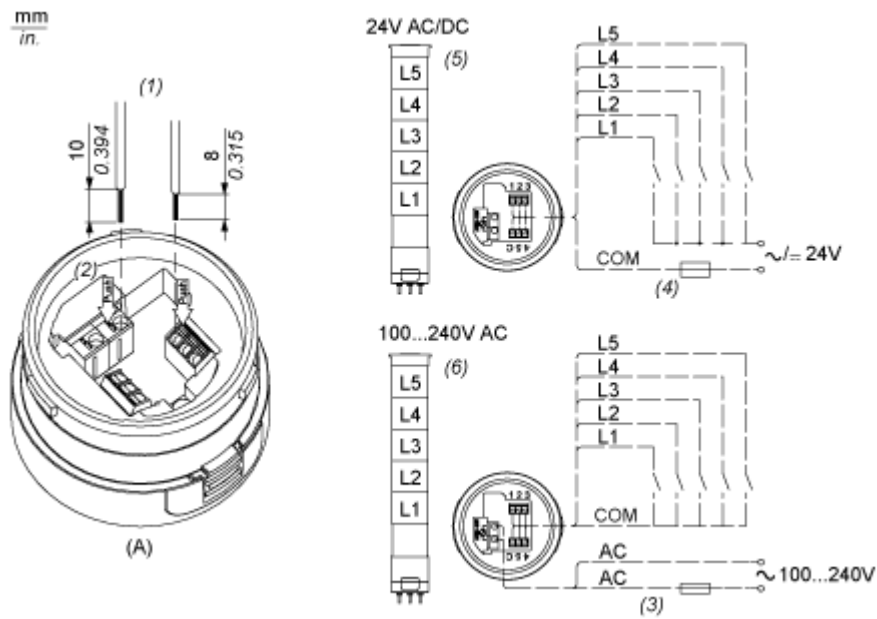

- (A) Fixing Unit
 - (1) Dimensions of Wiring size
 - (2) Push-in Wire Connectors
 - (3) Fuse : 2A ,250V
 - (4) Fuse : 0.5A ,125V
 - (5) Modular Tower Lights 24V AC/DC
 - (6) Modular Tower Lights 100...240V AC
- L1 to L5 : Illuminated LED Units


Technical Illustration

Dimensions

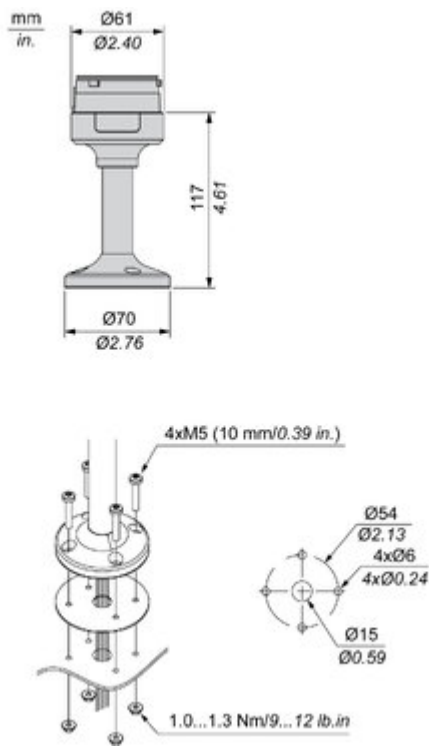


Technical Illustration

Wiring diagram

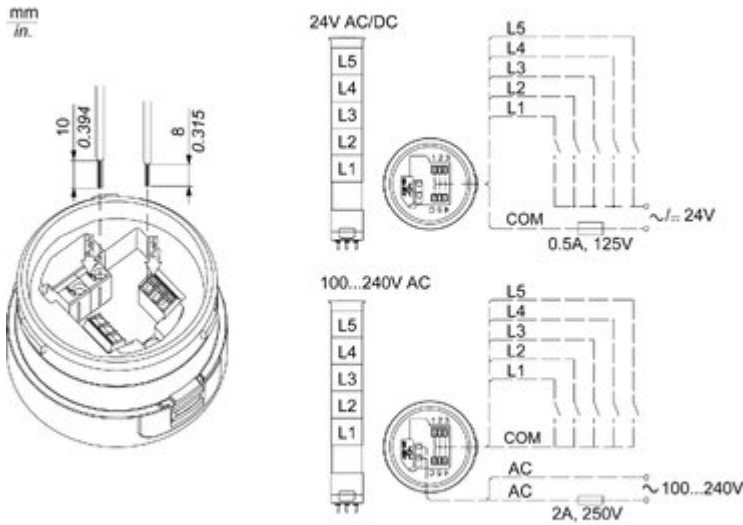

Offer Marketing Illustration

Product benefits / Features

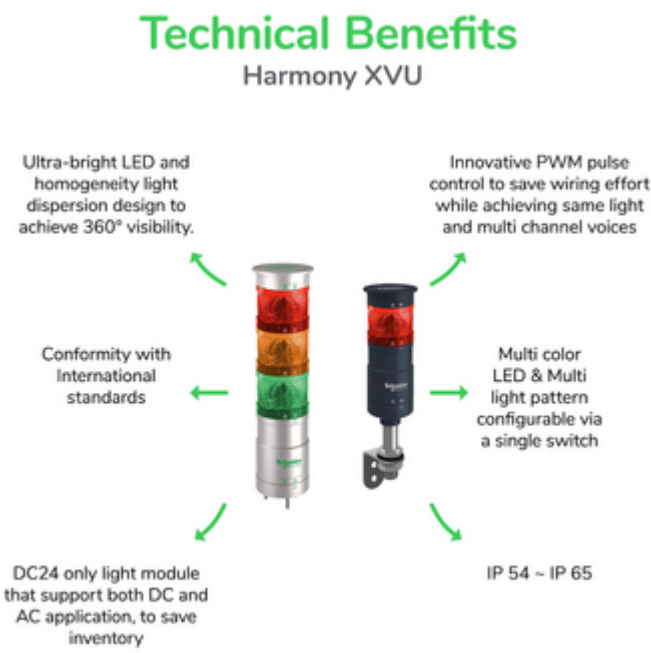

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XVU



6 colors + multi color LED with 4 light patterns: steady, flashing, blinking, and rotating



4 mounting styles: flexible, wall, pole, or direct mounting



Programmable sounders that is configurable via the SD card



Modular design supporting customization up to 5 light units



Simplified installation, easy maintenance, and direct connection to PLC



Image of product / Alternate images

Alternative



