

Spesifikasjoner



El-nummer:

4303931

ZB5AV6

EAN: 3389110908282

Produktspekter	Harmony XB5
Produkt eller type komponent	Komplett kropp-/lysblokkmontering
Kortnavn på utstyr	ZB5
festebraкетtmateriale	Plast
Salg per udelelig kvantitet	1
tilkoblingsklemmer	Skrutilkobling, <= 2 x 1,5 mm² med endehylse i samsvar med IEC 60947-1 Skrutilkobling, > = 1 x 0,22 mm² uten endehylse i samsvar med IEC 60947-1
Lyskilde	Pære ikke inkludert
Lyspære sokkel	BA 9s
lysblokkforsyning	Direkte <2,4 W

Bredde	30 mm
Høyde	42 mm
Dybde	32 mm
Klemmebeskrivelse ISO n°1	(X1-X2)PL
Vekt	0,022 kg
Tiltrekningsmoment	0,8...1,2 N.m i samsvar med IEC 60947-1
formen på skruehodet	Kryss kompatibel med Philips no 1 skrutrekker Kryss kompatibel med Pozidriv No 1 skrutrekker Hullet kompatibel med flat Ø 4 mm skrutrekker Hullet kompatibel med flat Ø 5.5 mm skrutrekker
[Ui] isolasjonsspenning	600 V (forurensningsgrad 3) i samsvar med IEC 60947-1
[Uimp] Nominell impuls ­ spenning	6 kV i samsvar med IEC 60947-1
Signaltype	Klar
[Us] merkespenning	<= 250 V
Enhetens utseende	Basic sub-assemblies

Overflatebeskyttelse	TH
Omgivelsestemperatur for lagring	-40...70 °C
Omgivelsestemperatur drift	-40...70 °C
beskyttelsesgrad mot elektrisk støt	Klasse II conforming to IEC 60536

Standarder	IEC 60947-5-1 CSA C22.2 No 14 IEC 60947-1 IEC 60947-5-4 JIS C8201-5-1 UL 508 JIS C8201-1
Produktsertifikater	CSA DNV BV LROS (Lloyds register of shipping) UL listet
Vibrasjonsmotstand	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
støtmotstand	30 gn (varighet = 18 ms) for halvsinuskurve akselerasjon i samsvar med IEC 60068-2-27 50 gn (varighet = 11 ms) for halvsinuskurve akselerasjon i samsvar med IEC 60068-2-27

Forpakkingsinformasjon

Enhetsstype pakke 1	PCE
Antall enheter i pakke 1	1
Pakke 1 Høyde	4,500 cm
Pakke 1 Bredde	3,400 cm
Pakke 1 Vekt	5,400 cm
Package 1 Weight	20,000 g
Enhetsstype pakke 2	S03
Antall enheter i pakke 2	300
Pakke 2 Høyde	30,000 cm
Pakke 2 Bredde	30,000 cm
Pakke 2 Lengde	40,000 cm
Pakke 2 Vekt	6,326 kg
Enhetsstype pakke 3	P06
Antall enheter i pakke 3	2400
Pakke 3 Høyde	75,000 cm
Pakke 3 Bredde	60,000 cm
Pakke 3 Lengde	80,000 cm
Pakke 3 Vekt	61,500 kg

Logistikkinformasjon

Opprinnelsesland	FR
------------------	----

Garantiperiode

Garanti	18 months
---------	-----------

Environmental Data

Schneider Electric tar sikte på å oppnå Net Zero-status innen 2050 gjennom partnerskap med leverandørkjeden, materialer med lavere slagkraft og sirkularitet via vår pågående "Use Better, Use Longer, Use Again"-kampanje for å forlenge produktlevetiden og resirkulerbarheten.

[Environmental Data forklart >](#)

[Hvordan vi vurderer produktets bærekraft >](#)

 Miljøfotavtrykk	
Samlet klimagassutslipp gjennom livsløpet	32
PEP (Product Environmental Profile)	Produktmiljøprofil

Use Better


 Materialer og emballasje	
Emballasje med resirkulert papp	Ja
Emballasje uten plast	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)
SCIP-nummer	E148b25a-d37b-4237-bc1f-74823046728d

Use Again

 Ompakking og reproduksjon	
Produktets livssyklus	Informasjon om levetidsslutt
Tilbaketakning	No
WEEE Label	 Innen EU må produktet avhendes i henhold til bestemte regler for avfallshåndtering og aldri kastes som husholdningsavfall.

Dimensions Drawings

Dimensions



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
(3) Ø22.5 mm recommended ($\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in. } \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess

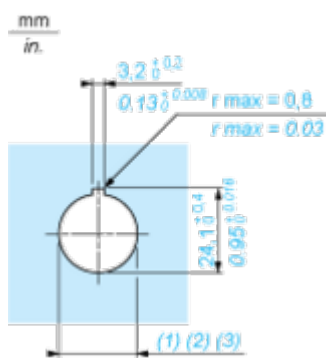

- (1) Diameter on finished panel or support
(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
(3) Ø22.5 mm recommended ($\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in. } \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$)

Technical Illustration

Dimensions

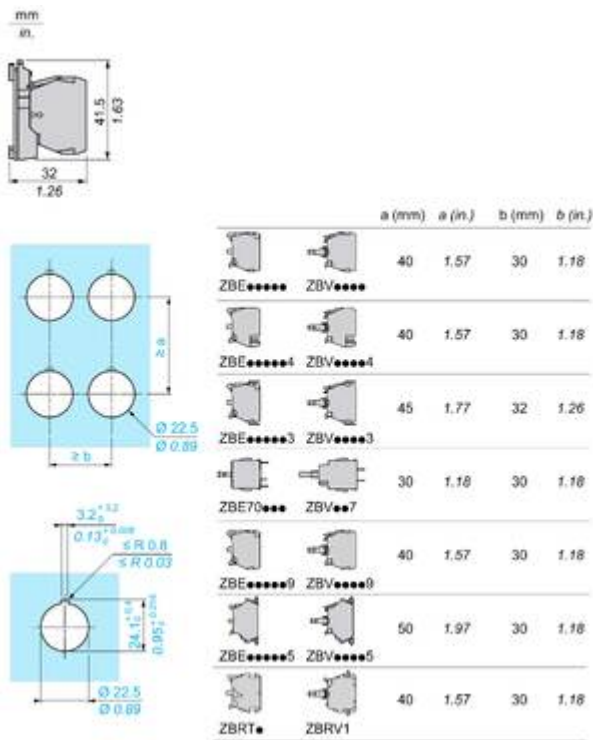

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB4/XB5 Illuminated functions



NEW universal LED Block for all colors





Simple stock management





Improved installation time and easy selection





Improved color intensity and brightness



20. sep. 2025

Life Is On | Schneider Electric

7

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB5



Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB5



Quick and easy assembly and disassembly



Excellent mechanical connection with operator head



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Robustness to withstand harsh environments



Large set of accessories to customize your panels



Image of product / Alternate images

Alternative





