

Produktdatablad

Spesifikasjoner



Grunnmodul bunn+topp

El-nummer:
4308149 XVMC21

EAN: 3389119004299

Produktdata

Produktspekter	Harmony XVM
Produkt eller type komponent	Base unit with cover
Sammensetning	Deksel Base enhet
Type komponent	XVM
indikator bank basen typen	Base without buzzer

Teknisk data

Montasjediometer	45 mm
farge på kapsling	Hvit
Tilkoblingsklemmer	Skrulklemmer, 1 x 0.325...1 x 1.5 mm ²
Merking	CE
Vekt	0,055 kg

Miljø

Standarder	IEC 60947-5-1 IEC 60947-1
Produktsertifikater	CCC
Omgivelsestemperatur for lagring	-25...70 °C
Omgivelsestemperatur drift	-10...50 °C
beskyttelsesgrad mot elektrisk støt	Klasse I aluminium tube mounting i samsvar med IEC 60947-1 Klasse I aluminium tube mounting i samsvar med IEC 60947-5-1 Klasse I aluminium tube mounting i samsvar med IEC 61140
IP-grad	IP40 enhver posisjon utenom vertikal posisjon i samsvar med IEC 60529 IP42 vertikal posisjon i samsvar med IEC 60529
Overflatebeskyttelse	TC

Forpakkingsinformasjon

Enhetsstype pakke 1	PCE
Antall enheter i pakke 1	1
Pakke 1 Høyde	5,700 cm
Pakke 1 Bredde	6,300 cm
Pakke 1 Vekt	9,700 cm
Package 1 Weight	61,000 g

Ansvarsfraskrivelse: Dokumentasjonen erstatter ikke opplysninger om produktene, og skal ikke brukes til å fastslå produktenes egnethet eller driftssikkerhet for bestemte bruksområder.

Enhetstype pakke 2	S01
Antall enheter i pakke 2	21
Pakke 2 Høyde	15,000 cm
Pakke 2 Bredde	15,000 cm
Pakke 2 Lengde	40,000 cm
Pakke 2 Vekt	1,556 kg

Logistikkinformasjon

Opprinnelsesland	ID
------------------	----

Garantiperiode

Garanti	18 months
---------	-----------

Environmental Data

Schneider Electric tar sikte på å oppnå Net Zero-status innen 2050 gjennom partnerskap med leverandørkjeden, materialer med lavere slagkraft og sirkularitet via vår pågående "Use Better, Use Longer, Use Again"-kampanje for å forlenge produktlevetiden og resirkulerbarheten.

Environmental Data forklart >

Hvordan vi vurderer produktets bærekraft >

Miljøfotavtrykk	
Samlet klimagassutslipp gjennom livsløpet	1
PEP (Product Environmental Profile)	Produktmiljøprofil

Use Better

Materialer og emballasje	
Emballasje med resirkulert papp	Ja
Emballasje uten plast	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)
SCIP-nummer	6797f094-b2bf-48a4-981a-58794615fad0

Use Again


Ompakking og reproduksjon	
Produktets livssyklus	Ingen behov for spesifikke resirkuleringsprosedyrer
Tilbaketakning	No

Dimensions Drawings

Customer Assembled Tower Light

Dimensions

Below drawing shows a tower light with 3 illuminated stages. Select the number of stages according to the product characteristics in order to get **b** dimension.

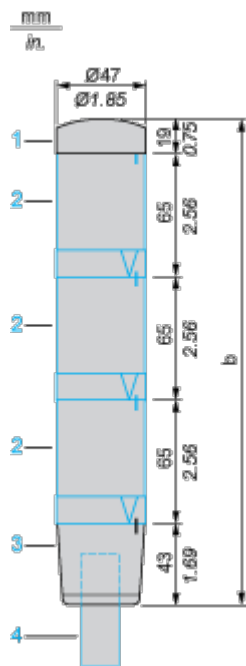


- (1) Cover (included with base unit)
- (2) Illuminated unit, to be ordered separately
- (3) Base unit
- (4) Fixing base XVMZ0•/Z0•T, to be ordered separately

Number of illuminated units (ref. 2)	b in mm	b in in.
1	127	5.00
2	192	7.56
3	257	10.12
4	322	12.68
5	387	15.24

Connections and Schema

Customer Assembled Tower Light

Wiring Diagram

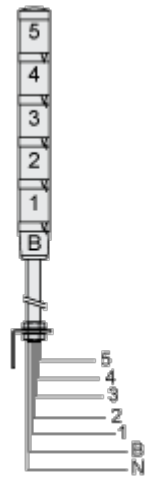

Indicator bank with buzzer (4 illuminated units max.):

- 4: 4th illuminated unit
- 3: 3rd illuminated unit
- 2: 2nd illuminated unit
- 1: 1st illuminated unit
- N: Common
- B: Buzzer

Indicator bank without buzzer:


- 5: 5th illuminated unit
- 4: 4th illuminated unit
- 3: 3rd illuminated unit
- 2: 2nd illuminated unit
- 1: 1st illuminated unit
- N: Common

Maximum capacity for wiring through support tube:

- 6 wires x 1 mm²/16 AWG,
- 5 wires x 1.5 mm²/14 AWG

Technical Illustration

Dimensions

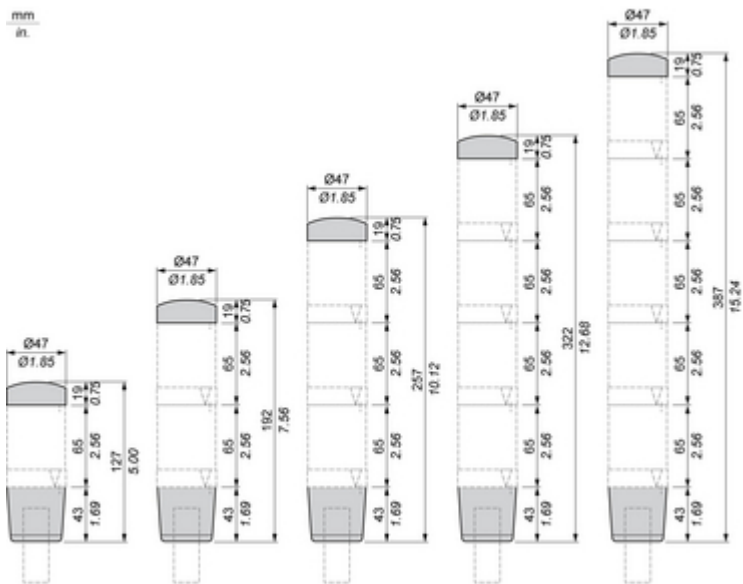

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XVM

Compact 45mm diameter with enough features to cover most of the applications



Modular for easy customized and monolithic with pre-assembled and pre-wired ease the installation and selection effort

These illuminated units incorporate base that can be fitted with an incandescent bulb, a "Super Bright" LED, or a "flash" discharge tube.



Adjustable Buzzer unit(85dB) integrated in the based unit, 2 types of selection sound and volume

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XVM



Signaling for medium distances



Available in complete or separate units for customer assembly



Three types of mounting adapted to your needs: direct plastic fixing plate, support tube with metal bracket or with plastic fixing plate



Composition of 1, 2, 3 & 4 illuminated units, with or without buzzer, with fixing system for horizontal or vertical mounting



Image of product / Alternate images

Alternative





