

Prelude Square



Prelude Square Sort 1490lm 2700K Faseavsnitt

El-nummer: 3309230
EAN: 7021981113889
SG artikkelnr: 111388



Elektrisk

System effekt (W): 16W
Spennings: 220-240V
Frekvens (Hz): 50/60Hz

Lysteknikk

Type lyskilde: LED
Effektiv lysstrøm (lm): 1490lm
Lysutbytte: 93 lm/W
Farge temperatur: 2700K
Lysstråling: Direkte
Optikk: Akryl diffuser

Styring

Styring: Faseavsnitt

Beskyttelse

Isolasjonsklasse: Klasse II
IK Klasse: IK05
IP Klasse: IP44 (horisontalt montert) / IP40 (vertikal montert)

Energi og godkjenning

Breem: Oppfyller Hea 01 krav til flimmerfri belysning (In-Use: Hea 05)

Materialer og overflater

Materiale: Aluminium
Farge: Sort RAL 9004
Avskjermings materiale: Akryl (PMMA)

Montering/Tilkobling



Montering: Utenpåliggende, Innendørs
Tilkobling: Hurtigklemme

Dimensjoner

Bredde (mm) W: 519
Høyde (mm) H: 59
Dybde (D): 62
Vekt (kg) brutto/netto: 0.898 / 0.799

Forpakning

Forpakningsstørrelse (mm): 528 x 65 x 65

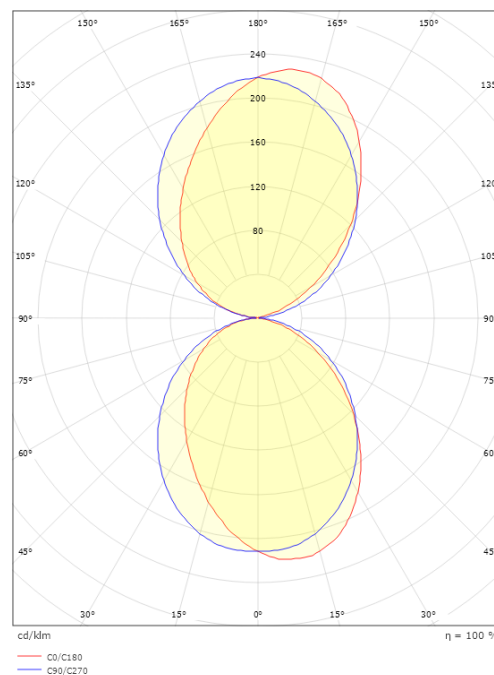

7 0 2 1 9 8 1 1 1 3 8 8 9