


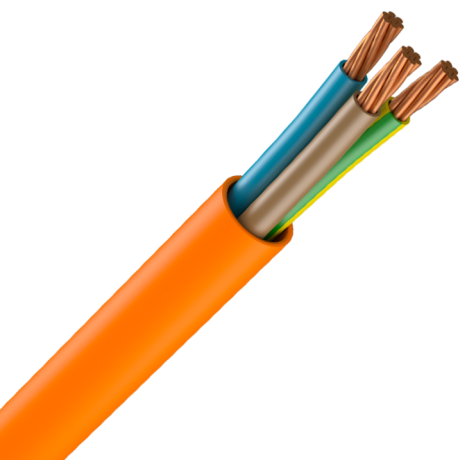

CONTACT

Market information
industryprojects.business@lynxéo
ogroup.com

FIRE RESISTANT POWER CABLES

STANDARDS

Product IEC 60228

Installation IEC 60092-350; IEC 60092-353; IEC 60092-360

Test IEC 60331-1 or 2; IEC 60332-1; IEC 60332-3-22; IEC 60754-1; IEC 60754-2; IEC 61034

APPLICATION

MPRX®331 0.6/1 kV fire resistant power and control cables maintain circuit integrity in case of fire by meeting performances requirements from the IEC 60331 series for 180 minutes. They are used for detection and warning systems not subject to mechanical risks.

The highly flexible MPRX®331 FLEXISHIP® range is recommended for installations and connections in narrow spaces where an optimal bending radius is required. Designed with halogen-free fire retardant materials, they provide optimum safety for people and maximal asset protection against all risks of fire.

Design

1. Conductor

Stranded bare copper, class 2 or class 5 for FLEXISHIP®

2. Insulation

Mica tape + XLPE (cross-linked polyethylene)

3. Outer sheath

(Filler if necessary)
Polyolefin SHF1
Colour: orange

Example of marking:

LYNXEO 279 MPRX 331 or MPRX 331 FLEXISHIP 0.6/1 kV "n" x (orG) "s" 90°C IEC 60092-353 IEC 60332-3-22 Cat. A IEC 60331-1/21 "ww/yy" * CE* + metric marking

Core Identification

1 x: black

2 x: brown-blue

3 x: brown-black-grey

3G: brown-blue-green/yellow

4 x: brown-black-grey-blue

4G: brown-black-grey-green/yellow

> 5 cores: n x: white with printed numbers / nG: white with printed numbers + green/yellow core



Halogen free
IEC 60754-1



Rated Voltage U₀/U
(Um)
0.6/1 (1.2) kV



Fire resistant
IEC 60331-1 or -2



Fire retardant
EN IEC 60332-3-22
(cat A)



Smoke density
IEC 61034



Gases corrosivity
IEC 60754-2



Operating temp.
-30 ... 80 °C



Max. conductor
temp. in service
90 °C

CHARACTERISTICS

Construction characteristics

Halogen free	IEC 60754-1
--------------	-------------

Electrical characteristics

Rated Voltage U ₀ /U (U _m)	0.6/ 1 (1.2) kV
---	-----------------

Usage characteristics

Fire resistant	IEC 60331-1 or -2
Fire retardant	EN IEC 60332-3-22 (cat A)
Smoke density	IEC 61034
Gases corrosivity	IEC 60754-2
Operating temperature, range	-30 ... 80 °C
Max. conductor temperature in service	90 °C

MPRX® 331

Reference	Nb. of cores	Cross section [mm²]	Green/ Yellow core	Min. outer diam. [mm]	Nom. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]
10171706	2	1.5	No	10.0	10.7	11.5	97
10281202	2	2.5	No	10.6	11.3	12.2	117
10171708	3	1.5	No	10.6	11.3	12.2	127
10171707	3	1.5	Yes	10.6	11.4	12.2	127
10282800	4	1.5	Yes	11.6	12.4	13.3	158
10282796	4	2.5	Yes	12.2	13.1	14.0	198

MPRX® FLEXISHIP® 331

Reference	Nb. of cores	Cross section [mm²]	Green/ Yellow core	Min. outer diam. [mm]	Nom. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]
10284390	1	35	No	12.5	13.4	14.4	400
	1	50	No	13.5	14.0	15.5	540
	1	70	No	15.5	16.1	17.5	740
10240115	1	95	No	17.6	18.9	20.3	967
10269961	1	120	No	19.7	21.2	22.6	1224
	1	150	No	21.5	22.4	24.5	1500
10269962	1	185	No	23.6	25.4	27.1	1820
	1	240	No	27.5	28.4	30.5	2410
10282799	2	4	No	11.6	12.4	13.3	156



Halogen free
IEC 60754-1



Rated Voltage U₀/U (U_m)
0.6/ 1 (1.2) kV



Fire resistant
IEC 60331-1 or -2



Fire retardant
EN IEC 60332-3-22 (cat A)



Smoke density
IEC 61034



Gases corrosivity
IEC 60754-2



Operating temp.
-30 ... 80 °C



Max. conductor temp. in service
90 °C

Reference	Nb. of cores	Cross section [mm²]	Green/ Yellow core	Min. outer diam. [mm]	Nom. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]
10284307	2	6	No	13.2	14.1	15.1	210
10283957	2	10	No	14.9	16.0	17.1	353
10281369	2	16	No	16.6	17.9	19.2	421
	2	35	No	22.0	23.0	25.0	1140
	2	50	No	26.5	27.4	29.5	1600
10284310	3	4	No	12.6	13.6	14.5	215
10283239	3	16	No	17.8	19.1	20.4	637
10283238	3	25	No	21.6	23.2	24.8	979
10265187	3	35	No	25.1	27.0	28.9	1329
10283237	3	50	No	27.9	30.0	32.1	1802
10253643	3	70	No	32.8	35.3	37.8	2597
10219022	3	95	No	36.5	39.2	41.9	3198
10235004	3	120	No	41.0	44.1	47.2	4041
10283956	4	10	Yes	17.9	19.3	20.7	607
	4	16	No	18.5	18.6	21.0	840
10284360	4	25	No	24.3	26.1	27.9	1199
10235005	4	35	No	28.0	30.1	32.2	1724
10171161	4	50	No	31.1	33.4	35.7	2345
10235006	4	70	No	36.7	39.5	42.3	3283
10284311	5	6	Yes	17.7	19.0	20.3	498
10282797	5	10	Yes	19.4	20.8	22.3	713



Halogen free
IEC 60754-1



Rated Voltage U_0/U
(Um)
0.6/1 (1.2) kV



Fire resistant
IEC 60331-1 or -2



Fire retardant
EN IEC 60332-3-22
(cat A)



Smoke density
IEC 61034



Gases corrosivity
IEC 60754-2



Operating temp.
-30 ... 80 °C



Max. conductor
temp. in service
90 °C