


# ACTOR G2 PENDANT

Actor G2 Pendant is a suspended interior luminaire designed for easy installation and high visual comfort. Available in white or black powder-coated aluminium, it suits any modern environment. The suspension kit allows you to adjust the height effortlessly, and the built-in DIP switch lets you set both light distribution and colour temperature directly on site—quickly, precisely and without tools. No need to decide everything in advance; the light can be adjusted once the installation is complete. The design is modular, meaning you only replace the needed part—not the entire luminaire. It can be installed as a single unit or linked into long light lines. Choose between up/down light distribution of 30/70 or 50/50, depending on whether you want more work light downwards or ambient light upwards. Select between opal, microprismatic or double parabolic glare shields. The double parabolic version meets screen and UGR requirements (UGR<19 for offices) under standard conditions. Delivered complete with ceiling mounting accessories, earthed cable set or 5-pole ALI cable with open ends.






- **Complete pendant luminaire** for focused lighting – ideal for offices, meeting rooms and classrooms
- **Flexible light settings via DIP switch** – choose 3000K/4000K and adjust light distribution 30/70 or 50/50
- **Visual comfort with selectable glare control:** – opal, microprismatic or double parabolic (DP meets screen and UGR requirements, UGR<19 under standard conditions)
- Service-friendly design – built for the future, with **replaceable LED and driver**
- **Easily link** up to 15 luminaires (5 for Casambi), create light lines and patterns
- Simple height adjustment with **suspension kit**
- **Choose your preferred control option:** pull cord, DALI, sensor, sensor with Casambi
- Color rendering: **Ra>90**
- Efficiency up to **150 lm/W**
- Lifespan: L80 **100.000h**, L100 **100.000h** CLO LED and driver

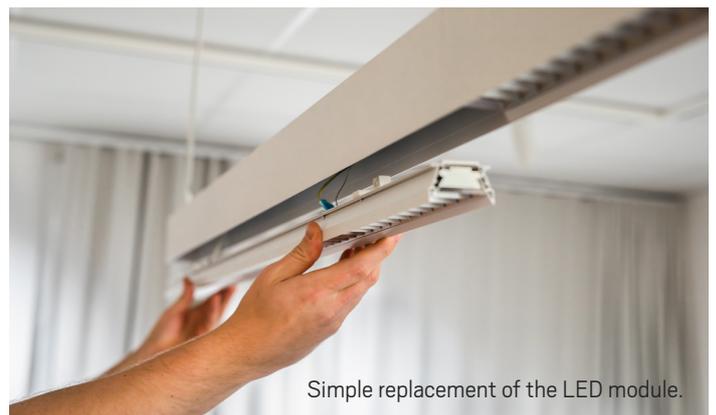



## ACTOR G2 PENDANT



GTIN	Type	Color Temperature	Luminaire lumen	Luminaire efficiency	Effect luminaire
7392971154541	DP White DIM I	3000K/4000K	5000-5550lm	136lm/W	41W
7392971154558	DP White DIM II	3000K/4000K	5050-5650lm	134lm/W	41W
7392971154565	DP White DIM I PIR	3000K/4000K	5200-5800lm	141lm/W	41-49W
7392971154572	DP White PIR	3000K/4000K	5200-5800lm	141lm/W	41-49W
7392971154589	DP White Casambi PIR	3000K/4000K	5200-5800lm	141lm/W	41-49W
7392971154596	DP White DALI CLO	3000K/4000K	5200-5800lm	141lm/W	41-49W
7392971154602	DP White DIM I LINK	3000K/4000K	5000-5550lm	136lm/W	41W
7392971154374	DP White DIM II LINK	3000K/4000K	5050-5650lm	136lm/W	41W
7392971154619	DP White DALI/PIR LINK	3000K/4000K	5200-5800lm	141lm/W	41-49W
7392971154626	DP Black DIM I	3000K/4000K	4520-5150lm	126lm/W	41W
7392971154633	DP Black DIM II	3000K/4000K	4830-5250lm	136lm/W	41W
7392971154640	DP Black DIM I PIR	3000K/4000K	4580-5350lm	130lm/W	41-49W
7392971154657	DP Black PIR	3000K/4000K	4580-5350lm	130lm/W	41-49W
7392971154664	DP Black Casambi PIR	3000K/4000K	4580-5350lm	130lm/W	41-49W
7392971154671	DP Black DALI CLO	3000K/4000K	4580-5350lm	130lm/W	41-49W
7392971154688	DP Black DIM I LINK	3000K/4000K	4520-5150lm	126lm/W	41W
7392971154381	DP Black DIM II LINK	3000K/4000K	4830-5250lm	134lm/W	41W
7392971154695	DP Black DALI/PIR LINK	3000K/4000K	4580-5350lm	130lm/W	41-49W
7392971154701	MP White DIM I	3000K/4000K	5350-5850lm	148lm/W	41W
7392971154718	MP White DIM II	3000K/4000K	5300-5800lm	148lm/W	41W
7392971154725	MP White DIM I PIR	3000K/4000K	5600-6100lm	148lm/W	41-49W
7392971154732	MP White PIR	3000K/4000K	5600-6100lm	148lm/W	41-49W
7392971154749	MP White Casambi PIR	3000K/4000K	5600-6100lm	148lm/W	41-49W
7392971154756	MP White DALI CLO	3000K/4000K	5600-6100lm	148lm/W	41-49W
7392971154763	MP White DIM I LINK	3000K/4000K	5350-5850lm	148lm/W	41W
7392971154398	MP White DIM II LINK	3000K/4000K	5300-5800lm	148lm/W	41W
7392971154770	MP White DALI/PIR LINK	3000K/4000K	5600-6100lm	148lm/W	41-49W
7392971154787	MP Black DIM I	3000K/4000K	4840-5400lm	131lm/W	41W
7392971154794	MP Black DIM II	3000K/4000K	5000-5700lm	139lm/W	41W
7392971154800	MP Black DIM I PIR	3000K/4000K	4960-5600lm	136lm/W	41-49W
7392971154817	MP Black PIR	3000K/4000K	4960-5600lm	136lm/W	41-49W
7392971154824	MP Black Casambi PIR	3000K/4000K	4960-5600lm	136lm/W	41-49W
7392971154831	MP Black DALI CLO	3000K/4000K	4960-5600lm	136lm/W	41-49W
7392971154848	MP Black DIM I LINK	3000K/4000K	4840-5400lm	131lm/W	41W
7392971154404	MP Black DIM II LINK	3000K/4000K	5000-5700lm	139lm/W	41W
7392971154855	MP Black DALI/PIR LINK	3000K/4000K	4960-5600lm	136lm/W	41-49W
7392971154862	OP White DIM I	3000K/4000K	5500-5950lm	145lm/W	41W
7392971154879	OP White DIM II	3000K/4000K	5450-5900lm	144lm/W	41W
7392971154886	OP White DIM I PIR	3000K/4000K	5700-6150lm	150lm/W	41-49W
7392971154893	OP White PIR	3000K/4000K	5700-6150lm	150lm/W	41-49W
7392971154909	OP White Casambi PIR	3000K/4000K	5700-6150lm	150lm/W	41-49W
7392971154916	OP White DALI CLO	3000K/4000K	5700-6150lm	150lm/W	41-49W
7392971154923	OP White DIM I LINK	3000K/4000K	5500-5950lm	145lm/W	41W
7392971154411	OP White DIM II LINK	3000K/4000K	5450-5900lm	144lm/W	41W
7392971154930	OP White DALI/PIR LINK	3000K/4000K	5700-6150lm	150lm/W	41-49W
7392971154947	OP Black DIM I	3000K/4000K	5050-5550lm	135lm/W	41W
7392971154954	OP Black DIM II	3000K/4000K	5200-5800lm	141lm/W	41W
7392971154961	OP Black DIM I PIR	3000K/4000K	5250-5750lm	140lm/W	41-49W
7392971154978	OP Black PIR	3000K/4000K	5250-5750lm	140lm/W	41-49W
7392971154985	OP Black Casambi PIR	3000K/4000K	5250-5750lm	140lm/W	41-49W
7392971154992	OP Black DALI CLO	3000K/4000K	5250-5750lm	140lm/W	41-49W
7392971155005	OP Black DIM I LINK	3000K/4000K	5050-5550lm	135lm/W	41W
7392971154428	OP Black DIM II LINK	3000K/4000K	5200-5800lm	141lm/W	41W
7392971155012	OP Black DALI/PIR LINK	3000K/4000K	5250-5750lm	140lm/W	41-49W



DIM I = one pull cord, DIM II = two pull cords.