


Adapter cable

Item No.: 771-5001/151-000



Adapter cable

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	771-5001/151-000
GTIN / EAN	4055143261227
Content	1
Order amount	1
Customer item number	

Notes

All WINSTA® components are 100% protected against mismatching in terms of: a.) plugging different number of poles b.) plugging when turned by 180° c.) plugging when laterally staggered d.) plugging one pole

Note on Continuous Service Temperature: -35 °C ... +85 °C
PVC cable for temperatures 70 °C (including halogen-free)
Insulating parts for temperatures 105 °C
Mating cycles: 100, with resistive load $I_N = 25A$, tested (4 mm²/AWG 12)

Technical data


Miscellaneous

Pin spacing	10 mm / 0.394 in
Color	blue
Connector color	blue
Coding	I
Rated voltage (III / 3) [V]	250 [V]
Rated surge voltage (III / 3) [kV]	4 [kV]
Mating cycles	200, without resistive load

Technical data

<i>Strip length</i>	<i>9 mm / 0.35 inch</i>
<i>Mating force of a plug-in connection</i>	<i>approx. 20 ... 70 N (depending on pole number)</i>
<i>Unmating force of a plug-in connection</i>	<i>when unlocked: approx. 20 ... 70 N (depending on pole number)</i>
<i>Retention force of a plug-in connection</i>	<i>when locked: > 80N</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Flammability rating per UL 94</i>	<i>V0</i>
<i>Contact material</i>	<i>Copper or copper alloy, surface-treated</i>
<i>Processing temperature</i>	<i>-5°C ... +40°C</i>
<i>Weight [g]</i>	<i>454.265 [g]</i>

Images & drawings

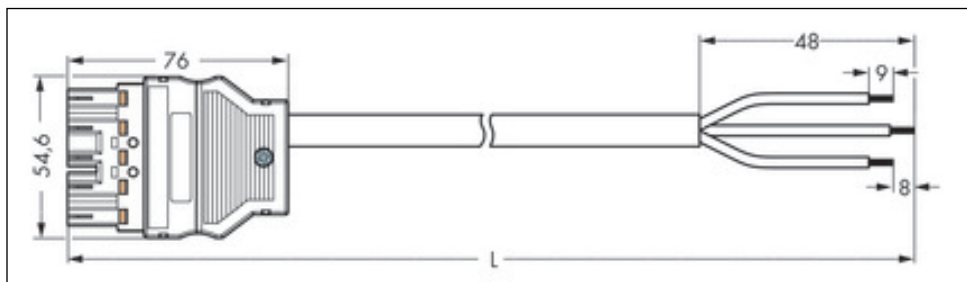

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.