

Customers also purchased



Product details

Details ^

Connection data

Connection technology	Push-in CAGE CLAMP®
Actuation type	Open Tool Slot
Connectable conductor materials	Copper
Nominal cross section	1.5 mm²
Solid conductor	0.25 2.5 mm² / 22 14 AWG

Geometrical Data

Width	4.2 mm / 0.165 inch
Height from upper-edge of DIN-35 rail	32.9 mm / 1.295 inch
Depth	50.8 mm / 2 inch

Mechanical data

Design	horizontal
Type of mounting	DIN-35 rail
Marking level	Center/side marking

Material Data



Color	green-yellow
Insulating material	Polyamide 66 (PA 66)
Fire load	0.074 MJ
Weight	6.669 g
Commercial data	

Country of Origin	DE
GTIN	4017332997317
Product Group	22 (TOPJOB S)



Approvals / CertiTcates

Ex-Approvals ^

Logo Approval CertiTcate name



Approval:

Physikalisch Technische Bundesanstalt (PTB)

CertiTcate name:

PTB 05 ATEX 1094 U (II 2 G Ex e II bzw.I M 2 Ex e I)

English

PDF (3.0 MB)

- Download
- Bookmark

Country speciTc Approvals `

provals ~

Item no. 2001-1207



Downloads

Documentation ^



Bid Text

2001-1207 Reihenklemmen, TOPJOB S Aug 13, 2018

DOCX

14.7 kB



- Download
- Bookmark

CAD Tles *



Compatible products

Carrier rail ^

^ Show fewer Show more

End plate *


Insulation stop *

lumpar

accessories

onvo vvarring markor

Item no. 2001-1207

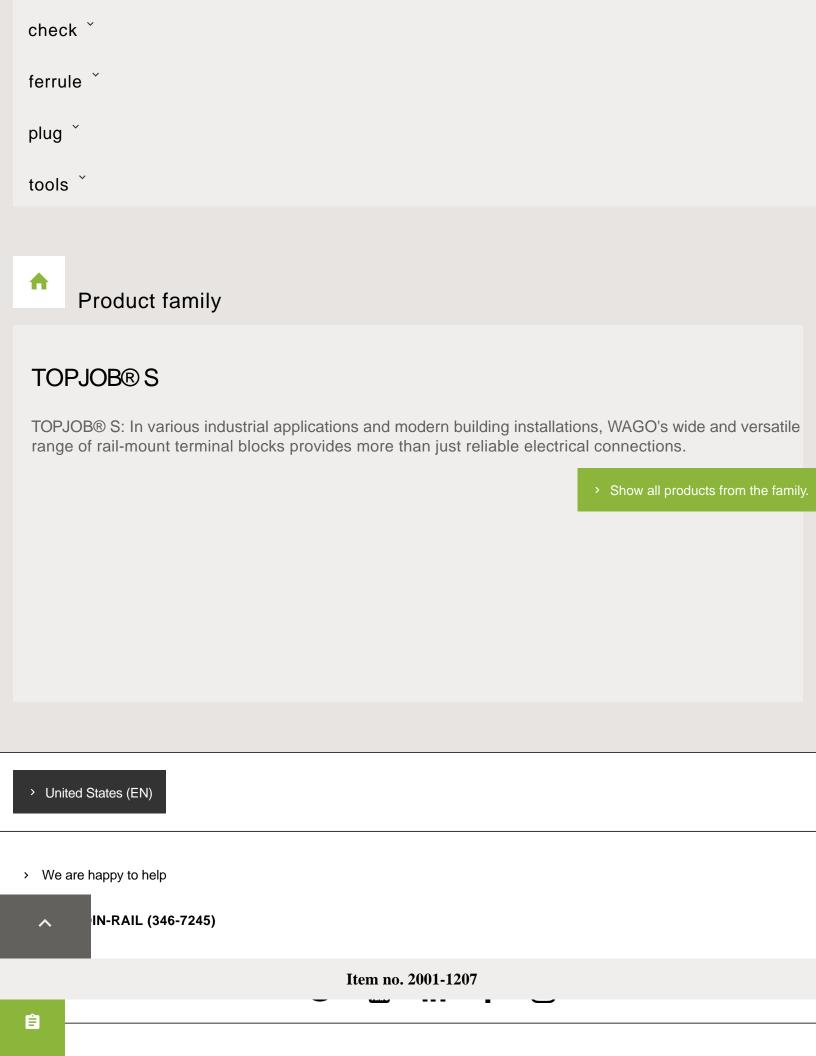

© 2018 WAGO Corporatio	
Contact	
Careers	
Imprint	
Privacy	
Terms and Cond	litions
Legal	