

Customers also purchased



Product details

Details ^



Ratings per IEC/EN 60664-1

Ratings note	potential - ground
Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated current	32 A
Ratings note 2	potential-potential

Connection data

Connection technology	Push-in CAGE CLAMP®
Actuation type	Open Tool Slot
Connectable conductor materials	Copper
Nominal cross section	2.5 mm²
Solid conductor	0.25 4 mm² / 22 12 AWG

Geometrical Data

Widtl	h	5.2 mm / 0.205 inch
^	nt from upper-edge of DIN-35 rail	42.3 mm / 1.665 inch
	Ĺ	06 mm / 2 70 inch

Item no. 2003-7645

Design	angled
Type of mounting	DIN-35 rail
Potential marking	L/L/PE
Marking level	Center/side marking
Material Data	
Color	gray
Insulating material	Polyamide 66 (PA 66)
Fire load	0.245 MJ
Weight	16.318 g
Commercial data	
Country of Origin	DE
Country of Origin GTIN	DE 4044918925600



Approvals / CertiTcates

Country speciTc Approvals ^

Logo Approval CertiTcate name

Logo



Approval:

A CertiTcation B.V. cate name: 43:01



Approval:
CCA
DEKRA CertiTcation B.V.
CertiTcate name:
NTR NL 7519



PDF (7.4 MB)

- Download
- Bookmark

Ship Approvals `



Downloads

Documentation ^



Bid Text

2003-7645 Reihenklemmen, TOPJOB S Aug 13, 2018

DOCX 15.1 kB






- Download
- **Bookmark**



Item no. 2003-7645

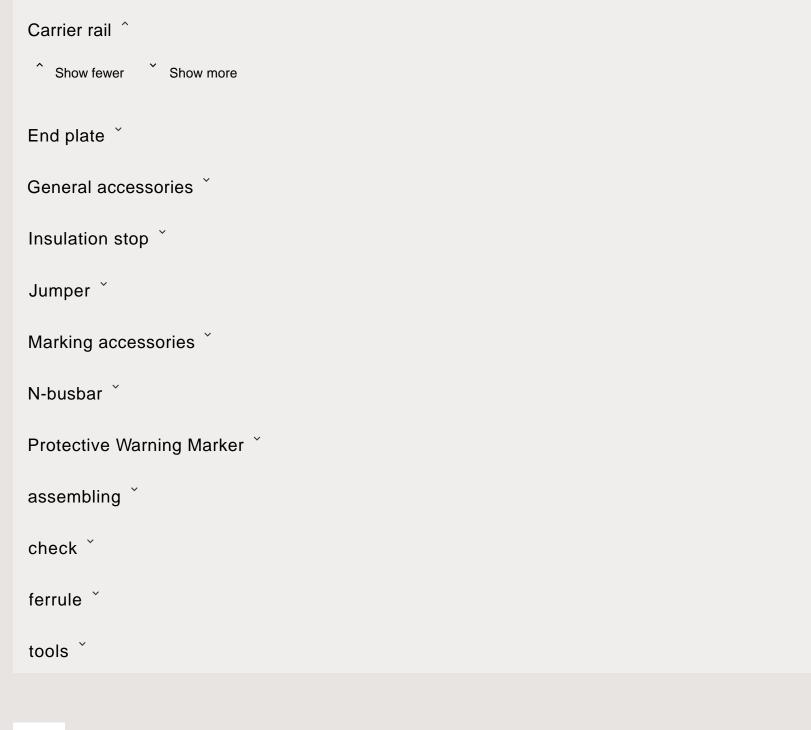



Product family

TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

> Show all products from the family.

> United States (EN)

> We are happy to help

1-800-DIN-RAIL (346-7245)











© 2018 WAGO Corporation	l
Contact	
Careers	
Imprint	
Privacy	
Terms and Conditions	
Legal	