


Availability ✓

PU (SPU): 1000 (100) Piece

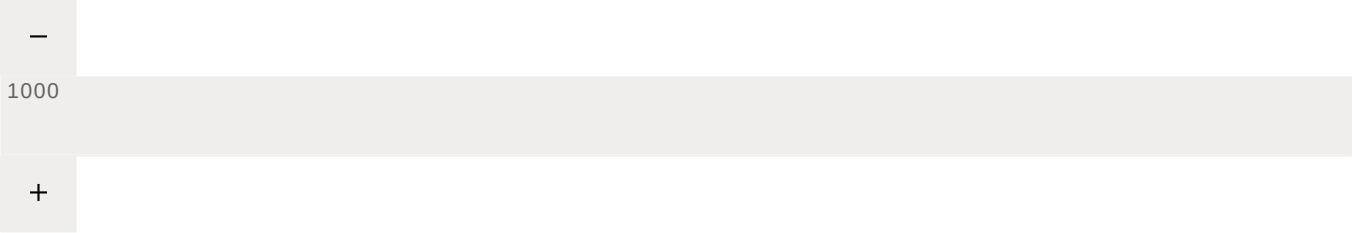

Add to project

- Data sheet as PDF
- Compare
- Bookmark
- Find distributors

Overview

Data

Approval

Downloads

Related products

Customers also purchased



Product details

Details ^

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (II / 2)	100 V
Rated impulse voltage (II / 2)	1.5 kV
Rated current	6 A
Legend (ratings)	(II / 2) $\triangleq$ Overvoltage category II / Pollution degree 2

Connection data

Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Conductor diameter	0.6 ... 0.8 mm / ... AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 Inch

Geometrical Data

Width	10 mm / 0.394 inch
Height	6.8 mm / 0.268 inch
Depth	10 mm / 0.394 inch

Material Data

Color	dark gray
-------	-----------

Item no. 243-204

Environmental Requirements



Surrounding air (operating) temperature

60 °C

Continuous operating temperature up to

105 °C



Commercial data

Country of Origin

DE

GTIN

4044918440585



Approvals / Certificates

Country specific Approvals ^

Logo
Approval
Certificate name

Logo



Approval:
CSA
DEKRA Certification B.V.
Certificate name:
70048857



Downloads

Documentation ^



Bid Text

243-204

10, 2017

Item no. 243-204



DOC
25.6 kB

 German

- › Download
- › Bookmark

CAD Tles 



Compatible products

General accessories 

 Show fewer  Show more

Marking accessories 

› United States (EN)

› We are happy to help

 1-800-DIN-RAIL (346-7245)



© 2018 WAGO Corporation

Contact

Careers

Imprint

Item no. 243-204



Terms and Conditions

