

Datablad | Artikkelnnummer: 709-582

Bryterutstyr-uttaksskap; for DIN-skinne- og skruemontering; for plugg, type F, CEE 7/4 (Schuko); vanlig i DE, NL, AT; med LED-statusindikator; med Push-in Cage Clamp med dobbel kobling



www.wago.com/709-582



RoHS
Compliant

[BOMcheck.net](https://www.bomcheck.net)

Farge:

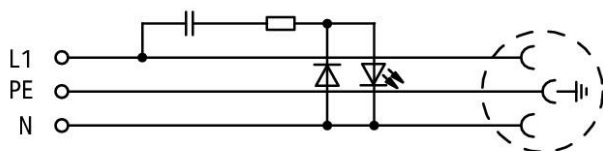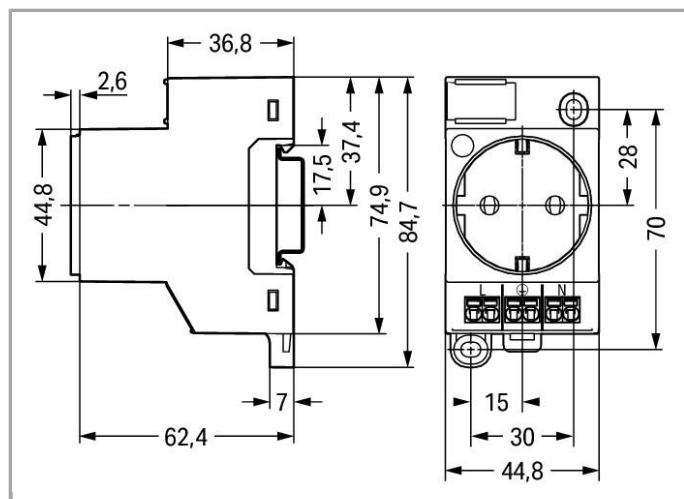

Data

Electrical data

Voltage type (1)	AC
------------------	----

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	2 kV
Rated current	16 A

Connection data

Connection type (1)	L, PE, N
Connection technology	Push-in CAGE CLAMP®
Actuation type	Push-in
Actuation direction (1)	Operation parallel to conductor entry
Connectable conductor materials	Copper
Nominal cross section	2.5 mm²
Solid conductor	0.2 ... 2.5 mm² / 24 ... 14 AWG
Stranded conductor	0.2 ... 2.5 mm² / 24 ... 14 AWG
Fine-stranded conductor	0.2 ... 2.5 mm² / 24 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 Inch
No. of poles	3
Number of connection types	3
Number of test slots	2

Geometrical Data

Width	45 mm / 1.772 inch
Height	65 mm / 2.559 inch
Høyde fra overflaten	65 mm / 2.559 inch
Høyde fra øverste kant av DIN-skinne	59.8 mm / 2.354 inch
Depth	84.7 mm / 3.335 inch

Mechanical data

Type of mounting	DIN-35 rail
Degree of protection	IP20
Potential marking	L N

Material Data

Color	signal-gul
Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0



Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Copper alloy
Contact plating	Sn
Weight	81.6 g

Commercial data

Packaging type	BOX
Country of origin	BG
GTIN	4055143718325

Godkjenninger/sertifikater

Landspesifikke godkjenninger

Logo	Godkjenning	Sertifikatnavn
	VDE VDE Prüf- und Zertifizierungsinstitut	40047680 (IEC 60884-1)

Nedlastinger

smartDATA

CAD data

3D Download 709-582	URL	Last ned
---------------------	-----	----------

Forbehold om endringer.

WAGO Norge

Har du spørsmål om våre produkter?
Vi tar alltid gjerne imot di samtale på 22 30 94 50.