
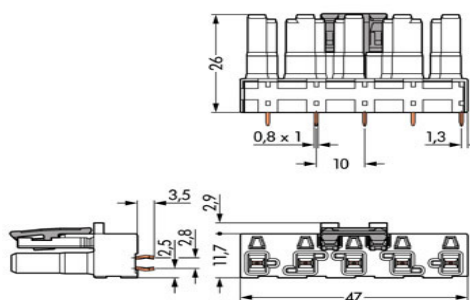


---

Item no.: 770-805  
Product description: SOCKET; FOR PRINTED CIRCUIT BOARD; 5 POLE;  
STRAIGHT MODULE FORMATION; PIN SPACING 10 MM /  
0.394 IN; 100% PROTECTED AGAINST MISMATING

---



Packing unit 50 pieces

|                          |             |
|--------------------------|-------------|
| Product group            | 20 (WINSTA) |
| pole count               | 5           |
| Measured voltage EN      | 400 V       |
| Measured shock voltage   | 6 kV        |
| Pollution degree         | 3           |
| Current intensity EN     | 25 A        |
| Weight                   | 10,745 g    |
| Color                    | black       |
| No. of connection Points | 3           |
| No. of potentials        | 5           |
| Height                   | 26 mm       |
| Height                   | 1,024 in    |
| Width                    | 47 mm       |
| Width                    | 1,85 in     |
| Depth                    | 11,7 mm     |
| Depth                    | 0,461 in    |



| Item number | Admission office | Approval no.      | Voltage [V] | Current [A] | Cross section [ mm² ] |
|-------------|------------------|-------------------|-------------|-------------|-----------------------|
| 770-805     | CCA              | NL5569            | 400         | 25          | 0,5-4,0               |
| 770-805     | cURus            | E45171            | 600         | 20          | 12                    |
| 770-805     | KEMA             | 2060958.04        | 400         | 25          | 0,5-4,0               |
| 770-805     | PRS              | TE/1719/880590/08 | 400         | 25          | 0,5-4,0               |

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected