

AUXILIARY SW. WITH TEST BUTTON 1NO+1NC FOR MCB 5SL, 5SY, 5SP, ON-OFF-SW. 5TL1 RCBO 5SU1, RCD 5SV



| Model                                                            |                                    |
|------------------------------------------------------------------|------------------------------------|
| Product brand name                                               | SENTRON                            |
| Product designation                                              | Auxiliary current switch           |
| Design of the product                                            | Mountable                          |
| Design of the product / factory mounted                          | No                                 |
| Control current                                                  |                                    |
| Type of voltage / of control voltage                             | AC/DC                              |
| Product details                                                  |                                    |
| Product extension                                                | Auxiliary current switch           |
| <ul style="list-style-type: none"> <li>can be mounted</li> </ul> | RCBO and miniature circuit breaker |
| Number                                                           |                                    |
| Number of fault signal contacts                                  | 0                                  |
| Number of NC contacts                                            | 1                                  |
| Number of NO contacts                                            | 1                                  |
| Number of CO contacts                                            | 0                                  |
| Mechanical Design                                                |                                    |
| Height                                                           | 90 mm                              |

|                          |       |
|--------------------------|-------|
| Width                    | 9 mm  |
| Depth                    | 70 mm |
| Number of width units    | 0.5   |
| Net weight               | 71 g  |
| Equipment marking        | SF    |
| • acc. to DIN EN 81346-2 |       |

#### Declaration of Conformity



#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3010-2>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3010-2>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3010-2](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3010-2)

##### CAX-Online-Generator


<http://www.siemens.com/cax>

##### Tender specifications

<http://www.siemens.com/specifications>

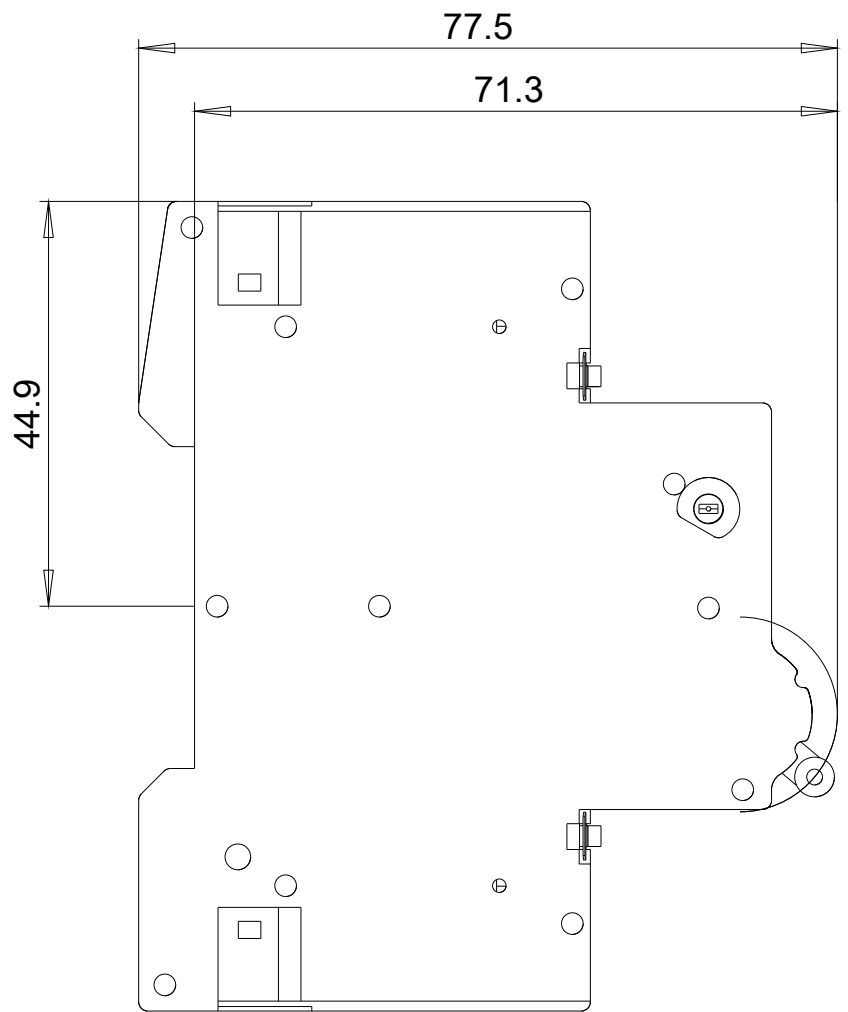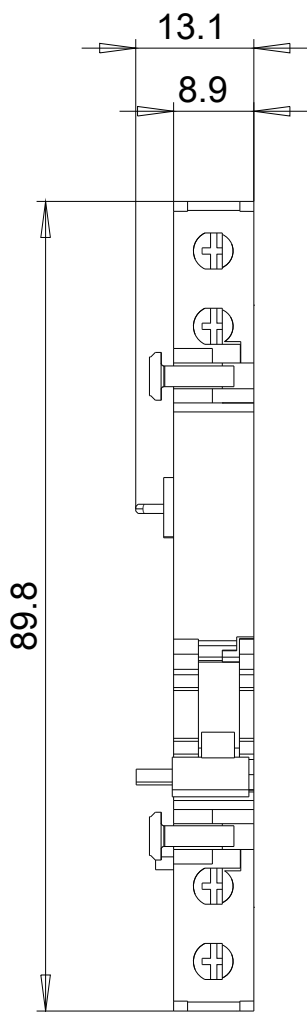

13 21

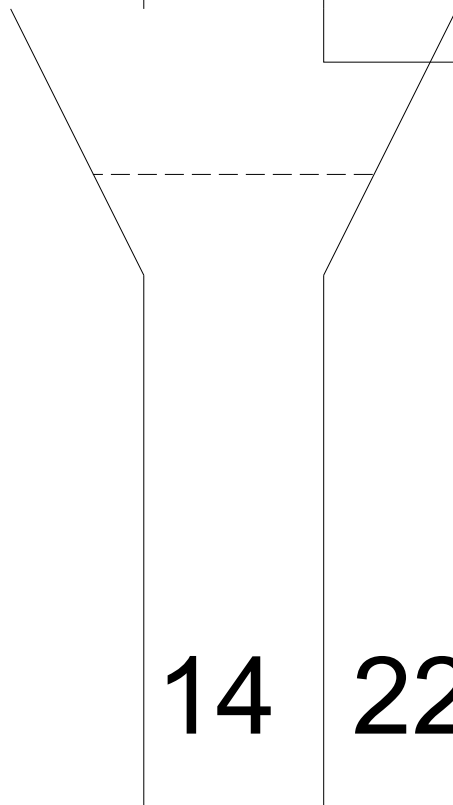

14 22

