

Input coupler Optocoupler 1 NO contact, transistor Input 110-230 V AC/DC Output max. 30 V DC, 0.5 A short circuit-proof Overall width 6.2 mm Spring-type terminal (push-in) thermal current 0.5 A



Figure similar

Article number		
Product brand name		SIRIUS
Product category		SIRIUS 3RQ3 coupling relays in slim design
Product designation		Coupling relays with semiconductor output (not plug-in)
Design of the product		Input coupling links
Product type designation		3RQ3

General technical data		
Display version LED		Yes
Product component		No
• Relay output		Yes
• semi-conductor output		
Consumed active power	W	0.5
Surge voltage resistance rated value	kV	4
Protection class IP		IP20
Shock resistance		
• acc. to IEC 60068-2-27		sinusoidal half-wave 15g / 11 ms
Vibration resistance		

• acc. to IEC 60068-2-6		6 ... 150 Hz: 2 g
Thermal current	A	0.5
Equipment marking		
• acc. to DIN EN 61346-2		K
• acc. to DIN EN 81346-2		K

Control circuit/ Control

Control supply voltage at AC		
• at 50 Hz rated value	V	110 ... 230
• at 60 Hz rated value	V	110 ... 230
Control supply voltage at DC		
• rated value	V	110 ... 230
Operating range factor control supply voltage rated value at DC		
• initial value		1
• Full-scale value		1
Operating range factor control supply voltage rated value at AC at 50 Hz		
• initial value		1
• Full-scale value		1
Operating range factor control supply voltage rated value at AC at 60 Hz		
• initial value		1
• Full-scale value		1
Off-delay time	ms	7
Product component Plug-in socket		No

Auxiliary circuit

Type of switching contact		NO contact
Number of NO contacts		
• for auxiliary contacts		1

Main circuit

Type of voltage		AC/DC
------------------------	--	-------

Inputs/ Outputs

Property of the output Short-circuit proof		No
---	--	----

Electromagnetic compatibility

EMC emitted interference		
• acc. to IEC 60947-1		ambience A (industrial sector)
EMI immunity		
• acc. to IEC 60947-1		corresponds to degree of severity 3
Conducted interference		
• due to burst acc. to IEC 61000-4-4		2 kV

• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge

Display

Display version	
• as status display by LED	LED green

Connections/Terminals

Product function		No
• removable terminal		
Type of electrical connection		PUSH-IN connection (spring-loaded connection)
• for auxiliary and control current circuit		
Wire length		
• at AC maximum	m	500
• at DC maximum	m	1 000
Type of connectable conductor cross-sections		
• solid		1x (0.25 ... 2.5 mm ²)
• finely stranded with core end processing		1x (0.25 ... 1.5 mm ²)
• finely stranded without core end processing		1x (0.25 ... 2.5 mm ²)
• at AWG conductors solid		1 x (20 ... 14)
• at AWG conductors stranded		1x (20 ... 14)
Connectable conductor cross-section		
• solid	mm ²	0.25 ... 2.5
• finely stranded with core end processing	mm ²	0.25 ... 1.5
• finely stranded without core end processing	mm ²	0.25 ... 2.5
AWG number as coded connectable conductor cross section		
• solid		20 ... 14
• stranded		20 ... 14

Installation/ mounting/ dimensions

Mounting position		any
Mounting type		snap-on mounting
Height	mm	93
Width	mm	6.2
Depth	mm	72.5
Required spacing		
• with side-by-side mounting		
— forwards	mm	0
— Backwards	mm	0

— upwards	mm	0
— downwards	mm	0
— at the side	mm	0
• for grounded parts		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	0
— at the side	mm	0
— downwards	mm	0
• for live parts		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	0
— downwards	mm	0
— at the side	mm	0

Ambient conditions

Installation altitude at height above sea level		
• maximum	m	2 000
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85
Relative humidity		
• during operation	%	10 ... 95

Certificates/approvals

General Product Approval	Declaration of Conformity	other
 CCC	 EAC	 EG-Konf.

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RQ3070-2SG30>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RQ3070-2SG30>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RQ3070-2SG30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RQ3070-2SG30&lang=en

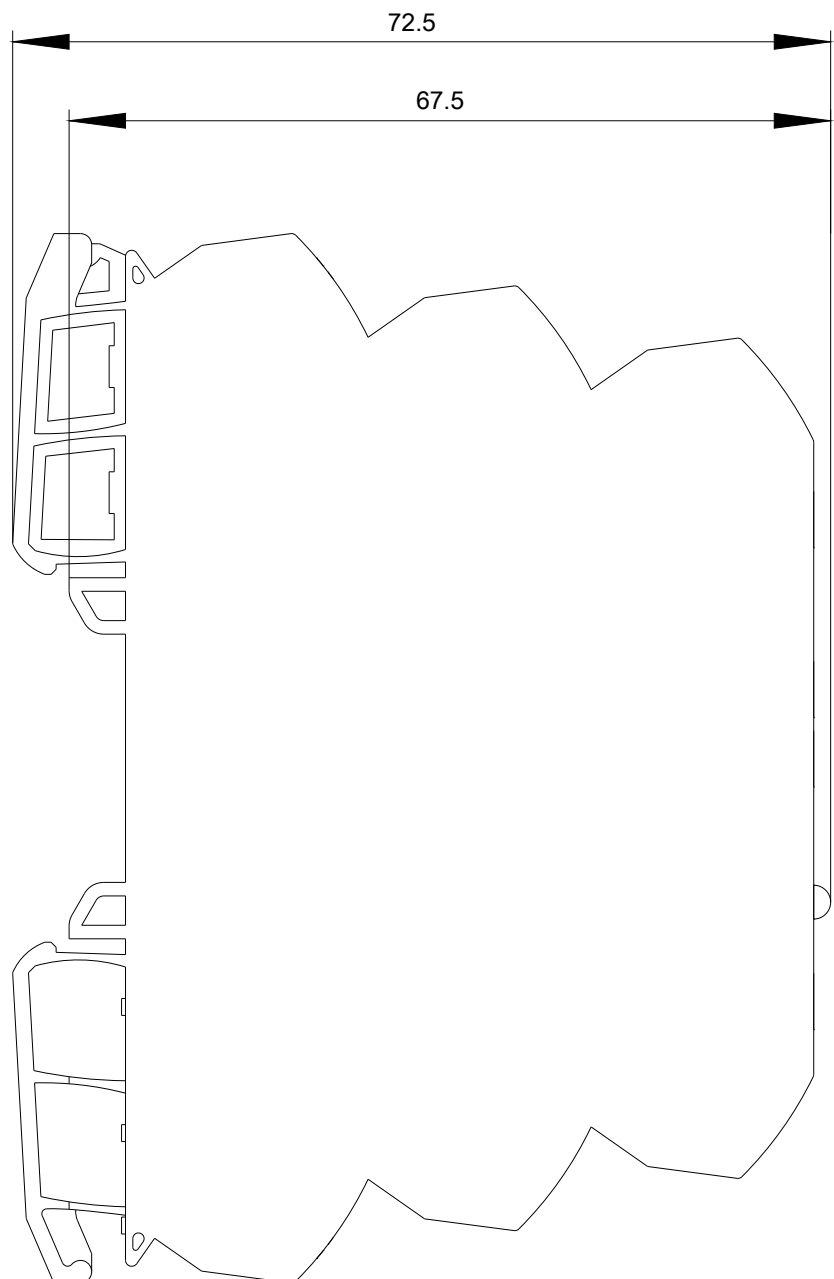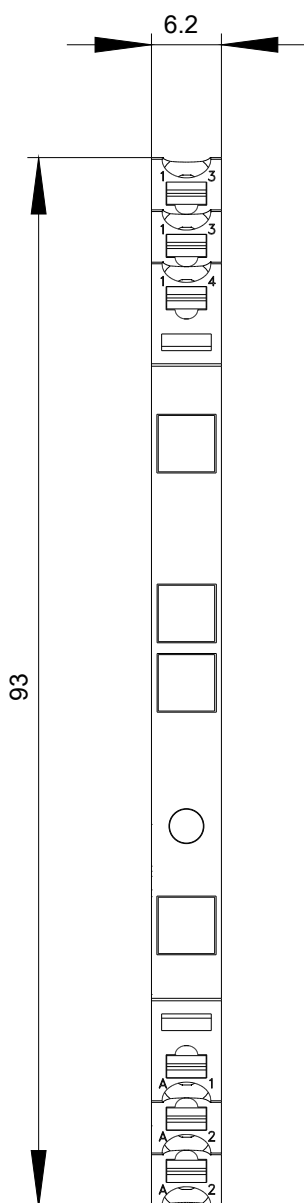

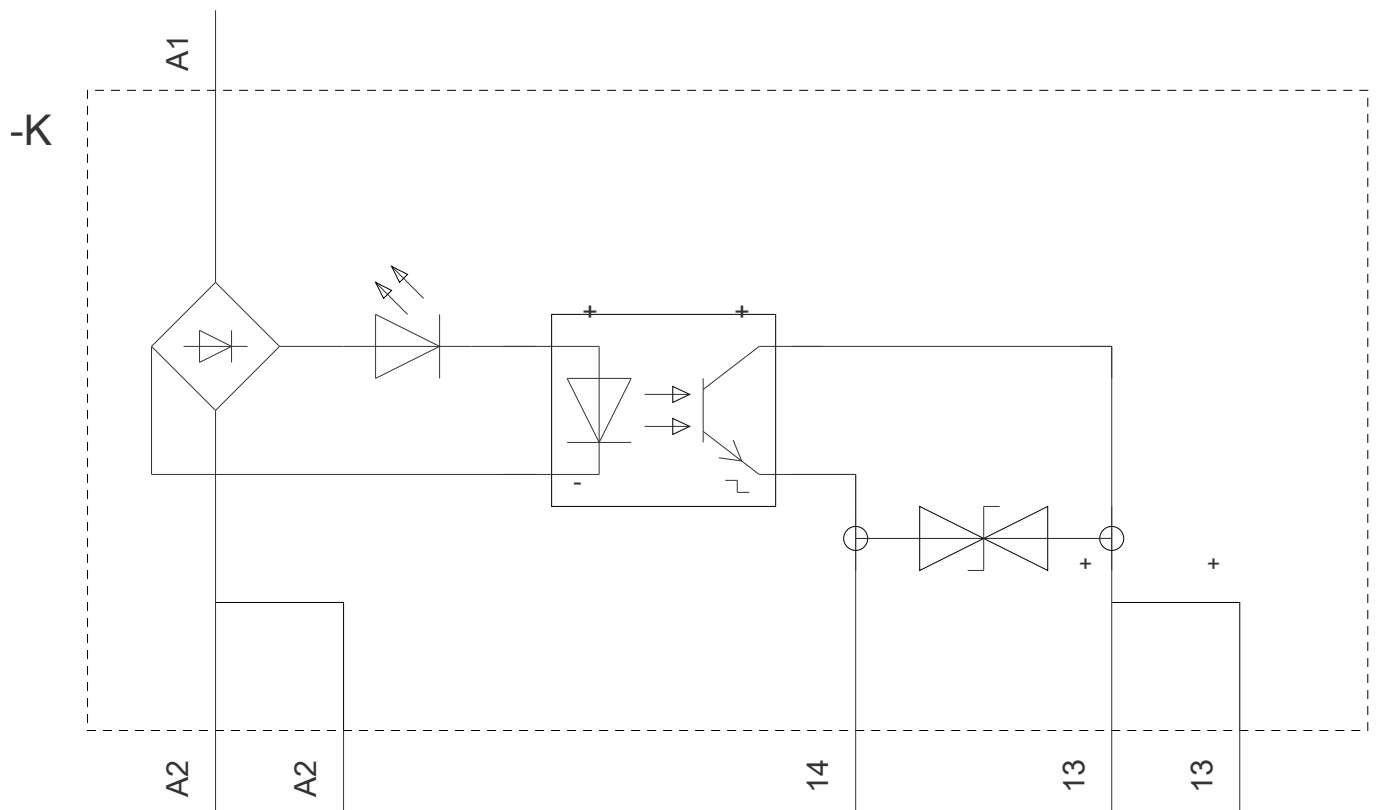

last modified:

07/24/2017