



SWITCH-DISCONNECTOR 125A, FRAME SIZE 2,  
3-POLE FRONT OPERATING CENTER BASIC UNIT  
WITHOUT HANDLE FLAT TERMINAL INCL. PHASE  
BARRIERS

Similar to image

**General technical details:**

<b>product brand name</b>	SENTRON	
<b>Product designation</b>	Switching device	
<b>Design of the product</b>	3KD Switch Disconnectors	
<b>Size of switch disconnector</b>	2	
<b>Number of poles</b>	3	
<b>Continuous current</b>		
• rated value	A	125
• at 40 °C / rated value	A	125
• at 45 °C / rated value	A	125
• at 50 °C / rated value	A	125
• at 55 °C / rated value	A	125
• at 60 °C / rated value	A	125
• at 65 °C / rated value	A	125
• at 70 °C / rated value	A	125
• at DC / rated value	A	125
<b>Operating current</b>		
• at AC-21 A	A	125
• at 400 V / maximum		

• at 500 V / maximum	A	125
• at 690 V / maximum	A	125
• at AC-22 A		
• at 400 V / at 50/60 Hz / rated value / maximum	A	125
• at 500 V / at 50/60 Hz / rated value / maximum	A	125
• at 690 V / at 50/60 Hz / rated value / maximum	A	125
• at AC-23 A		
• at 400 V / at 50/60 Hz / rated value / maximum	A	125
• at 500 V / at 50/60 Hz / rated value / maximum	A	125
• at 690 V / at 50/60 Hz / rated value / maximum	A	125
• at DC-21 A		
• at 220 V / maximum / note		125 / 2
• at 440 V / rated value / maximum / note		125 / 3
• at DC-22 A		
• at 220 V / rated value / maximum / note		125 / 2
• at 440 V / rated value / maximum / note		125 / 3
• at DC-23 A		
• at 220 V / rated value / maximum / note		125 / 2
• at 440 V / rated value / maximum / note		125 / 3
<b>Operational voltage</b>		
• at 50/60 Hz / for AC / rated value	V	690
• with 3 current paths in series / with DC / rated value	V	440
<b>Insulation voltage / rated value</b>	V	1,000
<b>Impulse voltage resistance / rated value</b>	kV	8
<b>Overvoltage class</b>		III
<b>Operating power / at AC-23 A</b>		
• at 400 V / at 50/60 Hz / rated value	kW	55
• at 500 V / at 50/60 Hz / rated value	kW	75
• at 690 V / at 50/60 Hz / rated value	kW	110
<b>I<sub>2t</sub> value / with closed switch</b>		
• for combination switch + fuse		
• at 400 V / maximum	A <sup>2</sup> ·s	135,600
• at 500 V / maximum	A <sup>2</sup> ·s	135,600
• at 690 V		
• for combination switch +gG fuse / maximum	A <sup>2</sup> ·s	178,300
• for combination switch +aM fuse / maximum	A <sup>2</sup> ·s	201,200
<b>Let-through current / with closed switch</b>		
• for combination switch + fuse		
• at 400 V / maximum permissible	A	17,900
• at 500 V / maximum permissible	A	17,900

• at 690 V		
• with combination switch +gG fuse / maximum permissible	A	17,600
• with combination switch +aM fuse / maximum permissible	A	18,700
<b>Short-time current resistance (Icw) / limited to 1 s / rated value</b>	kA	4
<b>Making capacity short-circuit current (Icm) / for switch disconnector / without fuse link / rated value / minimum</b>	kA	12
<b>Conditional short-circuit current / with line-side fuse protection</b>		
• at 500 V / by gG fuse / rated value	kA	100
• at 690 V / by gG fuse / rated value	kA	65
<b>Active power loss / with conventional rated thermal current / per pole</b>	W	4.5
<b>Product equipment / interlock</b>		No
<b>Type of the driving mechanism / motor drive</b>		No
<b>Product extension / optional / motor drive</b>		No
<b>Design of the electrical connection / for main current circuit</b>		flat connector
<b>Type of connectable conductor cross-sections</b>		
• for copper conductor / stranded / with lug		
• according to DIN 46234		1x (2.5 ... 95 mm <sup>2</sup> ), 2x (25 ... 50 mm <sup>2</sup> )
• according to DIN 46235		1x (25 ... 70 mm <sup>2</sup> ), 2x (25 ... 50 mm <sup>2</sup> )
• for copper busbar		1x (20x3 mm <sup>2</sup> )
<b>Number of connected NC contacts / for auxiliary contacts</b>		0
<b>Number of connected NO contacts / for auxiliary contacts</b>		0
<b>Number of connected changeover contacts / for auxiliary contacts</b>		0
<b>Product extension / auxiliary switch</b>		Yes
<b>Number of NC contacts / for auxiliary contacts</b>		0
<b>Number of NO contacts / for auxiliary contacts</b>		0
<b>Number of changeover contacts / for auxiliary contacts</b>		4
<b>Acceptability for application / switch disconnector</b>		Yes
<b>Acceptability for application</b>		
• emergency stop switch		No
• main switch		Yes
• safety cut-out switch		Yes
• maintenance/repair switch		Yes
<b>Design of the operating mechanism</b>		without
<b>Mounting type</b>		Floor mounting and snap-on mounting to 35 mm standard mounting rail
<b>Mounting type / rail mounting</b>		Yes
<b>Mounting type / front mounting with 4-hole attachment</b>		No
<b>Mounting type / front mounting with central attachment</b>		No
<b>Type from device</b>		fixed mounting

<b>mounting position</b>		any
<b>Position / of switch operating mechanism</b>		after the first pole
<b>Design of handle</b>		without
<b>Width</b>	mm	121
<b>Height</b>	mm	168
<b>Depth</b>	mm	68
<b>Protection class IP</b>		IP00
• on the front		IP00
• with closed switch / with cover or cable lug cover		IP20
<b>Ambient temperature</b>		
• during operating	°C	-25 ... +70
• during storage	°C	-50 ... +80
<b>Degree of pollution</b>		3
<b>Mechanical operating cycles as operating time / typical</b>		15,000
<b>Electrical endurance (switching cycles)</b>		
• at AC-23 A / at 690 V / at 50/60 Hz		1,500
• at DC-23 A		1,000
• at 220 V		1,000
• at 440 V		1,000
<b>Design of display</b>		
• for switch position indicator door-coupling rotary operating mechanism		ON-OFF
<b>Net weight</b>	g	830
<b>Reference code / according to DIN EN 61346-2</b>		Q
<b>Item designation / according to DIN EN 81346-2</b>		Q

#### Certificates/approvals:

<b>General Product Approval</b>	<b>Declaration of Conformity</b>
---------------------------------	----------------------------------



#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3KD3230-0NE20-0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/3KD3230-0NE20-0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3KD3230-0NE20-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD3230-0NE20-0)

**Tender specifications**

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

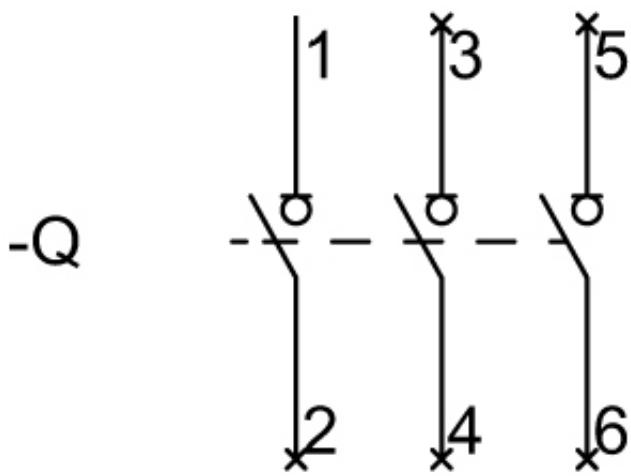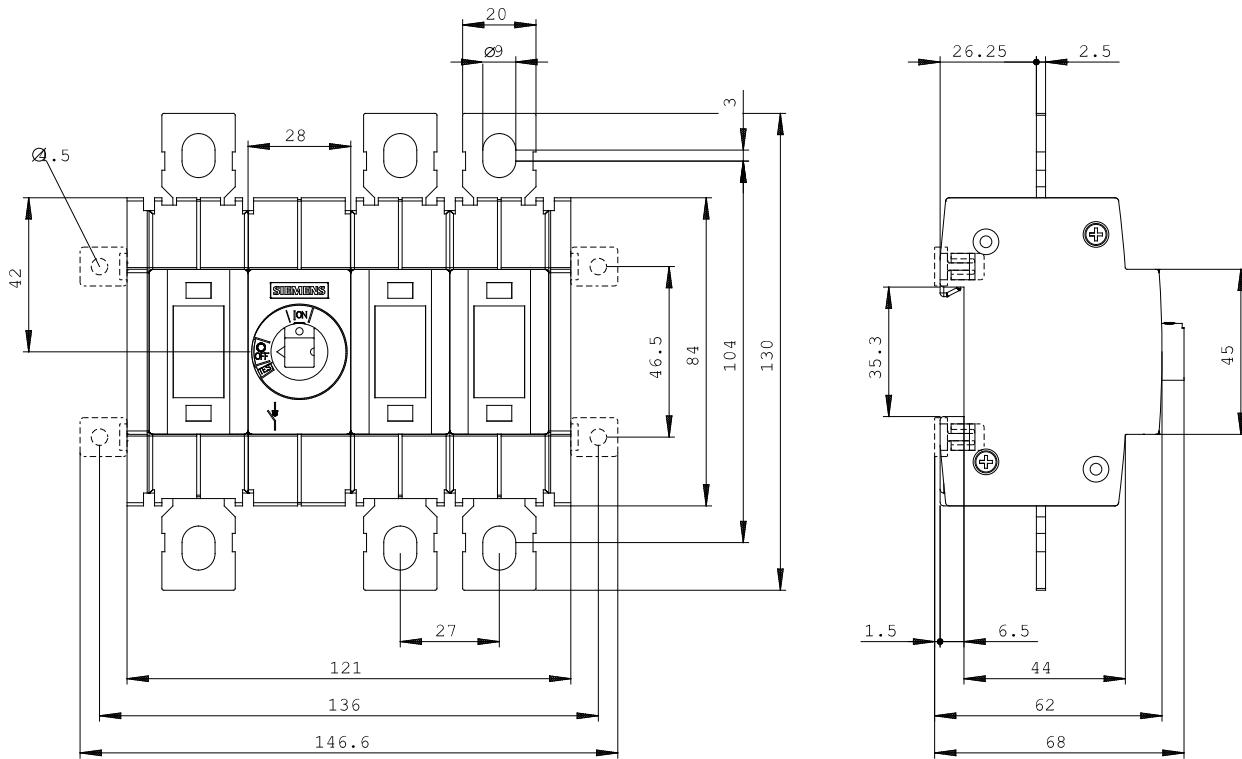

**last change:**

Apr 21, 2014