

DOOR-COUPLING ROTARY OPERATING MECHANISM, FOR CIRCUIT BREAKER SZ. S2, EMERGENCY OFF HANDLE NEW DESIGN



Figure similar

General technical data:		
product brandname		SIRIUS
Product designation		door-coupling rotary operating mechanism for heavy-duty operating conditions
Size of the circuit-breaker		S2
Design of the product		EMERGENCY OFF door-coupling rotary operating mechanism
Suitability for use		circuit-breakers S2
Protection class IP on the front		IP65
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70
Operating frequency maximum	1/h	15
Color of the actuating element		red / yellow
Installation/ mounting/ dimensions:		
Mounting position		any
Mounting type		screw fixing

Width	mm	75
Height	mm	75
Depth	mm	78
Length	mm	300
Diameter	mm	40
Required spacing for grounded parts		
• forwards	mm	0
• Backwards	mm	0
• upwards	mm	0
• at the side	mm	0
• downwards	mm	0

Certificates/ approvals:

Certificate of suitability

CE / UL / CSA

General Product Approval	Declaration of Conformity	Test Certificates		Shipping Approval
 CSA	 UL	 EG-Konf.	Type Test Certificates/Test Report	Special Test Certificate  ABS

Shipping Approval	other			
 BUREAU VERITAS	Confirmation	Environmental Confirmations	 VDE	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2936-2C>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2936-2C>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2936-2C&lang=en

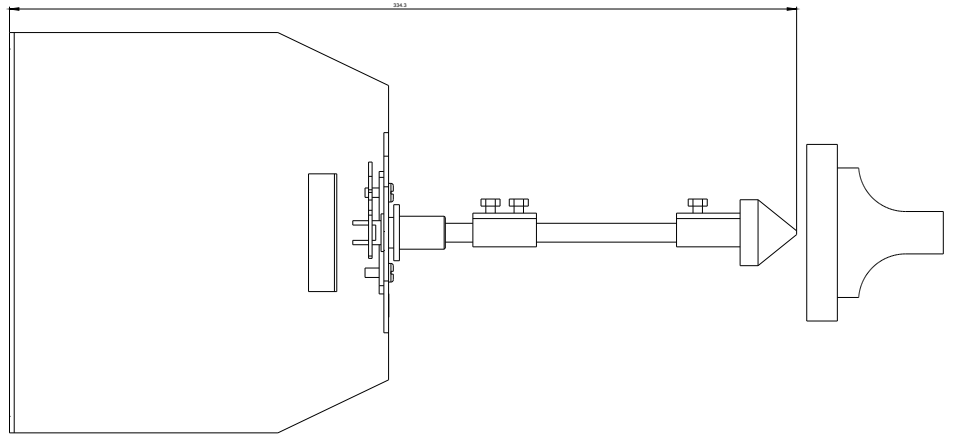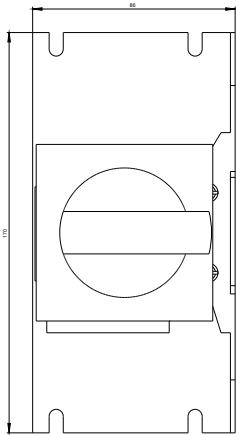

last modified:

06/20/2017