


N-ISOL. TERMINAL THERMOPLASTIC SCREW TERMINAL
BLUE,
6MM, SZ 2.5

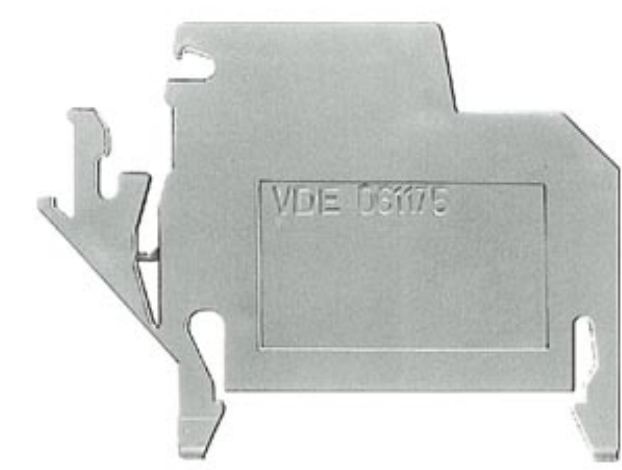

Similar to image

Technical data:		
Type of mounting		others
Length	mm	55
Color		blue
Busbar design		6x6 mm
Design of the electrical connection		screw-type terminals
Number of terminal points		1
Height of lowest mounting type	mm	35
Operating voltage / rated value	V	500
Operating current / rated value	A	24
Combustibility class acc. to UL 94		others
Insulation material		thermoplastic
Terminal contact spacing	mm	6
Product component / required / connection plate		No
Conductor cross-section that can be connected		
• solid		
• minimum	mm²	2.5
• maximum	mm²	2.5
• multibrin		

- minimum
- maximum
- finely stranded
 - with wire end processing
 - minimum
 - maximum
 - without wire end processing
 - minimum
 - maximum

mm ²	2.5
mm ²	2.5
mm ²	2.5
mm ²	2.5
mm ²	2.5
mm ²	2.5

Certificates/approvals:

General Product Approval



EG-Konf.



GL



PRS

Shipping Approval



ABS



BUREAU
VERITAS

other

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WA1011-1NF01/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1NF01

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Mar 4, 2013