



SILIZED FUSE LINK 500V F.SEMICONDUCTOR  
PROTECTION EXTRA FAST,  
SIZE DIII THREAD E33, 35A

Similar to image

### Technical data:

|                                                             |    |                         |
|-------------------------------------------------------------|----|-------------------------|
| <b>Color coding of the fuse link</b>                        |    | others                  |
| <b>Current / for AC / rated value</b>                       | A  | 35                      |
| <b>Tripping characteristic class</b>                        |    | super-quick acting (FF) |
| <b>Size of the fallback-system / acc. to DIN EN 60269-1</b> |    | DIII                    |
| <b>Supply voltage</b>                                       |    |                         |
| • for AC / rated value                                      | V  | 500                     |
| • for DC                                                    | V  | 500                     |
| <b>Switching capacity current</b>                           |    |                         |
| • in accordance with IEC 60947-2 / rated value              | kA | 50                      |
| • with DC / in accordance with IEC 60947-2 / rated value    | kA | 8                       |
| <b>Ambient temperature</b>                                  |    |                         |
| • minimum                                                   | °C | -5                      |
| • maximum                                                   | °C | 40                      |

### Certificates/approvals:

| General Product Approval                                                                  | Declaration of Conformity                                                                     | Test Certificates                                  | other                                       |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------|
| <br>GOST | <br>EG-Konf. | <a href="#">Type Test Certificates/Test Report</a> | <a href="#">Environmental Confirmations</a> |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5SD450/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SD450](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD450)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

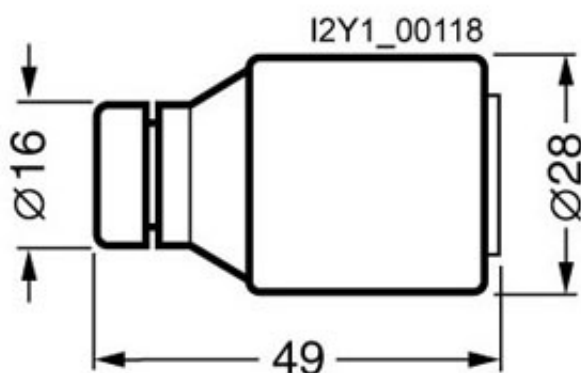

last change:

Nov 4, 2012