


THROUGH-TYPE TERMINAL THERMOPL. SCREW
TERMINAL ON BOTH ENDS SINGLE TERM.,
GREEN-YELLOW, 6.5MM,4

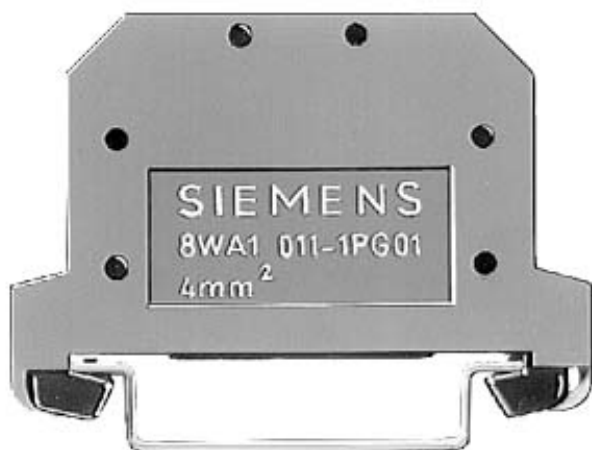

Similar to image

Technical data:

Type of mounting		DIN rail 35 mm
Length	mm	51
Height of lowest mounting type	mm	26
Terminal contact spacing	mm	6.5
Combustibility class acc. to UL 94		V2
Color		green-yellow
Insulation material		thermoplastic
Position / of terminal		lateral
Operating voltage / rated value	V	800
Operating current / rated value	A	32
Product component / required / connection plate		No
Design of terminal / terminal levels linked internally		No
Design tested acc. to type of protection / EEx e		No
Number of terminal levels		1
Number of terminal points / per terminal level		2
Section de conducteur raccordable		
• solid		
• minimum	mm²	4

• maximum	mm ²	4
• multibrin		
• minimum	mm ²	4
• maximum	mm ²	4
• finely stranded / without wire end processing		
• minimum	mm ²	4
• maximum	mm ²	4
Ambient temperature / during operating		
• minimum	°C	-25
• maximum	°C	55
Conductor cross-section that can be connected / finely stranded / with wire end processing		
• minimum	mm ²	4
• maximum	mm ²	4
Design of the electrical connection		
• 1		screw-type terminal
• 2		screw-type terminal

Certificates/approvals:

General Product Approval



CSA



GOST



UL



EG-Konf.

Shipping Approval



ABS



BUREAU
VERITAS



GL



PRS

other

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WA1011-1PG11/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1PG11

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Mar 11, 2013