


TWO-TIER TERMINAL THERMOPLASTIC SCREW
TERMINAL ON BOTH ENDS 2POLE,
BEIGE, 6.5MM,
SZ 4 2 SEPARATE CONNECTIONS

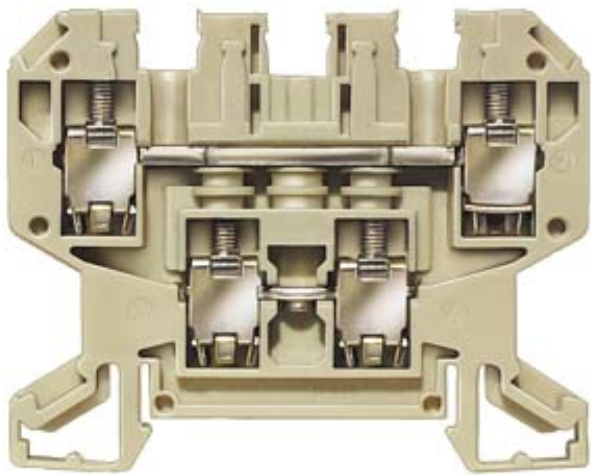

Similar to image

Technical data:		
Type of mounting		DIN rail 35 mm
Length	mm	64
Height of lowest mounting type	mm	45
Operating voltage / rated value	V	690
Operating current / rated value	A	32
Combustibility class acc. to UL 94		V2
Insulation material		thermoplastic
Terminal contact spacing	mm	6.5
Position / of terminal		lateral
Number of potentials		2
Color / of the insulating body		beige
Product component / required / connection plate		No
Product feature		
• PE function		No
• N separation slides		No
• N function		No
Product component / Test separator		No
Design of the electrical connection		

• 1		screw-type terminal
• 2		screw-type terminal
Ambient temperature / during operating		
• maximum	°C	55
Conductor cross-section that can be connected		
• solid		
• minimum	mm ²	4
• maximum	mm ²	4
• multibrin		
• minimum	mm ²	4
• maximum	mm ²	4
• finely stranded		
• with wire end processing		
• minimum	mm ²	4
• maximum	mm ²	4
• without wire end processing		
• minimum	mm ²	4
• maximum	mm ²	4

Certificates/approvals:

General Product Approval



EG-Konf.

Shipping Approval



ABS



BUREAU
VERITAS



GL



PRS

other

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WA1011-2DG11/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-2DG11

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Mar 11, 2013