



FUSE-SWITCH-DISCONNECTOR I=630A,
U=690V,
FOR CABLE-LUG CONNECTION FUSE SIZE NH2 AND
NH3

Similar to image

General technical details:

Continuous current / rated value	A	630
Operating current / at AC-21 / rated value	A	630
Operating voltage		
• for DC / rated value	V	440
• at 50/60 Hz / for AC / rated value	V	690
type of voltage		AC/DC
Number of poles		3
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Acceptability for application		
• emergency stop switch		No
• safety cut-out switch		Yes
Active power loss / maximum	W	39
Breaking capacity limit short-circuit current (I_{cu}) / at 400 V / rated value	kA	5.04
Item designation		
• according to DIN EN 61346-2		Q

- according to DIN 40719 extendable after IEC 204-2 / according to IEC 750

Q

Mechanical design:

Design of the load switch

- Strip form

No

Type of mounting

floor mounting

Design of the electrical connection

- for main current circuit

flat connector

Fuse system

LV HRC fuse

Installation size of fuse-link

3 and 2

Installation size of disconnecting link

3 and 2

Width

mm

276

Height

mm

300

Depth

mm

207

Ambient conditions:

Ambient temperature

- during storage
- during operating

°C

-50 ... +80

°C

-25 ... +55

Protection class IP

IP00

Certificates/approvals:

General Product Approval

Test Certificates

other



CCC



GOST

[Special Test Certificate](#)
[Confirmation](#)
[Declaration of Conformity](#)
[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NP5460-0CA00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP5460-0CA00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81 GAEB83 RTF TXT](#)

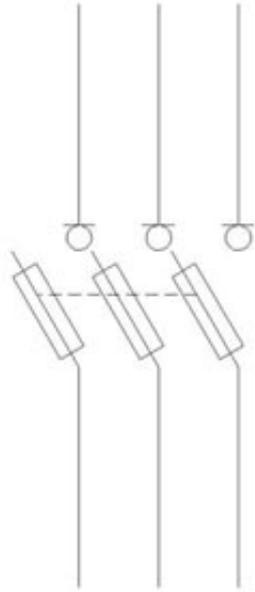

last change:

Mar 18, 2013