



FUSE-SWITCH-DISCONNECTOR I=250A,  
U=690V,  
FUSE SIZE NH0 AND NH1 FOR CABLE-LUG  
CONNECTION

Similar to image

**General technical details:**

<b>Continuous current / rated value</b>	A	250
<b>Operating current / at AC-21 / rated value</b>	A	250
<b>Operating voltage</b>		
• for DC / rated value	V	440
• at 50/60 Hz / for AC / rated value	V	690
<b>type of voltage</b>		AC/DC
<b>Number of poles</b>		3
<b>Number of NC contacts / for auxiliary contacts</b>		0
<b>Number of NO contacts / for auxiliary contacts</b>		0
<b>Number of changeover contacts / for auxiliary contacts</b>		0
<b>Acceptability for application</b>		
• emergency stop switch		No
• safety cut-out switch		Yes
<b>Active power loss / maximum</b>	W	8
<b>Breaking capacity limit short-circuit current (I<sub>cu</sub>) / at 400 V / rated value</b>	kA	2.5
<b>Item designation</b>		
• according to DIN EN 61346-2		Q

- according to DIN 40719 extendable after IEC 204-2 / according to IEC 750

Q

### Mechanical design:

#### Design of the load switch

- Strip form

No

#### Type of mounting

floor mounting

#### Design of the electrical connection

- for main current circuit

flat connector

#### Fuse system

LV HRC fuse

#### Installation size of fuse-link

1 and 0

#### Installation size of disconnecting link

1 and 0

#### Width

mm 207

#### Height

mm 300

#### Depth

mm 176

### Ambient conditions:

#### Ambient temperature

- during storage
- during operating

°C -50 ... +80

°C -25 ... +55

#### Protection class IP

IP00

### Certificates/approvals:

#### General Product Approval

#### Test Certificates

#### other



CCC



GOST

[Special Test Certificate](#)

[Confirmation](#)

[Declaration of Conformity](#)

[other](#)

### Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NP5260-0CA00/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NP5260-0CA00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP5260-0CA00)

#### CAX-Online-Generator

<http://www.siemens.com/cax>

#### Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

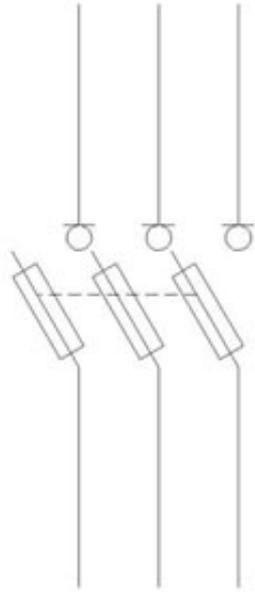

**last change:**

Mar 18, 2013