

CONTACTOR RELAY, 4NO, AC 24V, 50/60 HZ, SZ S00, SPRING-LOADED TERMINAL



|  |                            |
|--|----------------------------|
| Product brand name                         | SIRIUS                     |
| Product designation                        | contactor relay            |
| Product type designation                   | 3RH2                       |
| General technical data                     |                            |
| Size of contactor                          | S00                        |
| Product extension                          |                            |
| • Auxiliary switch                         | Yes                        |
| Insulation voltage                         |                            |
| • with degree of pollution 3 rated value   | 690 V                      |
| Degree of pollution                        | 3                          |
| Surge voltage resistance rated value       | 6 kV                       |
| Protection class IP                        |                            |
| • on the front                             | IP20                       |
| Shock resistance at rectangular impulse    |                            |
| • at AC                                    | 7,3g / 5 ms, 4,7g / 10 ms  |
| Shock resistance with sine pulse           |                            |
| • at AC                                    | 11,4g / 5 ms, 7,3g / 10 ms |
| Mechanical service life (switching cycles) |                            |
| • of contactor typical                     | 30 000 000                 |

|   |                                  |
|---|----------------------------------|
| <ul style="list-style-type: none"> <li>• of the contactor with added electronics-compatible auxiliary switch block typical</li> <li>• of the contactor with added auxiliary switch block typical</li> </ul> | 5 000 000<br><br>10 000 000      |
| <b>Equipment marking</b>  |                                  |
| <ul style="list-style-type: none"> <li>• acc. to DIN EN 61346-2</li> <li>• acc. to DIN EN 81346-2</li> </ul>  | K<br>K                           |
| <b>Ambient conditions</b>   |                                  |
| <b>Ambient temperature</b>  |                                  |
| <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>  | -25 ... +60 °C<br>-55 ... +80 °C |
| <b>Main circuit</b>   |                                  |
| <b>No-load switching frequency</b>  |                                  |
| <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>  | 10 000 1/h<br>10 000 1/h         |
| <b>Control circuit/ Control</b>   |                                  |
| <b>Type of voltage of the control supply voltage</b>  | AC                               |
| <b>Control supply voltage at AC</b>   |                                  |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>  | 24 V<br>24 V                     |
| <b>Operating range factor control supply voltage rated value of magnet coil at AC</b>   |                                  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 0.8 ... 1.1<br>0.85 ... 1.1      |
| <b>Apparent pick-up power of magnet coil at AC</b>  | 37 V·A                           |
| <b>Inductive power factor with closing power of the coil</b>  | 0.8                              |
| <b>Apparent holding power of magnet coil at AC</b>  | 5.7 V·A                          |
| <b>Inductive power factor with the holding power of the coil</b>  | 0.25                             |
| <b>Closing delay</b>  |                                  |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 8 ... 33 ms                      |
| <b>Opening delay</b>  |                                  |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 4 ... 15 ms                      |
| <b>Arcing time</b>  | 10 ... 15 ms                     |
| <b>Auxiliary circuit</b>  |                                  |
| <b>Number of NO contacts</b>  |                                  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts</li> <li>— instantaneous contact</li> </ul>   | 4<br>4                           |
| <b>Identification number and letter for switching elements</b>  | 40 E                             |
| <b>Operating current at AC-12 maximum</b>   | 10 A                             |

|  |           |
|--|-----------|
| <b>Operating current at AC-15</b>                                |           |
| • at 230 V rated value   | 10 A      |
| • at 400 V rated value   | 3 A       |
| • at 500 V rated value   | 2 A       |
| • at 690 V rated value   | 1 A       |
| <b>Operating current at 1 current path at DC-12</b>              |           |
| • at 24 V rated value  | 10 A      |
| • at 110 V rated value   | 3 A       |
| • at 220 V rated value   | 1 A       |
| • at 440 V rated value   | 0.3 A     |
| • at 600 V rated value   | 0.15 A    |
| <b>Operating current with 2 current paths in series at DC-12</b> |           |
| • at 24 V rated value  | 10 A      |
| • at 60 V rated value  | 10 A      |
| • at 110 V rated value   | 4 A       |
| • at 220 V rated value   | 2 A       |
| • at 440 V rated value   | 1.3 A     |
| • at 600 V rated value   | 0.65 A    |
| <b>Operating current with 3 current paths in series at DC-12</b> |           |
| • at 24 V rated value  | 10 A      |
| • at 60 V rated value  | 10 A      |
| • at 110 V rated value   | 10 A      |
| • at 220 V rated value   | 3.6 A     |
| • at 440 V rated value   | 2.5 A     |
| • at 600 V rated value   | 1.8 A     |
| <b>Operating frequency at DC-12 maximum</b>                      | 1 000 1/h |
| <b>Operating current at 1 current path at DC-13</b>              |           |
| • at 24 V rated value  | 10 A      |
| • at 110 V rated value   | 1 A       |
| • at 220 V rated value   | 0.3 A     |
| • at 440 V rated value   | 0.14 A    |
| • at 600 V rated value   | 0.1 A     |
| <b>Operating current with 2 current paths in series at DC-13</b> |           |
| • at 24 V rated value  | 10 A      |
| • at 60 V rated value  | 3.5 A     |
| • at 110 V rated value   | 1.3 A     |
| • at 220 V rated value   | 0.9 A     |
| • at 440 V rated value   | 0.2 A     |
| • at 600 V rated value   | 0.1 A     |

|   |  |
|---|--|
| <b>Operating current with 3 current paths in series at DC-13</b>    |  |
| • at 24 V rated value   | 10 A   |
| • at 60 V rated value   | 4.7 A  |
| • at 110 V rated value  | 3 A  |
| • at 220 V rated value  | 1.2 A  |
| • at 440 V rated value  | 0.5 A  |
| • at 600 V rated value  | 0.26 A   |
| <b>Operating frequency at DC-13 maximum</b>                         | 1 000 1/h  |
| <b>Design of the miniature circuit breaker</b>                      |  |
| • for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 6 A; 0.4 kA  |
| <b>Contact reliability of auxiliary contacts</b>                    | 1 faulty switching per 100 million (17 V, 1 mA)  |
| <b>UL/CSA ratings</b>   |  |
| <b>Contact rating of auxiliary contacts according to UL</b>         | A600 / Q600  |
| <b>Short-circuit protection</b>                                     |  |
| <b>Design of the fuse link</b>                                      |  |
| • for short-circuit protection of the auxiliary switch required     | fuse gL/gG: 10 A   |
| <b>Installation/ mounting/ dimensions</b>                           |  |
| <b>Mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b>  | screw and snap-on mounting onto 35 mm standard mounting rail   |
| <b>Height</b>   | 70 mm  |
| <b>Width</b>  | 45 mm  |
| <b>Depth</b>  | 73 mm  |
| <b>Required spacing</b>   |  |
| • for grounded parts<br>— at the side                               | 6 mm   |
| • for live parts<br>— at the side                                   | 6 mm   |
| <b>Connections/Terminals</b>  |  |
| <b>Type of electrical connection</b>                                |  |
| • for auxiliary and control current circuit                         | spring-loaded terminals  |
| <b>Type of connectable conductor cross-sections</b>                 |  |
| • for auxiliary contacts<br>— single or multi-stranded              | 2x (0,5 ... 4 mm²)   |
| — finely stranded with core end processing                          | 2x (0.5 ... 2.5 mm²)   |
| — finely stranded without core end processing                       | 2x (0.5 ... 2.5 mm²)   |

- at AWG conductors for auxiliary contacts

2x (20 ... 12)

## Safety related data


|   |                                      |
|---|--------------------------------------|
| <b>B10 value</b>  |                                      |
| <ul style="list-style-type: none"> <li>• with high demand rate acc. to SN 31920</li> </ul>            | 1 000 000; With 0.3 x I <sub>e</sub> |
| <b>Proportion of dangerous failures</b>   |                                      |
| <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> </ul>             | 40 %                                 |
| <ul style="list-style-type: none"> <li>• with high demand rate acc. to SN 31920</li> </ul>            | 73 %                                 |
| <b>Failure rate [FIT]</b>   |                                      |
| <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> </ul>             | 100 FIT                              |
| <b>Product function</b>   |                                      |
| <ul style="list-style-type: none"> <li>• positively driven operation acc. to IEC 60947-5-1</li> </ul> | Yes                                  |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>                             | 20 y                                 |

## Certificates/approvals

| General Product Approval  | Functional Safety/Safety of Machinery   | Declaration of Conformity  |
|---|---|--|
| <br>CCC | <br>EAC | <br>EG-Konf. |
| <br>CSA | <a href="#">Type Examination</a>  |  |
| <br>UL  |   |  |

| Test Certificates                                  | Marine / Shipping   |
|--|---|
| <a href="#">Special Test Certificate</a>           | <br>ABS            |
| <a href="#">Type Test Certificates/Test Report</a> | <br>BUREAU VERITAS |
|  | <br>GL           |
|  | <br>LRS          |

| Marine / Shipping   | other                                       |
|---|---|
| <br>PRS                    | <a href="#">Environmental Confirmations</a> |
| <br>RINA                   | <a href="#">Confirmation</a>                |
| <br>RMRS                   |   |
| <br>DNV-GL<br>DNVGL.COM/AF |   |

| other  |
|--|
| <br>VDE |

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2140-2AB00>

### Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2140-2AB00>


### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RH2140-2AB00>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2140-2AB00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2140-2AB00&lang=en)

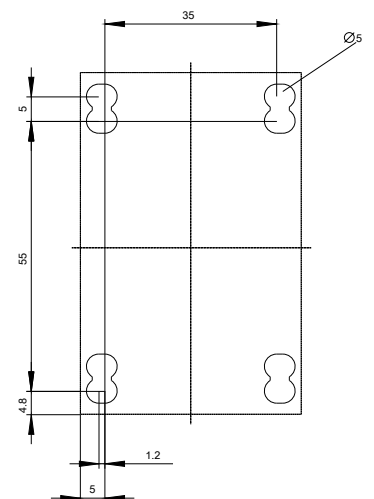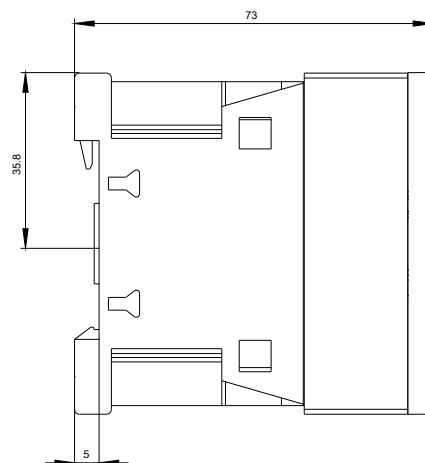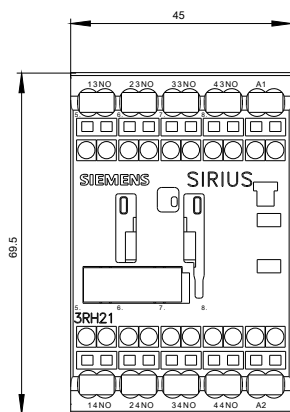

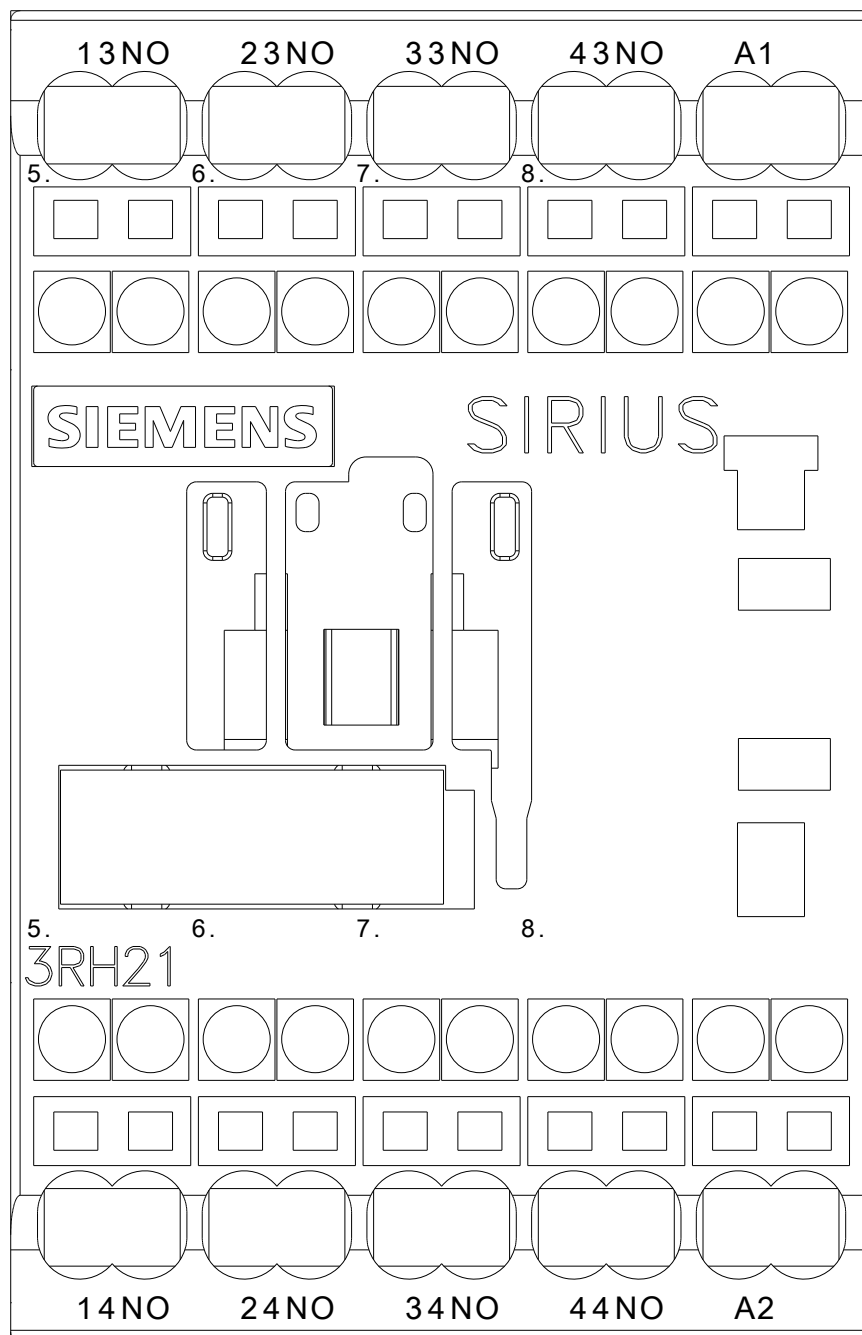

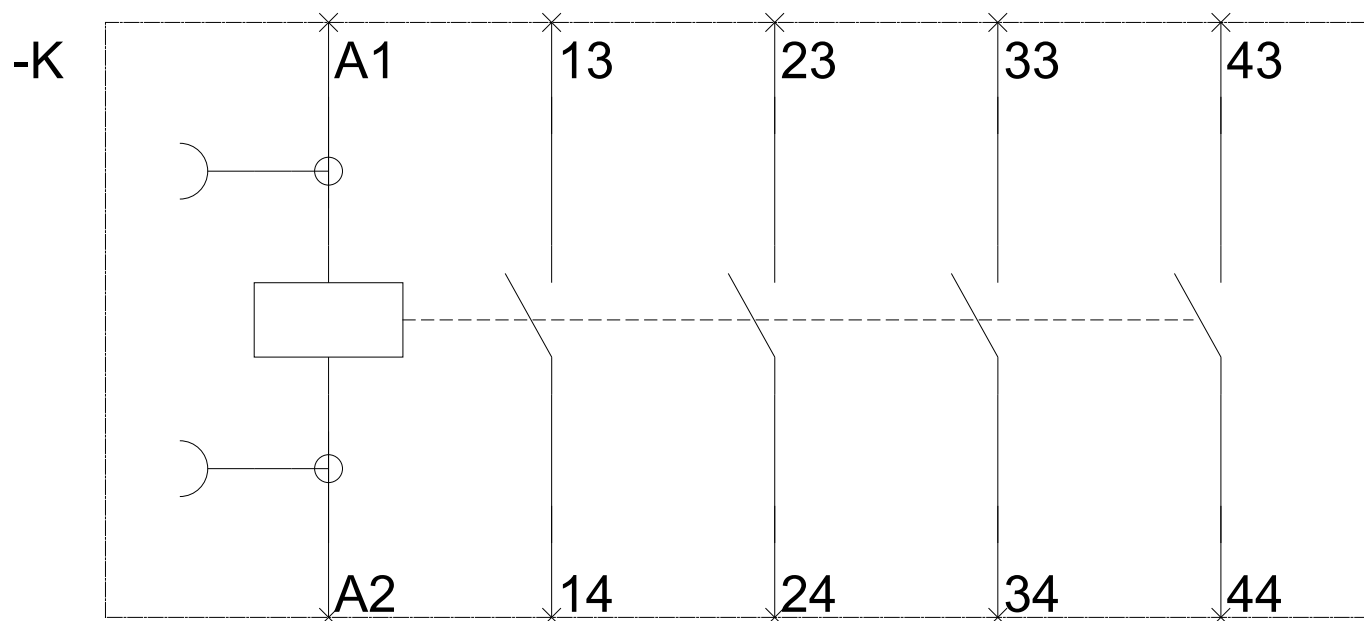

last modified:

07/14/2017