

BU Cover 30 For ET 200SP motor starter protects empty locations



Figure similar

Product category	Accessories
Product designation	Base Unit cover
Product type designation	BaseUnit cover
General technical data	
Product function	Zubehör
Degree of pollution	2
Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
Installation/ mounting/ dimensions	
Mounting position	vertical, horizontal, flat
Mounting type	pluggable on BaseUnit
Height	135 mm
Width	30 mm
Depth	60 mm
Ambient conditions	
Ambient temperature	

- during operation
- during storage
- during transport

-25 ... +60 °C
-40 ... +70 °C
-40 ... +70 °C

Certificates/approvals

General Product Approval			Declaration of Conformity	Test Certificates	Shipping Approval
				Type Test Certificates/Test Report	
CSA	UL		EG-Konf.		ABS

Shipping Approval	other	
	Confirmation	Environmental Confirmations
LRS		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1908-1CA00-0BP0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1908-1CA00-0BP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1908-1CA00-0BP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-1CA00-0BP0&lang=en

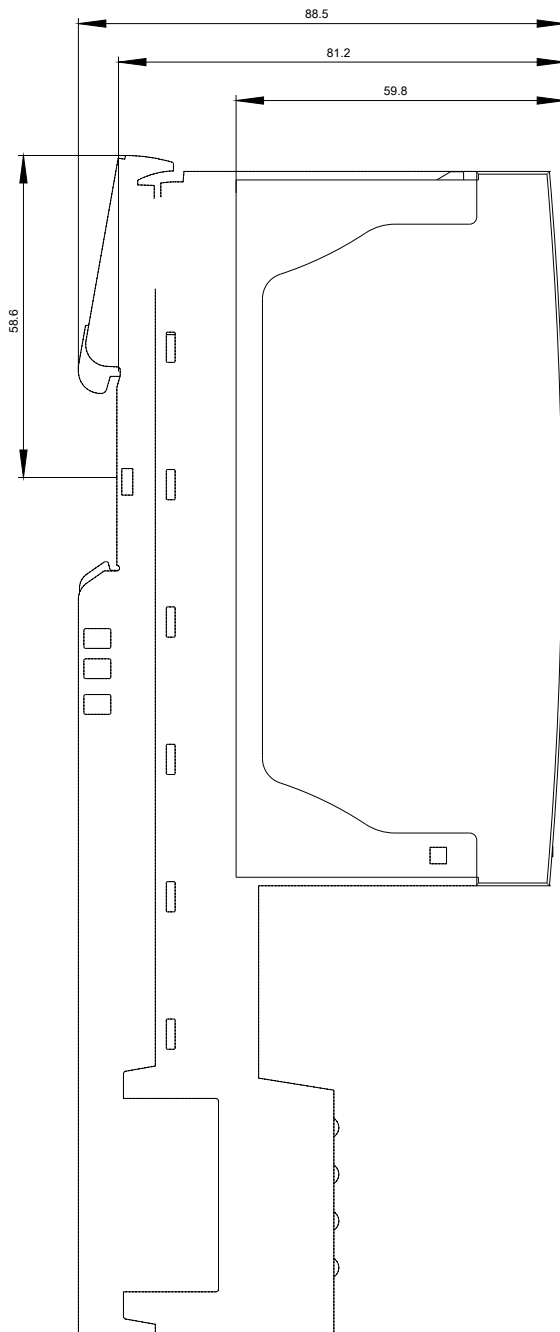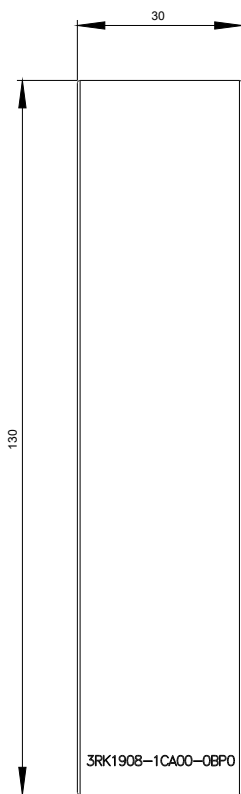

last modified:

10/06/2017