

AUXILIARY CIRCUIT CONNECTOR ACCESSORY FOR: ALL
DRAW-OUT UNITS 3VA



Model	
product brandname	SETRON
Product designation	Auxiliary circuit connector
Design of the product	Accessories 3VA draw-out units
General technical data	
Degree of pollution	3
Overvoltage category	III
Voltage	
Tension assignée d'isolement Ui	500 V
Tension assignée de tenue aux chocs	4 kV
Rated operational voltage Ue at AC 50 Hz	500 V
Rated operational voltage Ue with DC	250 V
Electricity	
Thermal current	10 A
Mechanical Design	
Height	88 mm
Width	15 mm

Depth	55 mm
Net weight	54 g

Connections according IEC

Wire stripping length	15 mm
Connectable conductor cross-section	
• minimum	0.5 mm ²
• maximum	2.5 mm ²
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	14
Tightening torque	
• with screw-type terminals / maximum	0.5 N·m
• with screw-type terminals / minimum	0.4 N·m

Connections according UL

Wire stripping length [in]	0.6 in
Tightening torque [lbf·in] / with screw-type terminals	
• minimum	3.5 lbf·in
• maximum	4.4 lbf·in

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
--------------------------	-----	---------------------------	-------------------	-------



[Typprüfbescheinigung/Werkszeugnis](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9987-0KD80>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA9987-0KD80/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9987-0KD80

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

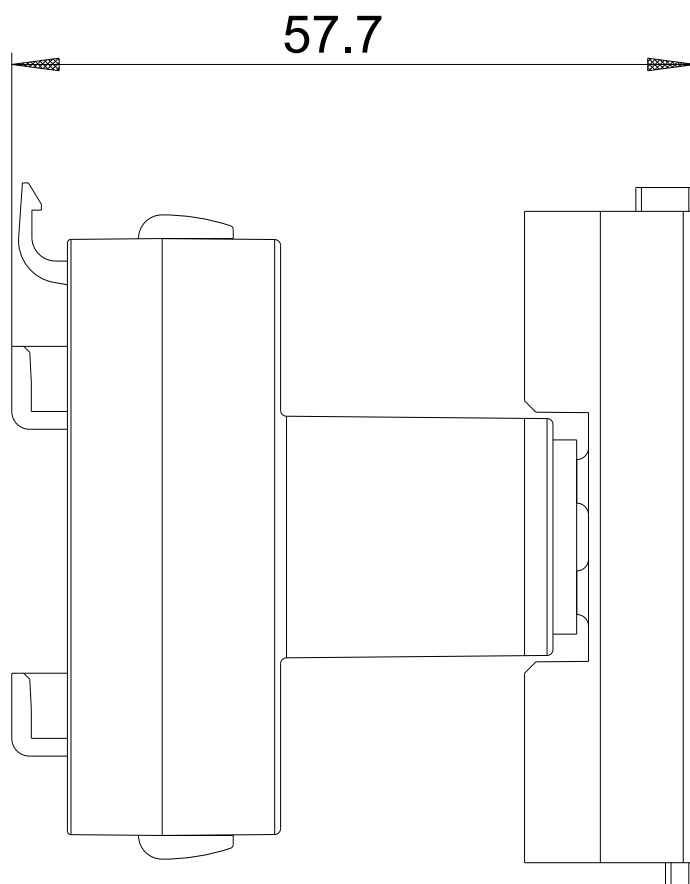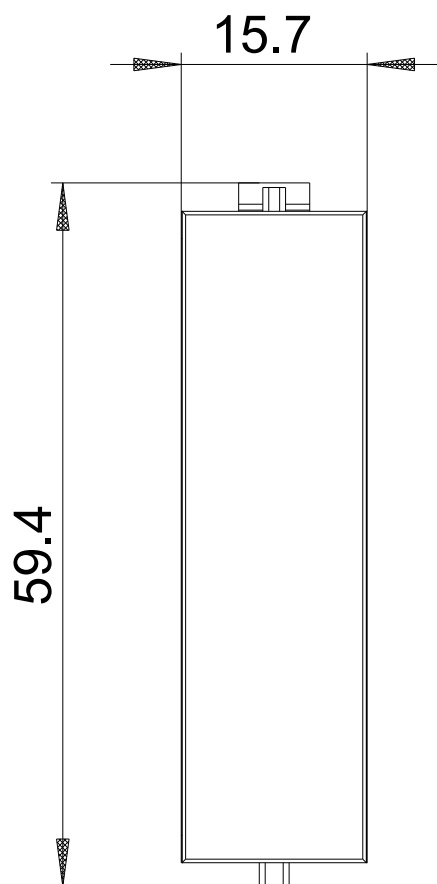

last modified:

05/18/2017